



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number: **0 448 717 B1**

**EUROPEAN PATENT SPECIFICATION**

- (45) Date of publication of patent specification: 29.11.95 (51) Int. Cl.<sup>8</sup>: **C04B 28/02**, C04B 24/24,  
C04B 24/26, C08F 220/04,  
(21) Application number: 90910905.0 C08F 220/20, C08F 220/26,  
C08F 220/58, C08G 59/18,  
(22) Date of filing: 23.07.90 C08G 59/40, C08F 8/00
- (86) International application number:  
PCT/JP90/00946
- (87) International publication number:  
WO 91/01282 (07.02.91 91/04)

**CEMENT ADMIXTURE, PRODUCTION THEREOF, AND CEMENT COMPOSITION.**

- |   |  |
|---|--|
| <p>(30) Priority: 25.07.89 JP 190656/89<br/>05.09.89 JP 228313/89<br/>09.10.89 JP 262242/89<br/>17.11.89 JP 297455/89</p> <p>(43) Date of publication of application:<br/>02.10.91 Bulletin 91/40</p> <p>(45) Publication of the grant of the patent:<br/>29.11.95 Bulletin 95/48</p> <p>(84) Designated Contracting States:<br/>CH DE FR GB IT LI</p> <p>(56) References cited:<br/>EP-A- 0 240 586 EP-A- 0 256 144<br/>EP-A- 0 291 590 JP-A- 6 230 648<br/>JP-A-62 119 147 JP-A-62 216 950<br/>JP-A-62 292 664 JP-A-63 291 840</p> <p>CHEMICAL ABSTRACTS, vol. 110, no. 13, 26<br/>June 1989, Columbus, Ohio, US; abstract no.<br/>236342D, P: page 298 ;</p> | <p>(73) Proprietor: NIPPON SHOKUBAI CO., LTD.<br/>1-1, Koralbashl, 4-chome<br/>Chuo-ku,<br/>Osaka-shi,<br/>Osaka-fu 541 (JP)</p> <p>(72) Inventor: TAHARA, Hideyuki<br/>1-49, Minamieguchi 3-chome,<br/>Higashiyodogawa-ku<br/>Osaka-shi,<br/>Osaka 533 (JP)<br/>Inventor: ITO, Hiroshi<br/>18-17, Kitashowadal-cho<br/>Takatsuki-shi,<br/>Osaka 569 (JP)<br/>Inventor: MORI, Yasuhiro<br/>525-6, Kokuroda-cho<br/>Matsuzaka-shi,<br/>Mie 515 (JP)<br/>Inventor: MIZUSHIMA, Makoto<br/>4-52, Nakanoshima-cho<br/>Suita-shi, Osaka 564 (JP)</p> |
|---|--|

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

**EP 0 448 717 B1**

⑦A Representative: **Pacitti, Pierpa lo A.M.E. et al**  
**Murgltr yd and Company**  
**373 Scotland Street**  
**Glasgow G5 8QA (GB)**

---

## Description

## [TECHNICAL FIELD]

5 The present invention relates to a cement additive having an ability to prevent slump loss and, in detail, relates to a chemical which is combined with a cement composition such as cement mortar and concrete etc. and elevates efficiency in the workability by that the flowability of the cement composition is increased and its decrease with time passage (hereinafter, referred to as the " slump loss ") is prevented, and relates to a method for producing such a cement additive. Furthermore, the present invention relates to a cement  
10 composition which is combined with a cement additive of the above kind.

## [BACKGROUND ART]

The cement composition such as mortar and concrete etc. shows a decrease in consistency with time  
15 passage after combination by the hydration of cement with water or others and thereby, the efficiency in the execution of works lowers. This phenomenon is generally called as a slump loss.

The slump loss in the cement composition causes, on ready mixed concrete, trouble such as limitation of time allowed for transportation, degeneration of quality and impairment of workability owing to a waiting time in a concrete-placing field, and a decrease in durability due to a cold joint and so on. Also, in a factory  
20 for producing concrete secondary products, when transportation of a cement composition by a pump pressure is temporarily stopped by taking a lunch time or due to any trouble and, some times later, the transportation by pressure is reopened, the slump loss may cause such an accident as a sudden increase in the transportation pressure or full closure of a pump and may cause such a problem as incomplete filling in a delaying case of moulding such as compaction for some reason. Therefore, in the factories for  
25 producing ready-mixed concrete and for producing concrete secondary products and in the other places, the slump loss in a cement composition is an important subject to be solved in order to control the quality of cement compositions and to improve the efficiency in the execution of works.

As a method to prevent the slump loss have been so far known the following methods.

- (1) A method in which an unit amount of water in concrete is increased.
- 30 (2) A method which comprises a post-addition of a cement additive.
- (3) A method which comprises a repeating addition of a cement additive.
- (4) A method which comprises an addition of a retarder or a combined use with a cement additive.
- (5) A method in which a cement additive of a granular type is used.
- (6) A method in which a cement additive is contained in an organic hydrogel.
- 35 (7) A method which comprises an addition of a cement additive that undergoes slow-release of a dispersing effect for cement resulting from slow hydrolysis by an alkali.

Said method (1) comprises an increase of an unit amount of water which is estimated with the slump loss up to placing of a cement composition and, even if an improvement in the workability is attempted by this method, the method may accompany such a disadvantage in quality as a loss of strength of a  
40 hardening product and crack occurrence resulting from drying shrinkage cause a decrease in durability or such a disadvantage in economy as an increase in an unit amount of cement which needs to get a defined strength.

Said method (2) is a temporary improvement for a flowability and a cement additive remains locally in the cement composition after an attempt to maintain the slump has finished and, as a result, there will be  
45 brought a bad effect such as occurrence of local bleeding and thereby, a loss of strength.

Said method (3) comprises a readdition of an additive at a time of that the slump loss takes place, and it is not a complete prevention for the slump loss. Also, there is a disadvantage in the workability and economy due to the repeating addition.

Said method (4) in tends maintenance of the flowability by that a delay of time necessary for  
50 coagulation of a cement composition is in tended by using only a delaying agent such as a hydroxycarboxylate, a ligninsulfonate, a dextrin, and a humic acid etc. or by using those in combination with a cement additive and, therefore, in a case of an excess addition there is a danger of accidents such as a loss of strength and inferior setting.

Th method (5) is the one in which a condensation product of naphthalenesulfonic acid with formalin is  
55 granulated and gradually dissolved in a cement composition to prevent the slump loss (Japanese Official Patent Provisional Publication, showa 54-139929) or the one in which a copolymer of an olefin with an ethylenic unsaturated dicarboxylic acid anhydride gradually undergoes hydrolysis in a cement composition to prevent the slump loss (Japanese Official Patent Provisional Publications, showa 60-16851 and heisei 1-

122947). But in both the methods, the granular additive is dispersed in solution, the methods involve localization of the additive and a problem in storage stability. Furthermore, to prevent said localization of an additive and the problem in storage stability, there has been proposed a method in which a finely granulated cement additive is obtained by that a solution being dispersed with a copolymer of a vinylic compound with an ethylenic unsaturated dicarboxylic acid anhydride is stirred with a rigid body media (Japanese Official Patent Provisional Publication, showa 62-241855), but this method requires a device such as a sand mill for stirring, so that the production process becomes complex.

The method (6) is the one in which a cement-dispersing agent is contained in such an organic water-containing gel as polyacrylic acid etc. and it gradually releases in the cement paste (Japanese Official Patent Provisional Publication, showa 63-162562), but because it involves a gel which is not dissolved in water, there is a problem in storage stability such as separation and precipitation etc.

The method (7) comprises a method in which as a cement additive, a poly(meth)acrylic acid ester is used in combination with such a cement-dispersing agent as sodium ligninsulfonate, sodium melaminesulfonate, and sodium polyacrylate (Japanese Official Patent Provisional Publication, showa 60-161365), and a method in which dispersion of cement particles is intended by using methyl poly(meth)acrylate or a copolymer of t-butyl maleate with isobutylene [A. Ohta, Y. Tanaka, and T. Uryu: Polymer Preprints, Japan Volume 38, No. 3 (1989)]. In the polymers which are used as cement additives of the forementioned kinds, the carboxyl groups directly binding to a carbon atom of the main chain are all esterified. Because of this, when the polymers are combined with a cement composition, they are hardly compatible with water and the cement composition becomes non-uniform and the setting inferiority etc. often takes place due to local existence of the additive.

Like this, all the methods have their own defects and there has not been found any satisfactory cement additive.

EP-A-256144 of National Starch and Chemical Corporation describes a cement mixture and an aqueous emulsion of a cationic acrylate polymer having a Tg between below 10°C and -40°C. Unlike the present invention, the acrylate polymer is not water-soluble.

In CA 110: 236342d Nippon Shokubai discloses a cement composite with crack resistance and high water absorption. The cement composite contains a water absorptive resin obtained by polymerisation of monomers having at least 5 mol% of a particular sulfonated monomer.

A similar cement composite is also described in EP-A-0,291,590 wherein a specific sulfonic acid type monomer is included to impart high flowability to the cement.

Thus, the first subject of the present invention is to provide a cement additive which, by being added to a cement composition, is able to improve said defects, enhance its flowability, and prevent the slump loss. The second subject of the present invention is to provide a method for producing such a superior cement additive as forementioned and also, with which a molecular structural design is easy. The third subject of the present invention is to provide a production method which can produce such a superior cement additive as forementioned by taking only a short process. Furthermore, the fourth subject of the present invention is to provide a cement composition in which said superior cement additive is combined.

#### [DISCLOSURE OF INVENTION]

The present inventors have considered, in order to improve the defects in said methods of (1) to (4), that the use of a cement additive which gradually displays a dispersing effect on the cement in a cement composition is essential, and thus we carried out examination of the cement additive. However, since the cement additive in said method (5) uses a phenomenon of that a solid gradually dissolves into an aqueous solution, and since the cement additive in said method (6) contains a cement-dispersing agent in an organic water-containing gel, there has occurred such a problem as the additive exists locally, as the forementioned. In the cement additive of said method (7), the carboxyl groups directly binding with a main chain of the polymer are all esterified, so that a problem of the above kind also takes place.

On the other hand, if a cement additive takes form of an aqueous solution or a water dispersing form by being mixed beforehand with a part of water for mixing and kneading, there is an advantage that its handling may be very easy, but such a form in use may be not possible in the case of a solid which does not dissolve in ordinary water or in the case of a cement additive composed of a hydrogel.

Among the hitherto-used cement additives which are described above, a cement additive of which the dissolving proceeds with hydrolysis may be preserved in mixing with ordinary water, but storage stability is inferior because a dispersing state in water is not maintained and the additive precipitates.


Therefore, the present inventors considered that, if the dispersing effect with conversion of a polymer into a compound of low molecular weight is arranged, such a problem of that a cement additive exists

locally in a cement composition or the storage stability in water is inferior may be solved. Thus, we carried out examination of such polymers. As a result, we found that a crosslinked polymer containing a defined crosslinking chain is effective, and we attained the present invention.

Accordingly, to solve said first subject, the present invention provides a cement additive composed of a crosslinked polymer in which a bond is formed between main chains having a water-soluble polymer structure of a molecular weight from 500 to 100,000 and wherein said bond has as a structural unit at least one group selected from divalent groups of formula (I)



wherein  $R^1$  and  $R^2$  independently denote any one of the following groups:



$R$  and  $R'$  independently denote an alkyl group of carbon number of 1 to 5; with the proviso that where  $R^2$  is a group










then group  $R^1$  may be present or absent; and wherein said main chains have at least one kind of functional group selected from the following groups 1 to 5:

- ①  $-COOH$
- ②  $-COO-(R^5O)_m-R^6-SO_3M$
- ③  $-CONH-R^7-SO_3M$
- ④  $-(CH_2)_n-SO_3M$
- ⑤  $-\text{C}_6\text{H}_4-SO_3M$

wherein  $m$  is 0 or an integral number of 1 to 50;  $n$  is 0 or 1;  $M$  denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group;  $R^5$  and  $R^6$  independently denote an alkylene group of carbon number 2 to 4;  $R^7$  denotes an alkylene group of carbon number 1 to 5; and when  $m$  is 2 or more, each  $R^5O$  group may be identical or different and their arrangement may be regular or irregular.

Also said main chain has, for example, at least one kind of functional group of said groups 1 to 5 and at least one functional group selected from the functional groups 6 to 12 as well:

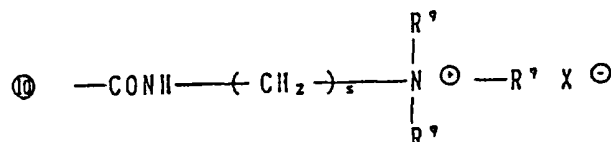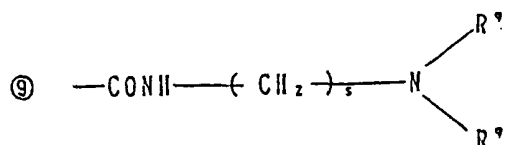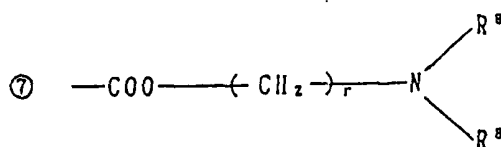

wherein p is an integral number of 1 to 10; q is 0 or an integral number of 1 to 100; r and s are, independently, an integral number of 1 to 3; t and u are, independently, an integral number of 1 to 100; A<sup>1</sup> is a divalent or trivalent ring-opened group of an alkyleneimine of 2 to 4 carbon atoms (in a case of a divalent group, A<sup>1</sup> is a straight chain type and, in a case of a trivalent group, A<sup>1</sup> is a branched type); R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>8</sup> denotes CH<sub>3</sub> or C<sub>2</sub>H<sub>5</sub>; R<sup>9</sup> denotes H, CH<sub>3</sub>, or C<sub>2</sub>H<sub>5</sub>; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; X<sup>o</sup> denotes an anionic pair ion; when p is two or more, each A<sup>1</sup> group may be identical or different and their arrangement may be regular or irregular; when q is not 0, the arrangement of A<sup>1</sup> and R<sup>5</sup>O may be normal or reversed and may be regular or irregular; when q is 2 or more, t is 2 or more, and u is 2 or more, respectively, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; and when a group denoted by the same symbol is present two or more times, all these groups do not need to be identical.

To solve said second subject, the present invention also provides a method for producing a cement additive wherein water-soluble polymers of molecular weight 500 to 100,000 are combined to one another by using a crosslinking agent which has and/or is capable of forming a structural unit wherein at least one group selected from said formula (I) is present and/or is capable of forming such a group to obtain a crosslinked polymer.

Said water-soluble polymer may have, for example, at least one kind selected from the functional groups of the abovementioned 1 to 5, or has at least one kind selected from the functional groups of the abovementioned 1 to 5 and at least one kind selected from the functional groups of the abovementioned 6 to 12.

To solve said third subject, the present invention further provides a method for producing a cement additive, a method for producing a cement additive wherein a crosslinked polymer is obtained by a polymerization reaction between a monomer (f), which has two or more polymerizable double bonds and has located between these bonds a structural unit of at least one group selected from the divalent groups of said formula (I), together with the monomer (f), which has one polymerizable double bond capable of copolymerizing with the double bond in (e) and is able to form a main chain structure capable of leading to a water-soluble polymer of a molecular weight of 500 or more to 100,000.


To solve said fourth subject, the present invention provides a cement composition, of which essential components are a cement additive composed of said specially defined crosslinked polymer, cement, and water. Also, it provides a cement composition in which a cement additive obtained by said specified method, cement and water are essential components.

5 The crosslinked polymer used in the present invention has a structure in which main chains of two or more are one another crosslinked. Said main chains are composed of carbon-carbon bonds only or has a structure in which the bonds are a main body. The main chains convert into a water-soluble polymer having an ability capable of dispersing cement, by that the crosslinking chains are cleaved. Moreover, here the crosslinking chain means a divalent group being represented by said formula (I) (this is a case that only one  
10 divalent group is contained) and, in a case of that two or more of the divalent group being represented by said formula (I) is contained, the crosslinking chain means a structure between each of the divalent groups locating at the separated, furthest positions.



Said crosslinking bond is a bond having at least one group selected from the divalent groups being represented by said formula (I). Although this bond has an ester bond, its position is important. That is,  
15 either the ester bond locates at a position apart from a main chain carbon atom at least by one carbon atom, or in a case of that the ester bond is directly bound to a main chain carbon atom, in a structure being represented by said formula (I)  $R^2$  is following:



25 The bond of this kind is cited, for example, as following three kinds, but is not limited within the kinds.



[wherein  $R^{20}$  denotes, for example, a divalent group modified from alkylene oxide.]








45 [wherein  $R^{21}$  denotes, for example, alkylene group. Moreover, when a number of  $R^{21}$  is 2 or more, all the  $R^{21}$  do not need to be an identical group.]

A cement-dispersing ability and solubility in water of said water-soluble polymer are given by at least one functional group in the functional groups of said ① to ⑤ being involved in said main chain, or given by at least one functional group in the functional groups of said ① to ⑤ and at least one group in the  
50 functional groups of said ⑥ to ⑬. In the functional groups of said ① to ⑤, M is anyone of a hydrogen atom, mono-, di-, or trivalent metal, an ammonium group, or an organic amine group. The monovalent metal is, for example, sodium and potassium. The divalent metal is, for example, magnesium, calcium, and barium. The trivalent metal is, for example, aluminum. The organic amine group is, for example, trimethylamine, triethylamin, and triethanolamine.




55 Said water-soluble polymer has an average molecular weight of 500 to 100,000 and, preferably, an average molecular weight of a range from 3,000 to 50,000, more preferably, an average molecular weight of a range from 5,000 to 30,000. A water-soluble polymer of this kind is crosslinked one another by said specially defined bond to form a crosslinked polymer. A crosslinking agent used for forming a crosslinked

polymer is preferred to have, for example, an average molecular weight of a range from 100 to 5,000, more preferably, it has an average molecular weight of 1,000 or less. Also, the monomer (e) is preferred to have, for example, an average molecular weight of a range from 200 to 5,000. Besides, the water-soluble polymer needs not to have a molecular weight larger than that of the crosslinking agent. If the molecular weight of a water-soluble polymer deviates from said range, the dispersing character may be inferior or the air amount may abnormally increase. Because of this, said crosslinked polymer is very hydrophilic and, in a preferable case, shows solubility in water.

Said water-soluble polymer is, for example, at least one kind of compound selected from a homopolymer and a copolymer which is led by using at least one kind of monomer selected from the monomers of the undermentioned (i) to (vi), and selected from the addition reaction products having at least either one of the structural units in said the undermentioned (vii) and (viii), which are led from an addition reaction of the group (-COOM) being involved in the above polymers with at least alkyleneimine in a group of an alkyleneimine and an alkylene oxide.

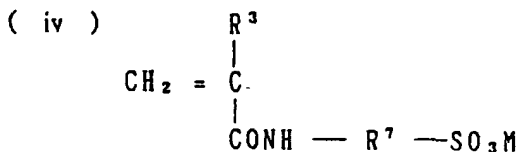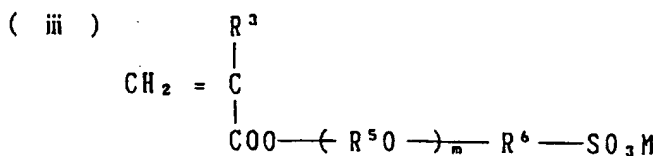









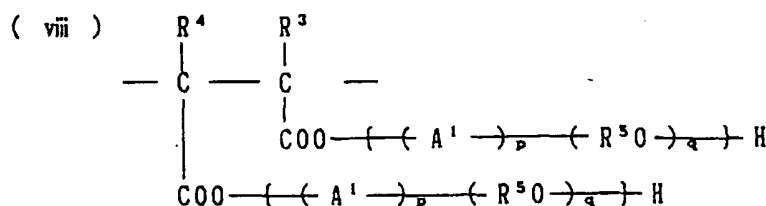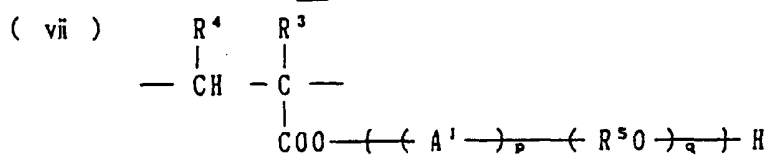

20 [Here, m is 0 or an integral number of 1 to 50; n is 0 or 1; p is an integral number of 1 to 10; q is 0 or an integral number of 1 to 100; M is any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> and R<sup>4</sup> independently are H or CH<sub>3</sub>; R<sup>5</sup> and R<sup>6</sup> independently represent an alkylene group of carbon number of 2 to 4; R<sup>7</sup> represents an alkylene group of carbon number of 1 to 5; and A<sup>1</sup> is a divalent or trivalent ring-opened group of carbon number of 2 to 4 (it is a straight chain type in a case of the divalent and a branched type in a case of the trivalent). Moreover, when m is 2 or more and when q is 2 or more, respectively, each R<sup>5</sup>O may be identical or different and, when each R<sup>5</sup>O group is different, their arrangement may be regular or irregular. When p is 2 or more, each A<sup>1</sup> may be identical or different and, when each A<sup>1</sup> is different, their arrangement may be regular or irregular. When q is not 0, the arrangement of A<sup>1</sup> and R<sup>5</sup>O may be normal or reverse and may be regular or irregular. When a group or number being represented by an identical symbol in one formula is 2 or more, the group or number all do not need to be an identical group or number.]

35 Said water-soluble polymer is at least one kind of compound, for example, selected from a copolymer which is led by using at least one kind of monomer selected from the monomers of the forementioned (i) to (vi) and at least one kind of monomer selected from the monomers of the undermentioned (ix) to (xiv), and selected from the addition reaction products having at least either one of the structural units in said the forementioned (vii) and (viii), which are led from an addition reaction of the group (-COOM) being involved in the above copolymers with at least alkyleneimine in a group of an alkyleneimine and an alkylene oxide with.

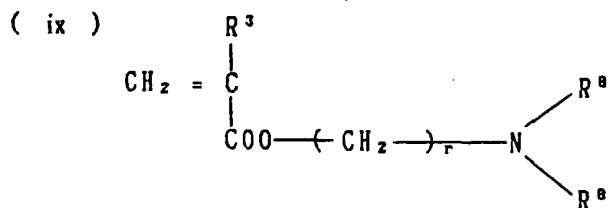

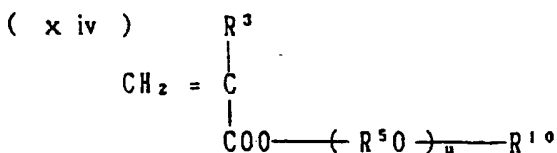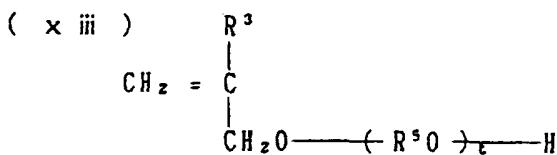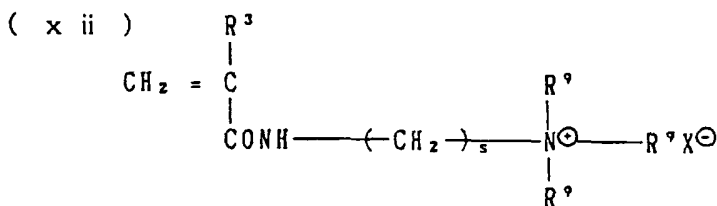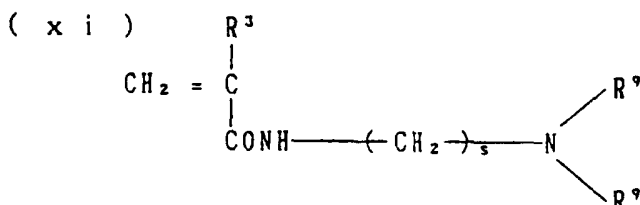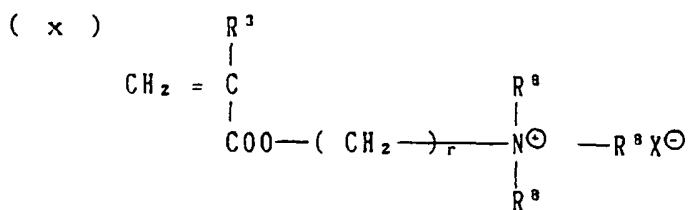

[Here, r and s are, respectively, an integral number of 1 to 3; t and u are, respectively, an integral number of 1 to 100; R<sup>3</sup> and R<sup>4</sup> are, respectively, H or CH<sub>3</sub>; R<sup>5</sup> is an alkylene group of carbon number of 2 to 4; R<sup>6</sup> is CH<sub>3</sub> or C<sub>2</sub>H<sub>5</sub>; R<sup>9</sup> is H, CH<sub>3</sub>, or C<sub>2</sub>H<sub>5</sub>; R<sup>10</sup> is H or an alkyl group of carbon number of 1 to 5; and X<sup>9</sup> is an anionic pair ion. Besides, when t is 2 or more and when u is 2 or more, respectively, each R<sup>5</sup>O may be identical or different and, when each R<sup>5</sup>O group is different their arrangement may be regular or irregular. When a group being represented by the same symbol in a formula is contained in two or more, all the groups do not need to be identical.

In a case that a water-soluble polymer and crosslinked polymer have said groups (vii) and/or (viii), such a water-soluble polymer and crosslinked polymer are, for example, obtained by the following. To a group (-COOM) which a water-soluble polymer has, at least alkyleneimine in a group of alkyleneimine and alkyleneoxide is added by means of hitherto known method. The alkyleneimine may be only added, or alkyleneimine and alkyleneoxide may be added together. In a case of the joint addition, they can be simultaneously added to said water-soluble polymer having the group (-COOM) to carry out reaction, or the reaction can be carried out one by one; for example, a reaction of alkyleneimine may be carried out, and then, alkyleneoxide may be added for reaction. As examples of the alkyleneimine of carbon number of 2 to 4 used in the present invention, are cited various compounds, for example, ethyleneimine and propyleneimine etc. are cited as proper examples.

As examples of the monomer (i) used in the present invention are cited acrylic acid and methacrylic acid as well as their monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salts, and organic amine salts, and one kind or two or more kinds of these compounds can be used.

As examples of the monomer (ii) used in the present invention are cited maleic acid and citraconic acid and their anhydrides as well as their monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salts, and organic amine salts, and one kind or two or more kinds of these compounds can be used.

5 As examples of the monomer (iii) used in the present invention are cited, for example, sulfoalkyl (meth)acrylates such as 2-sulfoethyl (meth)acrylate, 2-sulfopropyl (meth)acrylate, 3-sulfopropyl (meth)acrylate, 1-sulfopropan-2-yl (meth)acrylate, 2-sulfobutyl (meth)acrylate, 3-sulfobutyl (meth)acrylate, 4-sulfobutyl (meth)acrylate, 1-sulfobutan-2-yl (meth)acrylate, 1-sulfobutan-3-yl (meth)acrylate, 2-sulfobutan-3-yl (meth)acrylate, 2-methyl-2-sulfopropyl (meth)acrylate, 2-methyl-3-sulfopropyl (meth)acrylate, and 1,1-dimethyl-2-sulfoethyl (meth)acrylate etc., and their monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salts, and organic amine salts; sulfoalkoxypolyalkylene glycol mono(meth)acrylate such as sulfoethoxypolyethylene glycol mono(meth)acrylate, sulfopropoxypolyethylene glycol mono(meth)acrylate, sulfbutoxypolyethylene glycol mono(meth)acrylate, sulfoethoxypolypropylene glycol mono(meth)acrylate, sulfopropoxypolypropylene glycol mono(meth)acrylate, and sulfbutoxypolypropylene glycol mono(meth)acrylate etc., and their monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salts, and organic amine salts. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (iv) used in the present invention are cited, for example, acrylamidomethanesulfonic acid, acrylamidoethanesulfonic acid, acrylamidopropanesulfonic acid, 2-acrylamido-2-methylpropanesulfonic acid, methacrylamidomethanesulfonic acid, and methacrylamidoethanesulfonic acid, and their monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salts, and organic amine salts. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (v) used in the present invention are cited, for example, ethylenesulfonic acid, allyl sulfonic acid, methallyl sulfonic acid, and their monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salt, organic amine salts. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (vi) used in the present invention are cited, for example, sulfonic styrene such as p-styrenesulfonic acid etc. and its monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salt, organic amine salts. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (ix) used in the present invention are cited, for example, dimethylaminoethyl acrylate, diethylaminoethyl acrylate, dimethylaminoethyl methacrylate, and diethylaminoethyl methacrylate, and their monovalent metal salts, divalent metal salts, trivalent metal salts, ammonium salt, organic amine salts. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (x) used in the present invention are cited, for example, the compounds which are obtained from reaction of said monomer (ix) with the hitherto known quaternary reagent, for example, an alkyl halogenide, an aralkyl halogenide, and a dialkylsulfuric acid etc. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (x i) used in the present invention are cited, for example, dimethylaminopropylacrylamide, diethylaminopropylacrylamide, dimethylaminopropylmethacrylamide, and diethylaminopropylmethacrylamide etc. These compounds can be also used as one kind or two or more kinds in combination.

45 As examples of the monomer (x ii) used in the present invention are cited, for example, the compounds which are obtained from reaction of said monomer (x i) with the hitherto known quaternary reagent, for example, an alkyl halogenide, an aralkyl halogenide, and a dialkylsulfuric acid etc. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (x iii) are cited, for example, polyalkylene glycol mono(meth)allyl ether such as polyethylene glycol monoallyl ether, polypropylene glycol monoallyl ether, polyethylene glycol-polypropylene glycol monoallyl ether, polyethylene glycol monomethallyl ether, polypropylene glycol monomethallyl ether, polyethylene glycol-polypropylene glycol monomethallyl ether etc. These compounds can be also used as one kind or two or more kinds in combination.

As examples of the monomer (x iv) are cited, for example, hydroxyethyl (meth)acrylate, polyethylene glycol mono(meth)acrylate, polypropylene glycol mono(meth)acrylate, polybutylene glycol mono(meth)acrylate, methoxypolyethylene glycol mono(meth)acrylate, methoxypolypropylene glycol mono(meth)acrylate, methoxypolybutylene glycol mono(meth)acrylate, ethoxypolyethylene glycol mono(meth)acrylate, ethoxypolypropylene glycol mono(meth)acrylate, ethoxypolybutylene glycol mono(meth)acrylate, polyethyl-

ene glycol polypropylene glycol mono(meth)acrylate, and polyethylene polytetramethylene glycol mono(meth)acrylate etc. These compounds can be also used as one kind or two or more kinds in combination.

In the present invention, as the monomer (f), for example, at least one kind among said monomers from (i) to (vi) can be used, or with this, at least one kind among said monomers from (ix) to (xiv) can be used in combination.

Although the monomer (e) used in the present invention can be produced by a method known in public or by a combination of the methods in public, the representative methods are exemplified as follows.

① A reaction of at least one of monoester diols and polyester polyols with a polymerizable monomer having a functional group capable of reacting with the hydroxyl groups in the above diols.

② A reaction of at least one of monoester dicarboxylic acids and polyester polycarboxylic acids with a polymerizable monomer having a functional group capable of reacting with the carboxyl groups in the above acids.

③ A reaction of at least one of polyols and polyepoxy compounds with a polymerizable monomer having a carboxyl group which is apart from a polymerizable double bond by at least one carbon atom.

④ A reaction of polycarboxylic acids with a polymerizable monomer having a hydroxyl or an epoxy group which is apart from a polymerizable double bond by at least one carbon atom.

⑤ A reaction of at least one of monoester polyepoxy compounds and polyester polyepoxy compounds with a polymerizable monomer having a functional group capable of reacting with the epoxy groups in the above compounds.

As the monoester diols and polyester polyols in the production method ①, are cited reaction products of diol compounds such as ethylene glycol, propylene glycol, diethylene glycol, dipropylene glycol, 1,5-pentanediol, 1,6-hexanediol, and neopentylglycol etc., with dibasic acids such as succinic acid, adipic acid, phthalic acid, hexahydrophthalic acid, and tetrahydrophthalic acid etc.; reaction products of said dibasic acids with cyclic ethers such as ethylene oxide and propylene oxide etc.; reaction products of said diol compounds with hydroxycarboxylic acids such as glycolic acid,  $\alpha$ -hydroxyacrylic acid, salicylic acid, and mandelic acid etc.; reaction products of said hydroxycarboxylic acids with said cyclic ethers; and reaction products of said diols or polyalcohols such as pentaerythritol, trimethylolpropane, trimethylethane, ditrimethylolpropane, and dipentaerythritol etc. with lactones such as  $\beta$ -propiolactone,  $\gamma$ -butyrolactone,  $\delta$ -valerolactone, and  $\epsilon$ -caprolactone etc.

As the polymerizable monomers having a functional group capable of reacting with a hydroxyl group in the production method ①, are cited acrylic acid, methacrylic acid, maleic acid, glycidyl (meth)acrylate, (meth)acryloylaziridine, (meth)acryloyloxyethylaziridine, 2-vinyl-2-oxazoline, 2-isopropenyl-2-oxazoline, isocyanateethyl (meth)acrylate, (meth)acryloyl chloride, and allyl chloride etc.

As the monoester dicarboxylic acids and/or polyester polycarboxylic acids in the production method ②, compounds similar to those exemplified in the production method ① can be used.

As the polymerizable monomers having a functional group capable of reacting with a carboxylic group in the production method ②, are cited allyl alcohol, 2-hydroxyethyl (meth)acrylate, glycidyl (meth)acrylate, (meth)acryloylaziridine, (meth)acryloyloxyethylaziridine, 2-vinyl-2-oxazoline, 2-isopropenyl-2-oxazoline, and isocyanateethyl (meth)acrylate etc.

As the polyols in the production method ③, are cited polycarbonate polyols, polyether polyols, polybutadiene polyols, and hydrogenated polybutadiene polyols etc. in addition to the polyester polyols exemplified in the production method ①. As the polycarbonate polyols are cited addition compounds of 2 to 6 moles of ethylene oxide with compounds such as 1,6-hexanediol, neopentylglycol, 1,4-butanediol, 1,8-octanediol, 1,4-bis-(hydroxymethyl)-cyclohexane, 2-methylpropanediol, dipropylene glycol, dibutylene glycol, and bisphenol A; diols which are reaction products of said diol compounds with dicarboxylic acids such as oxalic acid, malonic acid, succinic acid, adipic acid, azelaic acid, and hexahydrophthalic acid etc.; polycarbonate polyols which have as a diol component a polyester diol etc. that is an addition reaction product of said diol compound with  $\epsilon$ -caprolactone or  $\delta$ -valerolactone; and polycarbonate polyols that are addition reaction products of polycarbonate polyols of the forementioned kinds with ethylene oxide, propylene oxide,  $\epsilon$ -caprolactone, or  $\delta$ -valerolactone. Polycarbonate polyols of the above kinds are easily obtainable as commercial products. For example, are cited Desmophen 2020E (made by Sumitomo-Bayer Polyurethane Co., Ltd., average molecular weight 2000), DN-980 (made by Nippon Polyurethane Co., Ltd., average molecular weight 2000), and DN-981 (made by Nippon Polyurethane Co., Ltd., average molecular weight 1000). As the polyether polyols are cited, for example, polyether polyols which are obtained by a polymerization reaction of a cyclic ether such as ethylene oxide, propylene oxide, butylene oxide, and tetrahydrofuran etc. using a diol compound such as ethylene glycol, propylene glycol, and 1,4-butanediol etc. as an initiator. Polyether polyols of the above kinds are easily obtainable as commercial products. For example, are cited Sannix PP-1000 (a polypropylene glycol of molecular weight 1000, made by Sanyo

Chemical Industries, Ltd.) and PTG-500P (a polytetramethylene glycol of molecular weight 2000, made by Hodogaya Chemical Kogyo Co., Ltd.). As the polybutadienepolyols are cited polymers of 1,4-butadiene or 1,2-butadiene having hydroxyl group at a terminal end of the molecule. Also, as the hydrogenated polybutadiene polyethers are cited compounds in which the unsaturated double bonds in the molecules of said polybutadienepolyols are hydrogenated. These compounds are easily obtainable as commercial products. For example, are cited NISSO-PB G-1000, G-2000, G-3000 (polybutadiene glycol of a liquid type, made by Nippon Soda Co., Ltd.), NISSO-PB GI-1000, GI-2000, GI-3000 (hydrogenated polybutadiene glycol, made by Nippon Soda Co., Ltd.), and Polybd R-45HT (polybutadiene glycol of a liquid type, made by Idemitsu Petro Chemical Co., Ltd.) etc.





10 As the polymerizable monomers having a carboxyl group, which is apart from a polymerizable double bond by at least one carbon or more, in the production method (3), are cited 2-carboxyethyl (meth)acrylate, 4-carboxyphenyl (meth)acrylate,  $\beta$ -(meth)acryloyloxyethyl hydrogen phthalate,  $\beta$ -(meth)acryloyloxyethyl hydrogen succinate,  $\beta$ -(meth)acryloyloxypropyl hydrogen phthalate, and (meth)acryloyloxyethyl trimellitic acid etc.

15 As the polycarboxylic acids in the production method (4) are cited succinic acid, adipic acid, phthalic acid, hexahydrophthalic acid, tetrahydrophthalic acid, tricarballic acid, benzenetricarboxylic acid, and benzenetetracarboxylic acid etc. besides the monoester dicarboxylic acids and polyester polycarboxylic acids exemplified in the production method (2).

As the polymerizable monomers having a hydroxyl group, which is apart from a polymerizable double bond by at least one carbon atom or more, in the production method (4), are cited allyl alcohol, 2-hydroxyethyl (meth)acrylate, 2-hydroxycyclohexyl (meth)acrylate, 2-hydroxybutyl (meth)acrylate, 4-hydroxybutyl (meth)acrylate, 2-hydroxypropyl (meth)acrylate, and 2-hydroxy-3-[(2-methyl-1-oxo-2-propenyl)oxy]propyl acrylate etc.

As the polymerizable monomers having an epoxy group, which is apart from a polymerizable double bond by at least one carbon atom or more, in the production method (4), are cited oxiranylmethyl (meth)acrylate, 9-oxiranylnonyl (meth)acrylate, (3-methyloxiranyl)methyl (meth)acrylate, and 9,10-epoxyoleyl acrylate (Rikares in ESA, made by Shin Nippon Rika Co., Ltd.).

As the monoester polyepoxy compounds and polyester polyepoxy compounds in the production method ⑤, are cited the reaction products of the monoester dicarboxylic acids and/or polyester polycarboxylic acids with epichlorohydrin exemplified in the production method ②; terephthalic acid diglycidyl ester; o-phthalic acid diglycidyl ester; and the compounds having the structures below-pictured etc.

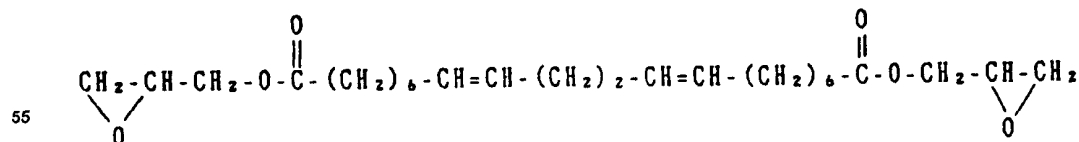

Also, the monomer (e) are obtained not only from said production methods, but also as commercially-  
20 available products. For example, there are cited KAYARAD MANDA, HX-220, HX-620, R-526, DPCA-20,  
DPCA-30, DPCA-60, and DPCA-120 (made by Nippon Kayaku Co., Ltd.).

As examples of the monomer (g) are cited the esters of an aliphatic alcohol of carbon number 1 to 20 with (meth)acrylic acid; (meth)acrylamide; the monoesters or diesters of maleic acid, fumaric acid, or an acid of these kinds with an aliphatic alcohol of carbon number 1 to 20, a glycol of carbon number 2 to 4, or a polyalkylene glycol which is derived With an addition of 2 to 100 moles of said glycols; alkenyl acetates such as vinyl acetate and propenyl acetate etc.; aromatic vinyl compounds such as styrene and p-methylstyrene etc.; vinyl chloride etc. One kind of these compounds or two kinds or more can be used.

Besides, in the present invention, a polymer for dispersing cement hitherto known in public may be used as a water-soluble polymer in the post-crosslinking method. The polymer of such a kind is described in, for example, Japanese Official Patent Gazettes, showa 53-38095, 58-38380, and 59-15359, and heisei 2-11542, Japanese Official Patent Provisional Publications, showa 58-74552, 60-16848, 61-209945, 63-285141, 63-285142, and heisei 63-236742, and the polymer can be used as only one kind or in combination of two kinds or more.

(I) the monomers (i) and (x iv).  
 (II) the monomers (i) and (iv).  
 (III) the monomers (i), (iv), and (x iv).  
 45 (IV) the monomers (i) and (iii).  
 (V) the monomers (i), (iii), and (x iv).  
 (VI) the monomers (e), (i), and (x iv).  
 (VII) the monomers (e), (i), and (iv).  
 (VIII) the monomers (e), (i), (iv), and (x iv).  
 50 (IX) the monomers (e), (i), and (iii).  
 (X) the monomers (e), (i), (iii), and (x iv).

14

crosslinking (hereinafter, a production method of this kind may be referred to as "an one-step crosslinking method").

In a case of the post-crosslinking method, for example, any combination from said (I) to (V) may be adopted. In a case of the one-step crosslinking method, for example, any combination from said (VI) to (X) may be adopted.

In a case of said combination (I), the monomers (x iv) and (i) prefer to be used in a ratio of 1 to 99.9 % by weight of the monomer (x iv) and 99 to 0.1 % by weight of the monomer (i) [here, the total of (x iv) and (i) is 100 % by weight], and they more prefer to be used in such a ratio as 50 to 80 % by weight of (x iv) and 20 to 50 % by weight of (i) [the total of (x iv) and (i) is 100 % by weight]. If the amount of (x iv) is too small, an ability to prevent the slump loss may be inferior and, if too much, the air-entraining may become too much. Also, if the amount of (i) is too small, a dispersing ability may be inferior and, if too much, retardation of hardening may appear.

In a case of said combination (II), the monomers (iv) and (i) prefer to be used in a ratio of 1 to 99 % by weight of the monomer (iv) and 1 to 99 % by weight of the monomer (i) [here, the total of (iv) and (i) is 100 % by weight], and they more prefer to be used in such a ratio as 1 to 40 % by weight of (iv) and 60 to 99 % by weight of (i) [the total of (iv) and (i) is 100 % by weight]. If the amounts of (iv) or (i) deviate from said % range, the dispersing character may be lacking, material segregation may take place, or the slump loss may increase.

In a case of said combination (III), the monomers (iv), (i), and (x iv) prefer to be used in a ratio of 1 to 98 % by weight of the monomer (iv), 1 to 98 % by weight of the monomer (i), and 1 to 70 % by weight of the monomer (x iv) [here, the total of (iv), (i), and (x iv) is 100 % by weight], and they more prefer to be used in such a ratio as 1 to 50 % by weight of (iv), 39 to 94 % by weight of (i), and 5 to 60 % by weight of (x iv) [here, the total of (iv), (i), and (x iv) is 100 % by weight]. If any one of (iv), (i), and (x iv) deviates from said % range, lack of the dispersing character, material segregation, increase of the slump loss, or increase of the air amount may take place.

In a case of said combination (IV), the monomers (iii) and (i) prefer to be used in a ratio of 1 to 99 % by weight of the monomer (iii) and 1 to 99 % by weight of the monomer (i) [here, the total of (iii) and (i) is 100 % by weight], and they more prefer to be used in such a ratio as 1 to 40 % by weight of (iii) and 60 to 99 % by weight of (i) [here, the total of (iii) and (i) is 100 % by weight]. If the amounts of (iii) and (i) deviates from said % range, the dispersing character may be lacking, material segregation may take place, or the slump loss may increase.

In a case of said combination (V), the monomers (iii), (i), and (x iv) prefer to be used in a ratio of 1 to 98 % by weight of the monomer (iii), 1 to 98 % by weight of the monomer (i), and 1 to 70 % by weight of the monomer (x iv) [here, the total of (iii), (i), and (x iv) is 100 % by weight], and they more prefer to be used in such a ratio as 1 to 50 % by weight of (iii), 39 to 94 % by weight of (i), and 5 to 60 % by weight of (x iv) [here, the total of (iii), (i), and (x iv) is 100 % by weight]. If any one of (iii), (i), and (x iv) deviates from said % range, lack of the dispersing character, material segregation, increase of the slump loss, or increase of the air amount may take place.

In a case of said combination (VI), the monomers (e), (x iv), and (i) prefer to be used in a ratio of 0.1 to 50 % by weight of the monomer (e), from 1 to 98.9 % by weight of the monomer (x iv), and 1 to 98.9 % by weight of the monomer (i) [here, the total of (e), (x iv), and (i) is 100 % by weight].

In a case of said combination (VII), the monomers (e), (iv), and (i) prefer to be used in a ratio of 0.1 to 50 % by weight of the monomer (e), 1 to 98.9 % by weight of the monomer (iv), and 1 to 98.9 % by weight of the monomer (i). [the total of (e), (iv), and (i) is 100 % by weight.]

In a case of said combination (VIII), the monomers (e), (x iv), (iv), and (i) prefer to be used in a ratio of 0.1 to 50 % by weight of the monomer (e), 1 to 70 % weight of the monomer (x iv), 1 to 97.9 % by weight of the monomer (iv), and 1 to 97.9 % by weight of the monomer (i). [the total of (e), (x iv), (iv), and (i) is 100 % by weight.] and they more prefer to be used in such a ratio as 1 to 20 % by weight of (e), 5 to 59 % by weight of (x iv), 1 to 49 % by weight of (iv), and 39 to 93 % by weight of (i). [the total of (e), (x iv), (iv), and (i) is 100 % by weight.]

In a case of said combination (IX), the monomers (e), (iii), and (i) prefer to be used in a ratio of 0.1 to 50 % by weight of the monomer (e), 1 to 98.9 % by weight of the monomer (iii), and 1 to 98.9 % by weight of the monomer (i). [the total of (e), (iii), and (i) is 100 % by weight.]

In a case of said combination (X), the monomers (e), (x iv), (iii), and (i) prefer to be used in a ratio of 0.1 to 50 % by weight of the monomer (e), 1 to 70 % weight of the monomer (x iv), 1 to 97.9 % by weight of the monomer (iv), and 1 to 97.9 % by weight of the monomer (i). [the total of (e), (x iv), (iii), and (i) is 100 % by weight.] and they more prefer to be used in such a ratio as 1 to 20 % by weight of (e), 5 to 59 % by weight of (x iv), 1 to 49 % by weight of (iii), and 39 to 93 % by weight of (i). [the total of (e), (x iv), (iii), and

(i) is 100 % by weight.]

Besides, an use of the monomer (x iv) is favored for preparation of a water-soluble polymer which is superior in an ability to prevent the slump loss. Also, an use of the monomer (iii) is favored for preparation of a water-soluble polymer which is very small in an air-entraining amount.

In a case of the post-crosslinking method, said monomer component may be polymerized by using a polymerization initiator in order to prepare said water-soluble polymer. The polymerization may be carried out according to a polymerization in a solvent or a bulk polymerization.

The polymerization in a solvent may be carried out by a batch system or a continuous system and as a solvent used in the polymerization are cited water; lower alcohols such as methyl alcohol, ethyl alcohol, and isopropyl alcohol etc.; aromatic or aliphatic hydrocarbons such as benzene, toluene, xylene, cyclohexane, and n-hexane; ethyl acetate; ketone compounds such as acetone and methyl ethyl ketone etc. From consideration of the solubilities of the monomers as the raw materials and the water-soluble polymers obtained as well as the convenience in use of the water-soluble prepolymers, it is preferred to use at least one kind of compound selected from water and lower alcohols of carbon number of 1 to 4. Among the lower alcohols of carbon number of 1 to 4, methyl alcohol, ethyl alcohol, and isopropyl alcohol are especially effective.

When the polymerization is carried out in a water medium, a water-soluble polymerization-initiator such as persulfate of ammonium or an alkali metal or hydrogen peroxide etc. is used. At this time, an accelerator such as sodium hydrogen sulfite etc. may be used in combination with the polymerization-initiator. Also, when the polymerization is carried out in a solvent such as lower alcohols, an aromatic hydrocarbon, an aliphatic hydrocarbon, ethyl acetate, or a ketone compound, a peroxide such as benzoyl peroxide and lauroyl peroxide etc., a hydroperoxide such as cumene hydroperoxide etc., and an aliphatic azo compound such as azo-bis-isobutyronitrile etc., is used as a polymerization-initiator. At this time an accelerator such as an amine compound may be used in combination with the polymerization-initiator. Furthermore, when a mixture solvent of water and lower alcohols is used, said various polymerization-initiator or a compound selected from a combination of the polymerization-initiator and an accelerator is used with proper selection. Although the polymerization temperature is set depending upon a solvent and polymerization-initiator used, it is usually in a range of 0 to 120 °C.

In the bulk polymerization, a peroxide such as benzoyl peroxide and lauroyl peroxide etc.; a hydroperoxide such as cumene hydroperoxide etc., and an aliphatic azo compound such as azo-bis-isobutyronitrile etc. is used as a polymerization-initiator and the polymerization is carried out in a temperature range of 50 to 150 °C.

A crosslinking agent used in the present invention is a compound which has as a structural unit and/or is capable of forming at least one group selected from the divalent groups being denoted by said formula (I). The crosslinking agent is preferred to be a compound having a functional group which is capable of reacting with a functional group (for example, a carboxyl, hydroxyl, amino, and sulfonate group etc.) of a water-soluble polymer, and there is no special limitation as far as it is. There are cited, for example, polyalcohols such as ethylene glycol, triethylene glycol, tetraethylene glycol, polyethylene glycol, glycerol, polyglycerol, propylene glycol, diethanolamine, triethanolamine, polyoxypropylene, oxyethyleneoxypropylene block copolymer, pentaerythritol, sorbitol, sorbitane fatty acid esters etc.; polyvalent glycidyl compounds such as ethylene glycol diglycidyl ether, polyethylene glycol diglycidyl ether, glycerol polyglycidyl ether, diglycerol polyglycidyl ether, polyglycerol polyglycidyl ether, sorbitol polyglycidyl ether, pentaerythritol polyglycidyl ether, propylene glycol diglycidyl ether, polypropylene glycol diglycidyl ether, resorcinol diglycidyl ether, 1,6-hexanediol diglycidyl ether, adipic acid diglycidyl ester, and o-phthalic acid diglycidyl ester etc.

In a case of that polyalcohol is used as a crosslinking agent, a crosslinked polymer which has a expected structure can be obtained by that when polymerization of a water-soluble polymer, a monomer which has a carboxyl group at a position which is apart by at least one carbon atom from a polymerizable double bond, for example, 2-methacryloyloxyethyl succinate, 2-methacryloyloxyethyl phthalate etc., is copolymerized, and then, esterification with polyalcohol being a crosslinking agent is carried out.

In a case of said combination (I), the obtained water-soluble polymer has a carboxyl group and/or a hydroxyl group. In a case of said combination (II), the obtained water-soluble polymer has a carboxyl group and/or a sulfonate group. In a case of said combination (III), the obtained water-soluble polymer has a carboxyl group and/or a sulfonate group and/or a hydroxyl group. In a case of said combination (IV), the obtained water-soluble polymer has a carboxyl group and/or a sulfonate group. In a case of said combination (V), the obtained water-soluble polymer has a carboxyl group and/or a sulfonate group and/or a hydroxyl group.



The amount for use of a crosslinking agent is preferable to use so as to be from 0.001 to 1.0 in a functional group molar ratio against a functional group (a carboxyl group and/or a hydroxyl group and/or a sulfonate group etc.) which said water-soluble polymer has (a functional group of the crosslinking agent / that of the water-soluble polymer), and more preferable 0.01 to 0.3. In a case of that the molar ratio is less  
 5 than said range, effect of preventing the slump loss may not be sufficient, the performance of a cement additive in the present invention may not be obtained, and if the molar ratio is more than said range, elevation of the performance may not be recognized or handling of the crosslinked polymer may be troubled.

To obtain a crosslinked polymer by the post-crosslinking method, for example, there is a method which  
 10 comprises a reaction of a water-soluble polymer with a crosslinking agent and the reversed phase suspension method in which a water-soluble polymer is suspended and dispersed in a hydrophobic organic solvent and subjected to a reaction with a crosslinking agent.

Temperature for the reaction of the water-soluble polymer with the crosslinking agent has no limitation as far as the reaction proceeds, but, for example, a range of 20 to 200 °C, especially 50 to 100 °C, is  
 15 preferred.

Although there is no special limitation for the viscosity of a 20 % aqueous solution or water dispersion of the crosslinked polymer which was obtained from a reaction of the water-soluble polymer with the crosslinking agent, the viscosity is preferred if it is  $100\text{Nsm}^{-2}$  (100,000cps) or less when measured by B-type rotational viscometer at 20 °C from a standpoint of production and handling.

To obtain a crosslinked polymer with the one-step crosslinking method, there is suggested a method in  
 20 which monomers is used in said combination from (VI) to (X) and a reaction is carried out under the manners or the conditions which have been mentioned in the production of the water-soluble polymers.

The crosslinked polymer may be used by itself as a principal component a cement additive and, in case of necessity, it may be neutralized by an alkaline substance and then, used as a main component of  
 25 the cement additive. As an alkaline substance of this kind are cited, as preferable, a hydroxide, chloride, and carbonate of a monovalent or divalent metal; ammonia; and an organic amine.

Also, it is possible for the crosslinked polymer to use in combination with other known-in-public cement additives. As a known cement additive of this kind are cited, for example, a hitherto known cement dispersing agent, air-entraining agents, cement wetting and dispersing agents, water-resisting agents,  
 30 strength-enhancing agents, and accelerators.

The cement additive in the present invention may be used for hydraulic cement such as portland cement, alumina cement, and various kinds of mixture cement, or a hydraulic material besides the cement such as gypsum etc.

As a method for use of the cement additive of the present invention are referred, for example, to a  
 35 method in which the additive is dissolved in water for mixing and kneading and then, is added during preparation of a cement composition together with the water for mixing and kneading, and to a method in which the additive is added to a cement composition that has been already kneaded up.

The amount of the cement additive is recommended to be from 0.005 to 2.5% against the cement in the cement composition as a weight % of a solid portion. If the amount is less than 0.005%, a property to  
 40 prevent a slump loss may not be achieved. Also, if it becomes such a large amount exceeding 2.5%, there may occur such a problem as an economical disadvantage or a coagulation delay and an excess of entrained air.

A mechanism of slump loss-prevention by the present invention may be assumed as follows. In general, a cement additive having a specially defined functional group is strongly adsorbed on cement particles and  
 45 thus, these particles are dispersed effectively into water. However, as the hydration reaction of cement further proceeds, a precipitating mineral which newly forms on the cement particles (ettringite etc.) adsorbs and accommodates the dispersing agent, the concentration of the cement additive in the solution decreases, and flocculation of the cement particles progresses. For prevention of this, the additive needs to be supplied by any means so that the cement additive concentration does not decrease in the system.

Thus, the present inventors carried out extensive research and, as a result, an additive was developed which, immediately after mixing and kneading in cement paste, shows only a weak adsorption ability for cement due to the molecular size of the crosslinked polymer and, with time passage, is going to be cut by  
 50 an outside action (for example, hydrolysis with an alkali) into molecules having an adsorption ability. Considering that the cement additive in the present invention is added into cement paste, an aqueous solution of a crosslinked polymer, that is a cement additive, is adjusted at pH 12 and stood with stirring at  
 55 room temperature. As a result, the gel permeation chromatography (GPC) which shows molecular weight distribution of the crosslinked polymer varies greatly as shown in comparison between Fig. 1 and Fig. 2 and among Figs. 3, 4, and 5.

Since the crosslinked polymer has the above specified bond between the main chains, the crosslinking bond is gradually cut in an alkaline medium. This is the reason why an ester bond in the above specified bond gradually undergoes hydrolysis by alkali. According to this dispersion of cement is maintained for a long time.


Besides, a crosslinking agent or monomer (e) is able to have said specified bond, and this is able to be formed by a reaction of the crosslinking agent with the water-soluble polymer in the post-crosslinking method. For example, in a case that between a crosslinking agent and a water-soluble polymer the one has a carboxyl group and the other has an epoxy group, the bond having a structure shown by said formula (I) is produced by a reaction of the crosslinking agent and water-soluble polymer.

On the other hand, since an ester bond which is directly bound to the main chain position and does not have a structure as shown by said formula (I) does not undergo cleavage in the above temperature range even in an alkali medium, to maintain the cement dispersion for a long time is difficult and the ability to prevent the slump loss is inferior.


However, even though an ester bond is directly bound to the main chain position, if a hydroxy group is bound to a carbon atom position which is separated by one carbon atom from the ester bond, a hydrophilic character and an effect favourable for a hydrolysis reaction is obtained due to the hydroxyl group and, as a result, the ability to prevent the slump loss is elevated. A structure of this kind is formed, for example, with a reaction of a carboxyl group with an epoxy group. The crosslinking agent and monomer (e) leading a structure of this kind are exemplified as follows.

As the crosslinking agent, are cited ethylene glycol diglycidyl ether, polyethylene glycol diglycidyl ether, glycerol polyglycidyl ether, diglycerol polyglycidyl ether, polyglycerol polyglycidyl ether, sorbitol polyglycidyl ether, pentaerythritol polyglycidyl ether, propylene glycol diglycidyl ether, polypropylene glycol diglycidyl ether, resorcinol diglycidyl ether etc.

As the monomer (e), are cited monomers having the following structure.

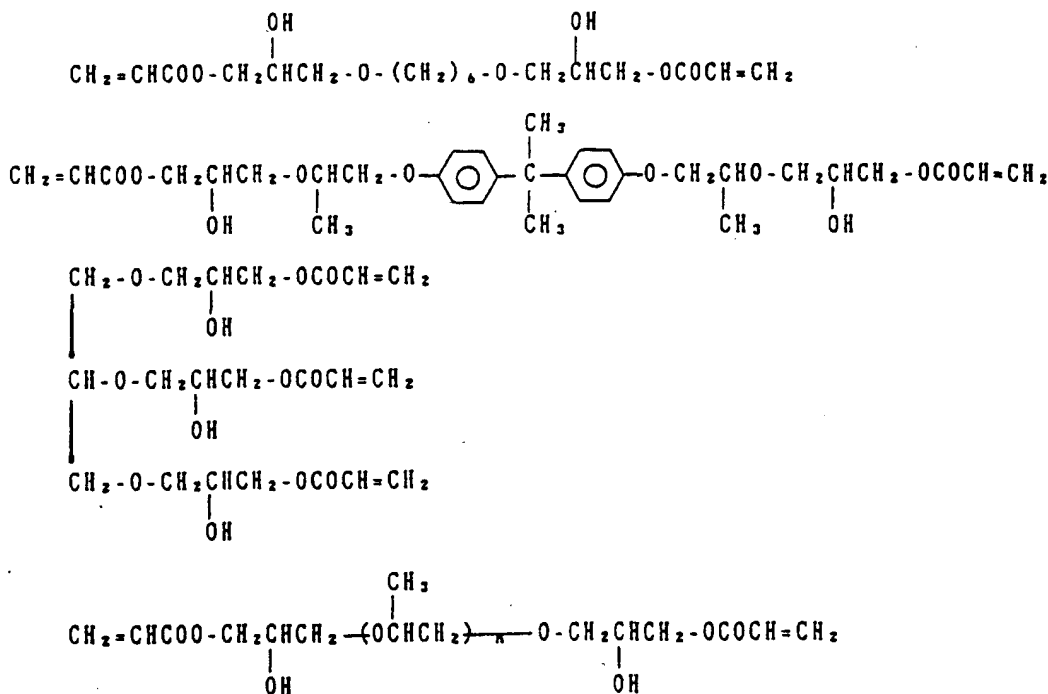

(Wherein n denotes 1, about 3, or about 11.)

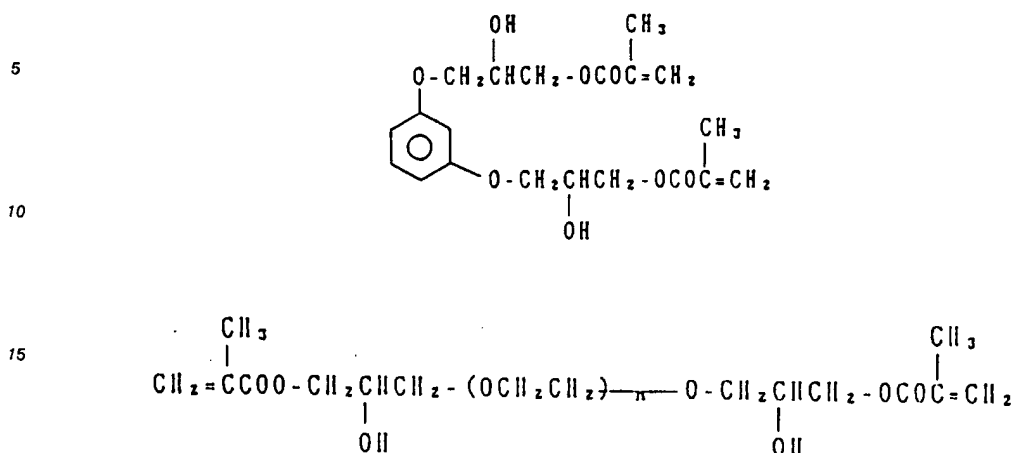

(Wherein n denotes 1, 2, or about 9.)

Besides for the cement additive in the present invention the crosslinked polymer may be dissolved or dispersed. Here, the word "dispersion" means that, for example, a microgel and so on which are by-produced during the production of the crosslinked polymer are dispersed in water. If the crosslinked polymer is, as above, dissolved or dispersed in water, it has an advantage of easy handling, the cement additive is used during preparation of the cement composition as a part or whole of the water for mixing and kneading. In addition, there does not take place such a problem as trouble in the dispersing stability (sedimentation etc.) which has often been observed in the hitherto-known cement additive.

In the case that said specific crosslinked polymer is dissolved or dispersed in water beforehand, the ratio of the crosslinked polymer to the water-soluble polymer may be optionally set and there is no special limitation.

The cement additive of the present invention is able to optionally control an extent of the ability to prevent the slump loss in a chemical sense by that the crosslinking agent or the monomer (e) is changed or the kind of crosslinking agents or the monomer (e) is changed and combined. This fact is a very superior point in view of that other kinds of additives which have aimed the preventing effect on the slump loss show difficulty or impossibility in controlling the ability to prevent the slump loss. For example, in a method of that a copolymer of olefin with an ethylenic unsaturated dicarboxylic acid anhydride gradually undergoes a hydrolysis reaction in a cement composition (Japanese Official Patent Provisional Publication, showa 60-16851), it is necessary to enlarge the particle diameter of the copolymer in order to maintain the ability to prevent the slump loss for a long period and thereby, there takes place sedimentation of particles in the additive. The crosslinked polymer in which a small amount of a crosslinking agent or the monomer (e) is contained is a liquid of relatively low viscosity and, therefore, it has a fundamentally good stability, while other kinds of additives which intend a preventive effect on the slump loss need to use a substance in a different phase with mixing and dispersing, so that these are of bad stability.

However, the cement additive of the present invention does not suffer any limitation by the above reason.

The cement additive of the present invention, as used in various cement compositions such as cement mortar and concrete etc., enables the composition to manifest high flowability without largely retarding their setting and prevent themselves from undergoing slump loss. Thus, it brings significant improvement in the workability when mortar work or concrete work being carried out.

Therefore, the cement additive in the present invention, of course, can be used effectively as an agent for imparting flowability to concrete, for example, ready-mixed concrete, and also its most characteristic point is that as an air-entraining high range water-reducing additive of simultaneous addition to plant, production of ready-mixed concrete having a composition of high ratio of water-reduction can be facilitated and flowability of the concrete can be maintained as constant. Furthermore, it can be used effectively as a high range water-reducing additive for producing a secondary concrete product.

Furthermore, as other examples, the additive is able to be effectively used, for example, for an assistant for grout of cement milk or mortar, and maintaining of flowing and prevention of material segregation etc. of

a cement composition placed by a tremie pipe, an under water concrete, a concrete for a continuous under ground wall etc.

The method for producing a cement additive of the present invention is easy in making a design for a structure of a crosslinked polymer or a water-soluble polymer in a case of that the post-crosslinking method is used, and is able to produce a crosslinked polymer in a relatively fewer processed when the one-step crosslinking method is used, compared to those in the post-crosslinking method.

Since the cement composition relating to the present invention contains said specially defined cement additive, it does not bring a slump loss without causing a strength decrease in a hardening product and, therefore, it is so stable irrespective of passage of time.

#### [BRIEF DESCRIPTION OF THE DRAWINGS]

Fig. 1 is a GPC eluding curve for a crosslinked polymer which was obtained from the example 1. Fig. 2 is a GPC eluding curve for an aqueous solution of the same crosslinked polymer which was adjusted to pH 12 by adding an aqueous sodium hydroxide solution and stirred at room temperature for 10 minutes. Fig. 3 is a GPC eluding curve for a copolymer which was obtained from the example 85. Fig. 4 is a GPC eluding curve for an aqueous solution of the same copolymer which was adjusted to pH 12 by adding an aqueous sodium hydroxide solution and stirred at room temperature for 30 minutes. Fig. 5 is a GPC eluding curve for an aqueous solution of the same copolymer which was adjusted to pH 12 by adding an aqueous sodium hydroxide solution and stirred at room temperature for 120 minutes.

The following Trade Marks have been used in this Application and are acknowledged as such: DESMOPHEN, SANNIX, NISSO-PB, POLYBD, KAYARAD MANDA, DENACOL, BLENMER, NK-ESTER M-9G, NK-ESTER m23G, TSK gel, VINSOL and KAYARAD.

#### [BEST MODE FOR CARRYING OUT THE INVENTION]

Next, the cement additive, the method for producing the same, and the cement composition of the present invention are explained in more detail with the following examples, but the present invention is not limited within these examples. Besides, unless otherwise specially stated, the % indicates a weight % and the part indicates a weight part. Hereinafter, a crosslinked polymer is referred to as a hydrophilic resin or a copolymer.

##### Example 1

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, dropping funnels, and a gas-inlet tube, and a reflux condenser were placed 164.2 parts of water, the inside atmosphere of the flask was replaced with stirring by nitrogen gas, and the flask was warmed to the boiling point under a nitrogen atmosphere. Then, to this were added a mixture solution composed of 62.9 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 16.7 parts of methacrylic acid, and 125.5 parts of water and, in addition, 24.6 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours. After the addition finished, furthermore, 6.1 parts of 2.5 % aqueous ammonium persulfate solution were added during 1 hour. After the addition completed, the mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (1) was obtained. Then, to this polymer were added 3.2 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction. Then, the reaction mixture was completely neutralized with an aqueous sodium hydroxide, whereby a hydrophilic resin (1) was obtained.

##### Example 2

The procedure of example 1 was repeated except that parts of o-phthalic acid diglycidyl ester, which is a polyfunctional compound, was 1.6 parts, whereby a hydrophilic resin (2) was obtained.

##### Example 3

The procedure of example 1 was repeated except that 11.4 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-861", made by NAGASE CHEMICALS Co., Ltd.; an average mole number of added

ethylene oxide is about 22) were added instead of the o-phthalic acid diglycidyl ester, whereby a hydrophilic resin (3) was obtained.

#### Example 4

5

The procedure of the example 1 was repeated except that 3.2 parts of adipic acid diglycidyl ester ("DENACOL EX-701", made by NAGASE CHEMICALS Co., Ltd.) were added instead of the o-phthalic acid diglycidyl ester, whereby a hydrophilic resin (4) was obtained.

#### 10 Example 5

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 17.6 parts of 2-hydroxyethyl methacrylate (hereinafter referred to as HEMA), 14.4 parts of methacrylic acid, 1.0 part of benzoyl peroxide (hereinafter referred to as BPO), and 127 parts of isopropyl alcohol (hereinafter referred to as IPA) and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point. Next, to this flask was added during 2 hours a mixture solution composed of 20.9 parts of HEMA, 17.1 parts of methacrylic acid, 1.1 parts of BPO, and 150.9 parts of IPA and, after those addition finished, were further added during 1 hour 10.7 parts of a 7 % IPA solution of BPO. After this addition finished, the mixture was further maintained at the boiling point for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (2) was obtained. Next, to this were added 6.0 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution and treated with distillation to remove IPA, whereby a hydrophilic resin (5) was obtained.

25

#### Example 6

The procedure of example 5 was repeated except that 21.5 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-861", made by NAGASE CHEMICALS Co., Ltd.; an average mole number of added ethylene oxide is about 22) was added instead of o-phthalic acid diglycidyl ester, whereby a hydrophilic resin (6) was obtained.

30

#### Example 7

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 164.2 parts of water and the inside atmosphere of the flask was replaced with stirring with nitrogen gas and the flask was warmed up to the boiling point under a nitrogen atmosphere. Next, to this were added a mixture solution composed of 62.9 parts of polyethylene glycol polypropylene glycol methacrylate ("Blenmer 70PEP-350B", made by NIPPON OIL & FATS Co., Ltd.; an average mole number of added ethylene oxide is 7 and an average mole number of added propylene oxide is 3), 16.7 parts of methacrylic acid, and 125.5 parts of water, with 24.6 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, 6.1 parts of a 2.5 % aqueous ammonium persulfate solution were further added during 1 hour. After the addition finished, the mixture was further maintained at the boiling point for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (3) was obtained. Next, to this were added 12.8 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) the mixture was maintained at the boiling point for 3 hours to complete a crosslinking reaction, whereby a hydrophilic resin (7) was obtained.

45

#### Example 8

50

The procedure of example 7 was repeated except that 0.64 parts of o-phthalic acid diglycidyl ester of a polyfunctional type compound was used, whereby a hydrophilic resin (8) was obtained.

#### Example 9

55

The procedure of example 7 was repeated except that 11.4 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-861", made by NAGASE CHEMICALS Co., Ltd.; an average mole number of added ethylene oxide is about 22) was added instead of the o-phthalic acid diglycidyl ester used in the example 7,

whereby a hydrophilic resin (9) was obtained.

#### Example 10

5 Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 460.7 parts of water and the inside atmosphere of the flask was replaced with stirring with nitrogen gas and the flask was warmed up to 50 °C under the nitrogen atmosphere. In this flask was added a mixture solution composed of 191.2 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-23G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average  
10 mole number of added ethylene oxide is 23), 8.0 parts of methacrylic acid, 8.7 parts of a 16.5 % aqueous sodium hydroxide solution, and 304.9 parts of water and furthermore, were added 11.8 parts of a 15 % aqueous ammonium persulfate solution and 5.9 parts of a 15 % aqueous sodium hydrogen sulfite solution during 2 hours and, after the addition finished, were further added 5.9 parts of a 15 % aqueous ammonium persulfate solution and 2.9 parts of a 15 % aqueous sodium hydrogen sulfite solution during 1 hour. After  
15 the addition finished, the reaction mixture was kept at 50 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (4) was obtained. To this were added 13.8 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (10) was obtained.

20

#### Example 11

The procedure of example 10 was repeated except that 27.3 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-861", made by NAGASE CHEMICALS Co., Ltd.; an average mole number of added  
25 ethylene oxide is about 22) was added instead of the o-phthalic acid diglycidyl ester used in the example 10, whereby a hydrophilic resin (11) was obtained.

#### Example 12

30 Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 216.2 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 90 °C under the nitrogen atmosphere. To this was added a mixture solution composed of 20.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole  
35 number of added ethylene oxide is 9), 86.2 parts of methacrylic acid, 72.1 parts of sodium methacrylate, and 278.9 parts of water, and furthermore, were added 137.0 parts of a 15 % aqueous ammonium persulfate solution and 58.0 parts of a 15 % aqueous sodium hydrogen sulfite solution during 4 hours and, after the addition finished, were added 34.3 parts of a 15 % aqueous ammonium persulfate solution and 27.3 parts of a 15 % aqueous sodium hydrogen sulfite solution during 1 hour. After the addition finished,  
40 the mixture was further maintained at 90 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (5) was obtained. Next, to this were added 14.1 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (12) was obtained.

45

#### Example 13

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 568.7 parts of water and the inside atmosphere of the flask was  
50 replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. To this was added a mixture solution composed of 40.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 127.4 parts of methacrylic acid, and 261.8 parts of water, and furthermore, were added 156.6 parts of a 2.5 % aqueous sodium persulfate solution during 4 hours and,  
55 after the addition finished, the mixture was further maintained at the boiling point for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (6) was obtained. Next, to this were added 7.33 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then,

completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (13) was obtained.

#### Example 14


5 Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 176.4 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. To this was added a mixture solution composed of 62.9 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 16.7 parts of methacrylic acid, and 125.5 parts of water, and 14.8 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, were added 3.7 parts of a 2.5 % aqueous ammonium persulfate solution during 1 hour. After the addition finished, the mixture was further maintained at the boiling point for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (7) was obtained. Next, to this were added 0.64 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (14) was obtained.

#### 20 Example 15

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 164.2 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. To this was added a mixture solution composed of 62.9 parts of methoxypolyethylene glycol monomethacrylate (an average mole number of added ethylene oxide is 10), 16.7 parts of acrylic acid, and 125.5 parts of water, and 24.6 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, were added 6.1 parts of a 2.5 % aqueous ammonium persulfate solution during 1 hour. After the addition finished, the mixture was further maintained at the boiling point for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (8) was obtained. Next, to this were added 3.2 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (15) was obtained.

#### 35 Example 16

The procedure of example 1 was repeated except that 3.2 parts of a compound having the following structure ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) were added instead of the o-phthalic acid diglycidyl ester used in the example 1, whereby a hydrophilic resin (16) was obtained.

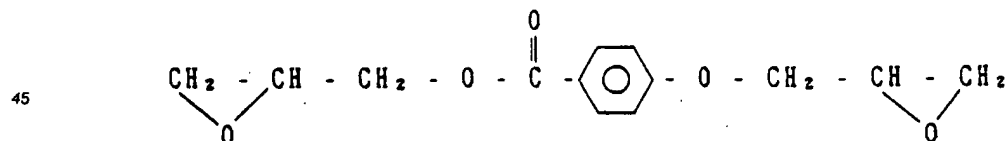

#### 50 Example 17

The procedure of example 1 was repeated except that 3.2 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-841", made by NAGASE CHEMICALS Co., Ltd.; an average mole number of added ethylene oxide is about 13) were added instead of the o-phthalic acid diglycidyl ester used in the example 1, whereby a hydrophilic resin (17) was obtained.

## Example 18

The procedure of example 1 was repeated except that 3.2 parts of sorbitol polyglycidyl ether ("DENACOL EX-611", made by NAGASE CHEMICALS Co., Ltd.) were added instead of the o-phthalic acid diglycidyl ester used in the example 1, whereby a hydrophilic resin (18) was obtained.

The average molecular weights (weight average) of the water-soluble polymers above-obtained were determined by GPC and shown in Table 1. The conditions of GPC are as follows;

Column: TOSOH TSK gel G4000SW + G3000SW + G2000SW;  
 Eluent: [0.05M-CH<sub>3</sub>COONa aqueous solution (adjusted to pH 6.0 by CH<sub>3</sub>COOH)] / acetonitrile = 59 / 41 (vol. %);  
 Temperature: 40 °C;  
 Flow rate: 0.5 ml/min.;  
 Standard compound: polyethylene glycol.

Also, viscosity of the hydrophilic resins above-obtained was measured with a B-type rotational viscometer (VG-A1 type, made by SEIKI KOGYO RESEARCH Co., Ltd.), and results obtained are shown in the Table 1. The viscosity measurement was carried out about prepared 20 % aqueous solutions or dispersions of the hydrophilic resins at a temperature of 20 °C with a rotation number of 60 r.p.m. in case that the viscosity of the resin solutions or dispersions was 10 Nsm<sup>-2</sup> (10,000 cps) or less, or with a rotation number of 6 r.p.m. in case that the viscosity was 10 to 100 Nsm<sup>-2</sup> (10,000 or 100,000 cps).

## Example 19

Ordinary portland cement (made by Sumitomo Cement Co., Ltd.) was used as cement, river sand taken from Yodogawa as a fine aggregate (specific gravity of 2.51 and a fineness modulus [F. M.] of 2.78), crushed stones from Takatsuki as a coarse aggregate (specific gravity of 2.68 and a fineness modulus [F. M.] of 6.73), and the hydrophilic resin (1) obtained in the example 1 as a cement additive, and these materials were respectively weighted to make 30 l in amount of a kneaded mixture with a composition of a unit ratio of 320 kg/m<sup>3</sup> for cement, a unit ratio of 173 kg/m<sup>3</sup> for water (a ratio of water to cement, 54.2 %), a unit ratio of 934 kg/m<sup>3</sup> for fine aggregate, a unit ratio of 876 kg/m<sup>3</sup> for coarse aggregate (a fine aggregate percentage of 52 %), and an addition amount 0.12 % of the hydrophilic resin (1) obtained from the example 1 (a ratio of the solid portion against cement), and then all the materials were placed into a tilting mixer. Immediately, the mixing and kneading were carried out for 3 minutes with 35 r.p.m. of a rotation number, whereby a fluid concrete having an object slump 18 cm and an object air amount 4.5 % was prepared (in a case of that the object air amount is not attained, a slight amount of an air-entraining agent [Vinsol], made by Yamaso Chemical Co., Ltd. was used). A fluid concrete immediately after the mixing and kneading was sampled and the slump and air amount were measured.

After the mixing and kneading, the rotation number of the tilting mixture was reduced to 3 r.p.m. and the mixing and kneading was further continued and then, after 60 minutes, 90 minutes, and 120 minutes, the slump and air amount were measured to investigate their changes with time-passage.

Also, the condensation strength and setting time of the flowing concrete obtained were measured. These measurement results are presented in Table 1.

Besides, the measurement methods for the slump, air amount, compressive strength, and setting time, and the method to take a sample for testing the compressive strength are based on the Japanese Industrial Standards (JIS A6204).

## Examples 20 to 36

The procedure of example 19 were repeated except that the hydrophilic resins (2) to (18) obtained from the examples 2 to 18 are used as cement additives in the amounts shown in Table 1, and flowing concretes thus-prepared were measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 1.

## Example for comparison 1

The procedure of example 19 was repeated except that a commercially-available sodium naphthalenesulfonateformalin condensation product was used in an addition amount of 0.35 % (against cement) as a cement additive instead of the hydrophilic resin (1), and a flowing concrete for comparison thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results obtained



are shown in Table 1.

#### Example for comparison 2

5        The procedure of example 19 was repeated except that commercially-available sodium ligninsulfonate was used in an addition amount of 0.35 % (against cement) as a cement additive instead of the hydrophilic resin (1), and a flowing concrete for comparison thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 1.

#### 10    Example for comparison 3

      The procedure of example 19 was repeated except that the water-soluble polymer (1) obtained from the example 1 was used in an addition amount of 0.12 % (against cement) as a cement additive instead of the hydrophilic resin (1), and a flowing concrete for comparison thus-prepared was measured in the slump, air  
15    amount, compressive strength, and setting time. Results obtained are shown in Table 1.

#### Example for comparison 4

      The procedure of example 19 was repeated except that a commercially-available sodium naphthalenesulfonateformalin condensation product and a water-highly absorbent resin (a crosslinked product of  
20    partially neutralized polyacrylic acid) was used in addition amounts of 0.35 % and 0.1 % (against cement), respectively, as cement additives instead of the hydrophilic resin (1), and a flowing concrete for comparison thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results  
25    obtained are shown in Table 1.

30

35

40

45

50

55

Table 1 (Part 1/3)

	Water-soluble polymer		Cement admixture used			The upper side: Slump (cm) The middle side: Air amount (%) The under side: Residual % of slump (*3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	N o.	Molecular weight (*1)	Viscosity 1×10 <sup>3</sup> Nsm <sup>2</sup> (*2)	Addition amount (solid portion, %) (against cement)	after kneading						
					Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes			
Example 19	(1)	20. 000	Hydrophilic resin (1)	3. 500	0.12	17.7 4.9 —	19.3 5.2 10.9	18.5 5.1 10.5	17.8 4.8 10.1	352	5:25/7:18
Example 20	(1)	20. 000	Hydrophilic resin (2)	30	0.12	18.7 4.3 —	18.5 4.6 9.9	18.3 4.3 9.8	17.6 4.0 9.4	340	5:17/7:08
Example 21	(1)	20. 000	Hydrophilic resin (3)	1. 010	0.12	18.0 4.8 —	17.0 4.9 9.4	15.8 5.0 8.8	12.3 4.8 6.8	360	5:10/7:11
Example 22	(1)	20. 000	Hydrophilic resin (4)	3. 000	0.12	18.4 4.6 —	18.9 4.9 10.3	18.0 5.0 9.8	17.2 4.7 9.3	325	5:23/7:10
Example 23	(2)	23. 000	Hydrophilic resin (5)	2. 800	0.18	18.3 4.1 —	17.7 4.3 9.7	17.5 4.3 9.6	17.1 4.0 9.3	320	5:05/7:03
Example 24	(2)	23. 000	Hydrophilic resin (6)	120	0.18	17.8 4.6 —	16.6 4.9 9.3	15.0 4.6 8.4	11.8 6.6 6.6	328	5:17/7:20
Example 25	(3)	18. 000	Hydrophilic resin (7)	82	0.14	17.3 4.8 —	20.2 4.9 11.7	19.8 5.0 11.4	18.8 4.7 10.9	365	5:36/7:29
Example 26	(3)	18. 000	Hydrophilic resin (8)	30	0.10	18.8 4.8 —	17.0 5.2 9.0	16.8 5.2 8.9	16.6 5.0 8.8	332	5:18/7:21

Table 1 (Part 2/3)

	Water-soluble polymer		Cement admixture used				The upper side: Slump (cm) The middle side: Air amount (%) The under side: Residual % of slump (* 3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	No.	Molecular weight (* 1)	Viscosity 1x10 <sup>3</sup> Nsm <sup>-2</sup> (*2)	Addition amount (solid portion, %) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes				
Example 27	(3)	18. 000	Hydrophillic resin (9)	0.12	39	18.5 4.9	17.3 5.3 9.4	15.4 5.1 8.3	11.2 4.8 6.1	315	5:27/7:13	
Example 28	(4)	26. 000	Hydrophillic resin (10)	0.20	76	17.5 4.0	18.3 4.3 10.5	18.0 4.5 10.3	17.3 4.2 9.9	310	5:10/7:07	
Example 29	(4)	26. 000	Hydrophillic resin (11)	0.20	46	18.3 4.5	17.1 4.9 9.3	14.9 4.7 8.1	10.8 4.4 5.9	327	5:40/7:28	
Example 30	(5)	15. 000	Hydrophillic resin (12)	0.30	33	17.4 3.8	18.0 3.5 10.3	17.8 3.6 10.2	17.2 3.4 9.9	310	6:10/8:05	
Example 31	(6)	18. 000	Hydrophillic resin (13)	0.15	180	19.0 5.3	17.0 4.8 8.9	17.2 4.9 9.1	17.0 4.3 8.9	323	5:13/7:13	
Example 32	(7)	87. 000	Hydrophillic resin (14)	0.16	2. 600	18.2 4.1	18.4 4.7 10.1	18.0 4.8 9.9	17.2 4.6 9.5	330	5:08/7:18	
Example 33	(8)	18. 000	Hydrophillic resin (15)	0.12	3. 500	18.3 4.8	17.9 5.2 9.8	17.5 4.9 9.6	17.1 4.6 9.3	340	5:15/7:23	
Example 34	(1)	20. 000	Hydrophillic resin (16)	0.25	6. 000	5.0 3.2	18.0 5.9 36.0	19.5 5.9 39.0	18.3 5.8 36.6	343	5:52/7:49	

Table 1 (Part 3/3)

	Water-soluble polymer		Cement admixture used				The upper side: Slump (cm) The middle side: Air amount (%) The under side: Residual % of slump (* 3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	No.	Molecular weight (* 1)	Viscosity 1x10 <sup>3</sup> Nm <sup>-2</sup> (* 2)	Addition amount (solid portion, %) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes				
Example 35	(1)	20.000	4.000	0.40	18.0 4.1	17.5 4.3 9.7	16.1 4.5 8.9	12.7 4.0 7.1	329	5:30/7:28		
Example 36	(1)	20.000	4.800	0.12	18.2 4.8	16.8 4.9 9.2	14.2 4.6 7.8	10.4 4.2 5.7	338	5:24/7:19		
Example for comparison 1	—	—	—	0.35	18.6 4.3	8.3 4.0 4.5	— — —	— — —	321	5:13/7:01		
Example for comparison 2	—	—	—	0.35	18.8 5.2	9.8 5.6 5.2	— — —	— — —	334	5:24/7:18		
Example for comparison 3	—	—	—	0.12	18.3 4.4	13.3 4.8 7.3	— — —	— — —	320	5:21/7:31		
Example for comparison 4	—	—	—	0.35 0.10	17.4 5.3	10.4 6.0 6.0	— — —	— — —	313	7:10/9:45		

(\*) 1) Measured by G.P.C.

(\*) 2) Measured by a B type rotational viscometer at 20 °C and 20 %

(\*) 3) Residual percentage of slump (%) = slump after 60 min. or 90 min. or 120 min. / × 100

(\*) 4) NSF : Sodium naphthalenesulfonate-formalin condensation product

(\*) 5) LS : Sodium ligninsulfonate

(\*) 6) a partially neutralized crosslinked product of polyacrylic acid

## Example 37

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 147.4 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 90 °C under the nitrogen

atmosphere. To this were added a mixture solution composed of 48.0 parts of methacrylic acid and 75.1 parts of water, a mixture solution composed of 32.0 parts of 2-acrylamido-2-methylpropanesulfonic acid and 50.1 parts of water, and 31.6 parts of a 15 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, were added 15.8 parts of a 15 % aqueous ammonium persulfate solution during 1 hour. After the addition finished, the mixture was further maintained at 90 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (37) was obtained. Next, to this were added 46.2 parts of water and 5.63 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (37) was obtained.

#### Example 38

The procedure of example 37 was repeated except that 20.8 parts of o-phthalic acid diglycidyl ester for the crosslinking agent were used, whereby a hydrophilic resin (38) was obtained.

#### Example 39

The procedure of example 37 was repeated except that 6.00 parts of adipic acid diglycidyl ester ("DENACOL EX-701", made by NAGASE CHEMICALS Co., Ltd.) were added instead of the o-phthalic acid diglycidyl ester used in the example 37, whereby a hydrophilic resin (39) was obtained.

#### Example 40

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 147.4 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 90 °C under the nitrogen atmosphere. To this were added a mixture solution composed of 48.0 parts of methacrylic acid and 75.1 parts of water, a mixture solution composed of 32.0 parts of 2-acrylamido-2-methylpropanesulfonic acid and 50.1 parts of water, and 31.7 parts of a 30.0 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, 15.8 parts of a 30.0 % aqueous ammonium persulfate solution during 1 hour. After the addition finished, the mixture was further maintained at 90 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (38) was obtained. Next, to this were added 2.24 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (40) was obtained.

#### Example 41

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 147.4 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 90 °C under the nitrogen atmosphere. To this were added a mixture solution composed of 48.0 parts of methacrylic acid and 75.1 parts of water, a mixture solution composed of 32.0 parts of 2-acrylamido-2-methylpropanesulfonic acid and 50.1 parts of water, and 31.6 parts of a 7.5 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, 15.8 parts of a 7.5 % aqueous ammonium persulfate solution during 1 hour. After the addition finished, the mixture was further maintained at 90 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (39) was obtained. Next, to this were added 1.88 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (41) was obtained.

#### Example 42

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 614.4 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 90 °C under the nitrogen

atmosphere. To this were added a mixture solution composed of 324.0 parts of methacrylic acid and 506.8 parts of water, a mixture solution composed of 36.0 parts of 2-acrylamido-2-methylpropanesulfonic acid and 56.3 parts of water, and 175.0 parts of a 15 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, were further added 87.5 parts of a 15 % aqueous ammonium persulfate solution during 1 hour. After the addition finished, the mixture was further maintained at 90 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (40) was obtained. Next, to this were added 62.5 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (42) was obtained.

#### Example 43

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed a mixture composed of 14.4 parts of 2-hydroxyethyl methacrylate, 3.2 parts of 2-acrylamido-2-methylpropanesulfonic acid, 14.4 parts of methacrylic acid, 0.96 parts of BPO, and 127.0 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the mixture was warmed up to the boiling point. Next, to this flask was added during 2 hours a mixture composed of 17.1 parts of 2-hydroxyethyl methacrylate, 3.8 parts of 2-acrylamido-2-methylpropanesulfonic acid, 17.1 parts of methacrylic acid, 1.14 parts of BPO, and 150.9 parts of IPA and, after those addition finished, were added during 1 hour a mixture composed of 0.70 parts of BPO and 10.0 parts of IPA. After this addition finished, the mixture was furthermore maintained at the boiling point for 1 hour to complete a polymerization reaction, and then partially neutralized with an aqueous sodium hydroxide solution and treated with distillation to remove IPA, whereby a water-soluble polymer (41) was obtained. Next, 380.0 parts of an aqueous solution of the water-soluble polymer (41) whose concentration was adjusted at 20 % and 3.10 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) were added and maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (43) was obtained.

#### Example 44

The procedure of example 43 was repeated except that 2.50 parts of ethylene glycol diglycidyl ether ("DENACOL EX-810", made by NAGASE CHEMICALS Co., Ltd.) were added instead of o-phthalic acid diglycidyl ester in the example 43, whereby a hydrophilic resin (44) was obtained.

#### Example 45

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed a mixture composed of 14.4 parts of 2-hydroxyethyl methacrylate, 3.2 parts of 2-acrylamido-2-methylpropanesulfonic acid, 14.4 parts of methacrylic acid, 1.14 parts of BPO, and 127.0 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the mixture was warmed up to the boiling point. Next, to this flask was added during 2 hours a mixture composed of 17.1 parts of 2-hydroxyethyl methacrylate, 3.8 parts of 2-acrylamido-2-methylpropanesulfonic acid, 17.1 parts of methacrylic acid, 1.36 parts of BPO, and 150.9 parts of IPA and, after those addition finished, were added during 1 hour a mixture composed of 0.83 parts of BPO and 10.0 parts of IPA. After this addition finished, the mixture was furthermore maintained at the boiling point for 1 hour to complete a polymerization reaction, and then partially neutralized with an aqueous sodium hydroxide solution and treated with distillation to remove IPA, whereby a water-soluble polymer (42) was obtained. Next, 380.0 parts of an aqueous solution of the water-soluble polymer whose concentration was adjusted at 20 % and 3.10 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) were added and maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (45) was obtained.

## Example 46

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 147.4 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 90 °C under the nitrogen atmosphere. To this were added a mixture solution composed of 32.0 parts of 2-acrylamido-2-methylpropanesulfonic acid and 50.1 parts of water, a mixture solution composed of 48.0 parts of acrylic acid and 75.1 parts of water, and 31.6 parts of a 15 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, were further added 15.8 parts of a 15 % aqueous ammonium persulfate solution during 1 hour. After completion of the addition, the mixture was further maintained at 90 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (43) was obtained. Next, to this were added 46.2 parts of water and 5.63 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (46) was obtained.

## Example 47

The procedure of example 46 was repeated except that 5.02 parts of adipic acid diglycidyl ester ("DENACOL EX-701", made by NAGASE CHEMICALS Co., Ltd.) were added instead of o-phthalic acid diglycidyl ester used in the example 46, whereby a hydrophilic resin (47) was obtained.

## Example 48

The procedure of example 37 was repeated except that 5.6 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-841", made by NAGASE CHEMICALS Co., Ltd.; an average mole number of added ethylene oxide is about 13) were added instead of o-phthalic acid diglycidyl ester used in the example 37, whereby a hydrophilic resin (48) was obtained.

## Example 49

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 164.2 parts of water and the inside atmosphere of the flask was replaced with stirring with nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. In this flask were added a mixture solution composed of 52.9 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 10.0 parts of 2-acrylamido-2-methylpropanesulfonic acid, 16.7 parts of methacrylic acid, and 125.5 parts of water, and 24.6 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, were further added 6.1 parts of a 2.5 % aqueous ammonium persulfate solution during 1 hour. After completion of the addition, the reaction mixture was further maintained at the boiling point for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (44) was obtained. To this were added 3.2 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (49) was obtained.

The average molecular weights (weight average) of the above-obtained water-soluble polymers were measured by GPC under said condition and results obtained are shown in the Table 2.

Also, viscosity of the above-obtained hydrophilic resins were measured in said way and results obtained are shown in the Table 2.

## Example 50

Ordinary portland cement (made by Sumitomo Cement Co., Ltd.) was used as cement, river sand taken from Yodogawa as a fine aggregate (specific gravity of 2.51 and a fineness modulus [F. M.] of 2.78), crashed stone from Takatsuki as a coarse aggregate (specific gravity of 2.68 and a fineness modulus [F. M.] of 6.73), and the hydrophilic resin (37) obtained in the example 37 as a cement additive, and these materials were respectively weighted to make 30 l in amount of a kneaded mixture with a composition of a unit ratio of 320 kg/m<sup>3</sup> for cement, a unit ratio of 173 kg/m<sup>3</sup> for water (a ratio of water to cement, 54.2 %), a

unit ratio of 934 kg/m<sup>3</sup> for fine aggregate, a unit ratio of 876 kg/m<sup>3</sup> for coarse aggregate (a fine aggregate percentage of 52 %), and an addition amount 0.23 % of the hydrophilic resin (37) (a solid portion ratio against the cement), and then all the materials were placed into a tilting mixer. Immediately, the mixing and kneading were carried out for 3 minutes with 35 r.p.m. of a rotation number, whereby a flowing concrete  
 5 having an object slump 18 cm and an object air amount 4.5% was prepared (in a case of that the object air amount is not attained, a slight amount of an air-entraining agent [Vinsol], made by Yamaso Chemical Co., Ltd. was used). A flowing concrete immediately after the mixing and kneading was sampled and the slump and air amount were measured.

After the mixing and kneading, the rotation number of the tilting mixture was reduced to 3 r.p.m. and the  
 10 mixing and kneading was further continued and then, after 60 minutes, 90 minutes, and 120 minutes, the slump and air amount were measured to investigate their changes with time-passage.

Also, the compressive strength and setting time of the flowing concrete obtained were measured. These measurement results are presented in Table 2.

Besides, the measurement methods for the slump, air amount, compressive strength, and setting time,  
 15 and the method to take samples for testing the compressive strength are based on the JIS A6204 (Japanese Industrial Standard).

#### Examples 51 to 62

20 The procedure of example 50 was repeated except that the hydrophilic resins (38) to (49) obtained from the examples 38 to 49 are used as cement additives in the amounts shown in Table 2, and the flowing concretes thus-prepared were measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 2.

#### 25 Example for comparison 5

The procedure of example 50 was repeated except that the water-soluble polymer (37) obtained from the example 37 was used in an addition amount of 0.32 % (against cement) as a cement additive instead of the hydrophilic resin (37), and a flowing concrete for comparison thus-prepared was measured in the slump,  
 30 air amount, compressive strength, and setting time. Results obtained are shown in Table 2.

35

40

45

50

55



Table 2 (Part 1/2)

	Water-soluble polymer		Cement admixture used			The upper side: Slump (cm) The middle side: Air amount (X) The under side: Residual % of slump (* 3)					Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	N o.	Molecular weight (* 1)	Viscosity 1x10 <sup>3</sup> Nsm <sup>-2</sup> (*2)	Addition amount (solid portion, X) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes				
Example 5 0	(37)	15. 0 0 0	Hydrophilic resin (37)	0.23	30.5	18.2 4.3	16.9 4.5 93	16.5 4.6 91	16.2 4.4 89	358	5 : 41 / 7 : 38	
Example 5 1	(37)	15. 0 0 0	Hydrophilic resin (38)	0.24	2. 79 0	17.8 5.0	18.0 4.6 101	18.2 4.8 102	17.6 4.6 99	363	5 : 08 / 7 : 12	
Example 5 2	(37)	15. 0 0 0	Hydrophilic resin (39)	0.23	35.0	18.6 4.8	19.0 5.0 102	18.8 5.1 101	17.8 4.6 96	340	5 : 19 / 7 : 20	
Example 5 3	(38)	6. 6 0 0	Hydrophilic resin (40)	0.18	14.3	18.4 4.8	18.3 5.0 99	17.8 5.0 97	17.2 4.5 93	330	5 : 19 / 7 : 21	
Example 5 4	(39)	52. 0 0 0	Hydrophilic resin (41)	0.25	1. 20 0	17.3 3.8	18.2 4.2 105	18.0 4.5 104	17.3 4.2 100	324	5 : 41 / 7 : 33	
Example 5 5	(40)	8. 0 0 0	Hydrophilic resin (42)	0.33	7. 80 0	19.4 5.2	18.0 4.3 93	17.5 4.3 90	17.0 4.1 88	318	6 : 05 / 7 : 53	
Example 5 6	(41)	12. 0 0 0	Hydrophilic resin (43)	0.20	18.7	18.3 5.4	18.9 5.0 103	18.5 5.2 101	17.8 4.6 97	334	5 : 27 / 7 : 27	
Example 5 7	(41)	12. 0 0 0	Hydrophilic resin (44)	0.20	17.2	18.6 4.7	17.9 4.5 96	15.1 4.3 81	11.5 4.1 62	325	5 : 30 / 7 : 23	

Table 2 (Part 2/2)

	Water-soluble polymer		Cement admixture used			Slump (cm)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	No.	Molecular weight (*1)	Viscosity (x10 <sup>3</sup> Nm <sup>-2</sup> )	Addition amount (solid portion, %)		The upper side: The middle side: The under side: immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes		
Example 58	(42)	6,000	13.1	0.18	Hydrophilic resin (45)	18.0 4.5	17.5 4.9 97	17.3 5.0 96	17.1 4.6 95	320	5:20/7:15
Example 59	(43)	17,000	34.2	0.21	Hydrophilic resin (46)	19.0 4.2	17.2 4.5 91	17.5 4.7 92	17.0 4.3 89	329	5:30/7:13
Example 60	(43)	17,000	33.8	0.21	Hydrophilic resin (47)	18.5 4.3	17.9 4.4 97	17.6 4.7 95	17.2 4.1 93	335	5:15/7:11
Example 61	(37)	15,000	35.4	0.35	Hydrophilic resin (48)	17.8 4.1	17.2 4.1 97	14.8 3.8 83	12.1 3.7 68	321	5:30/7:19
Example 62	(44)	18,000	3.400	0.12	Hydrophilic resin (49)	17.2 4.0	16.8 4.2 98	16.6 4.5 97	16.0 4.3 93	334	5:28/7:34
Example for comparison 5	—	—	—	0.32	Water-soluble polymer (37)	18.9 3.8	7.0 3.9 37	— — —	— — —	303	6:53/9:05

(\*1) Measured by G.P.C.

(\*2) Measured by a B type rotational viscometer at 20 °C and 20 X

(\*3) Residual percentage of slump (%) =  $\frac{\text{slump after 60 min. (90 min. or 120 min.)}}{\text{slump immediately after kneading}} \times 100$ 

## Example 63

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 37.2 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen

atmosphere. To this were added a mixture solution composed of 5 parts of sodium 2-sulfoethyl methacrylate, 15 parts of acrylic acid, and 30 parts of water, and 8.5 parts of a 5 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, were further added 4.3 parts of a 5 % aqueous ammonium persulfate solution during 1 hour. After completion of the addition, the mixture was further maintained at 95 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (63) having an average molecular weight of 5200 was obtained.

Next, to this were added 1.0 part of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (63) was obtained.

#### Example 64

The procedure of example 63 was repeated except that 1.0 part of adipic acid diglycidyl ester ("DENACOL EX-701", made by NAGASE CHEMICALS Co., Ltd.) was added instead of o-phthalic acid diglycidyl ester used in the example 63, whereby a hydrophilic resin (64) was obtained.

#### Example 65

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 39.3 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. To this were added a mixture solution composed of 10 parts of sodium 2-sulfoethyl methacrylate, 10 parts of acrylic acid, and 30 parts of water, and 7.1 parts of a 5 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, were further added 3.6 parts of a 5 % aqueous ammonium persulfate solution during 1 hour. After completion of the addition, the mixture was further maintained at 95 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (64) having an average molecular weight of 4800 was obtained.

Next, to this were added 2.0 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (65) was obtained.

#### Example 66

The procedure of example 65 was repeated except that 2.0 parts of polyethylene glycol diglycidyl ether (an average mole number of added ethylene oxide is 9) ("DENACOL EX-832", made by NAGASE CHEMICALS Co., Ltd.) was added instead of o-phthalic acid diglycidyl ester used in the example 65, whereby a hydrophilic resin (66) was obtained.

#### Example 67

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 37.2 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. To this were added a mixture solution composed of 5 parts of sodium 2-sulfoethyl methacrylate, 15 parts of acrylic acid, and 30 parts of water, and 8.5 parts of a 2.3 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, were further added 4.3 parts of a 2.3 % aqueous ammonium persulfate solution during 1 hour. After completion of the addition, the mixture was further maintained at 95 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (65) having an average molecular weight of 20000 was obtained.

Next, to this were added 1.0 part of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (67) was obtained.

## Example 68

The procedure of example 63 was repeated except that 1.2 parts of adipic acid diglycidyl ester ("DENACOL EX-701", made by NAGASE CHEMICALS Co., Ltd.) was added instead of o-phthalic acid diglycidyl ester used in the example 63, whereby a hydrophilic resin (68) was obtained.

## Example 69

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 42.8 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. To this were added a mixture solution composed of 12 parts of sodium 3-sulfopropoxyethylene glycol monoacrylate, 8 parts of acrylic acid, and 30 parts of water, and 4.8 parts of a 5 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, were further added 2.4 parts of a 5 % aqueous ammonium persulfate solution during 1 hour. After completion of the addition, the mixture was further maintained at 95 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (66) having an average molecular weight of 6500 was obtained.

Next, to this were added 1.0 part of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (69) was obtained.

## Example 70

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser was placed a mixture composed of 14.4 parts of 2-hydroxyethyl methacrylate, 3.2 parts of 2-sulfoethyl methacrylate, 14.4 parts of methacrylic acid, 0.96 parts of BPO, and 127.0 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture composed of 17.1 parts of 2-hydroxyethyl methacrylate, 3.8 parts of 2-sulfoethyl methacrylate, 17.1 parts of methacrylic acid, 1.14 parts of BPO, and 150.9 parts of IPA during 2 hours and, after the addition finished, was further added a mixture composed of 0.70 parts of BPO and 10.0 parts of IPA during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, partially neutralized with an aqueous sodium hydroxide solution, and treated with distillation to remove IPA, whereby a water-soluble polymer (67) was obtained. Next, 380.0 parts of an aqueous solution of the water-soluble polymer (67) whose concentration was adjusted at 20 % and 3.10 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) were added and maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (70) was obtained.

## Example 71

The procedure of example 70 was repeated except that 2.50 parts of ethylene glycol diglycidyl ether ("DENACOL EX-810", made by NAGASE CHEMICALS Co., Ltd.) was added instead of o-phthalic acid diglycidyl ester used in the example 70, whereby a hydrophilic resin (71) was obtained.

## Example 72

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser was placed a mixture composed of 14.4 parts of 2-hydroxyethyl methacrylate, 3.2 parts of 2-sulfoethyl methacrylate, 14.4 parts of methacrylic acid, 1.14 parts of BPO, and 127.0 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture composed of 17.1 parts of 2-hydroxyethyl methacrylate, 3.8 parts of sulfoethyl methacrylate, 17.1 parts of methacrylic acid, 1.36 parts of BPO, and 150.9 parts of IPA during 2 hours and, after the addition finished, was further added a mixture composed of 0.83 parts of BPO and 10.0 parts of IPA during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, then partially neutralized with an aqueous sodium hydroxide solution, and treated with distillation to

remove IPA, whereby a water-soluble polymer (68) was obtained. Next, 380.0 parts of an aqueous solution of the water-soluble polymer (68) whose concentration was adjusted at 20 % and 3.10 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) were added and maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (72) was obtained.

#### Example 73

The procedure of example 63 was repeated except that 1.0 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-841", made by NAGASE CHEMICALS Co., Ltd.; an average mole number of added ethylene oxide is about 13) were added instead of o-phthalic acid diglycidyl ester used in the example 63, whereby a hydrophilic resin (73) was obtained.

The average molecular weights (weight average) of the above-obtained water-soluble polymers were measured by GPC under said condition and results obtained are shown in Table 3.

Also, viscosity of the above-obtained hydrophilic resins was measured in said way and results obtained are shown in Table 3.

#### Example 74

Ordinary portland cement was used as cement (made by Sumitomo Cement Co., Ltd.), river sand taken from Yodogawa as a fine aggregate (specific gravity of 2.51 and a fineness modulus [F.M.] of 2.78), crushed stones from Takatsuki (specific gravity of 2.68 and a fineness modulus [F.M.] of 6.73) as a coarse aggregate, and the hydrophilic resin (63) obtained from the example 63 as a cement additive, and these materials were respectively weighted to make 30 l in amount of a kneaded mixture with a composition of a unit ratio of 320 kg/m<sup>3</sup> for cement, a unit ratio of 173 kg/m<sup>3</sup> for water (a ratio of water to cement was 54.2 %), a unit ratio of 934 kg/m<sup>3</sup> for fine aggregate, a unit ratio of 876 kg/m<sup>3</sup> for coarse aggregate (a ratio of fine aggregate was 52 %), and an addition amount 0.23 % (a ratio of the solid portion against cement) of the hydrophilic resin (63), and all the materials were placed into a tilting mixer. Immediately, the mixing and kneading were carried out for 3 minutes with a rotation number of 35 r.p.m., a flowing concrete having an object slump of 18 cm and an object air amount of 4.5 % was prepared (in a case of that the object air amount is not attained, a slight amount of an air-entraining agent, [Vinsol] made by Yamaso Chemical Co., Ltd., was used). An obtained flowing concrete immediately after the kneading was sampled and its slump and air amount were measured.

After the kneading finished, the rotational number of the tilting mixer was reduced to 2 r.p.m., the kneading was further continued, and the slump and air amount after 60 minutes, 90 minutes, and 120 minutes were measured to investigate their changes with time-passage.

Also, the compressive strength and setting time of the following concrete obtained were measured. Results obtained are shown in Table 3.

Besides, the measurement methods of the slump, air amount, compressive strength, and setting time and the method to take a sample for testing the compressive strength are based on the Japanese Industrial standards (JIS A6204).

#### Examples 75 to 84

The procedure of example 74 was repeated except that the hydrophilic resins (64) to (73) obtained from the examples 64 to 73 as shown in Table 3 were used as cement additives in the amounts for adding shown in Table 3, and flowing concretes thus-prepared were measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 3.

#### Example for comparison 6

The procedure of example 74 was repeated except that the water-soluble polymer (63) obtained from the example 63 was used as a cement additive in amount of 0.32 % (against cement) instead of the hydrophilic resin (63), and a flowing concrete for comparison thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 3.

Table 3 (Part 1/2)

	Water-soluble polymer		Cement admixture used		The upper side: Slump (cm) The middle side: Air amount (%) The under side: Residual % of slump (*3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	No.	Molecular weight (*1)	Viscosity 1x10 <sup>3</sup> Nsm <sup>-2</sup> (*2)	Addition amount (solid portion, %) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes		
Example 74	(63)	5.200	Hydrophillic resin (63)	11.3	0.23	18.4 4.8	18.2 4.3 9.9	18.0 4.4 9.4	32.5	5:35/7:18
Example 75	(63)	5.200	Hydrophillic resin (64)	12.5	0.23	18.8 4.7	18.5 4.5 9.8	18.2 4.4 9.3	31.8	5:20/7:18
Example 76	(64)	4.800	Hydrophillic resin (65)	30.6	0.22	18.2 4.9	18.8 4.8 10.3	19.0 5.1 10.4	33.8	5:10/7:18
Example 77	(64)	4.800	Hydrophillic resin (66)	35.0	0.25	18.9 4.7	17.8 4.4 9.4	15.8 4.5 8.4	34.5	5:18/7:15
Example 78	(65)	20.000	Hydrophillic resin (67)	12.3	0.27	18.4 4.2	18.2 4.6 9.9	17.8 4.8 9.7	35.0	5:25/7:30
Example 79	(65)	20.000	Hydrophillic resin (68)	20.1	0.23	18.2 4.6	18.5 4.9 10.2	18.0 4.9 9.9	32.0	5:25/7:10
Example 80	(66)	6.500	Hydrophillic resin (69)	15.3	0.23	18.4 4.5	17.4 4.6 9.5	17.2 4.9 9.3	35.0	5:19/7:16
Example 81	(67)	12.500	Hydrophillic resin (70)	18.7	0.20	18.9 4.9	18.6 4.4 9.8	18.5 4.6 9.8	34.4	5:11/7:07

Table 3 (Part 2/2)

	Water-soluble polymer		Cement admixture used			The upper side: Slump (cm) The middle side: Air amount (%) The under side: Residual % of slump (* 3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	No.	Molecular weight (*1)	Viscosity 1x10 <sup>-3</sup> Nam <sup>2</sup> (*2)	Addition amount (solid portion, %) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes			
Example 8 2	(67)	12,500	Hydrophilic resin (71)	16.4	0.20	18.6 4.4	18.0 4.2 9.7	15.6 4.4 8.4	10.8 4.0 5.8	333	5:25/7:31
Example 8 3	(68)	6,300	Hydrophilic resin (72)	13.1	0.18	18.0 4.3	17.6 4.8 9.8	17.1 4.9 9.5	16.8 4.7 9.3	318	5:20/7:26
Example 8 4	(63)	6,200	Hydrophilic resin (73)	12.8	0.30	18.5 4.0	17.4 3.8 9.4	15.5 3.8 8.4	12.0 3.9 6.5	349	5:18/7:21
Example for comparison 6	—	—	Water-soluble polymer (63)	—	0.14	18.6 4.0	8.0 4.2 4.3	— — —	— — —	301	5:50/7:58

(\*1) Measured by G.P.C.


(\*2) Measured by a B type rotational viscometer at 20 °C and 20 %

(\*3) Residual percentage of slump (%) =  $\frac{\text{slump after 60 min. (90 min. or 120 min.)} \times 100}{\text{slump immediately after kneading}}$ 

55 Example 85

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser was placed 760.9 parts of IPA and the inside atmosphere of the flask was

replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 48.0 parts of a compound having the structure as below-pictured ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 278.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA Chemical Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water, and 151.7 parts of an aqueous 2.5 % ammonium persulfate solution during 4 hours and, after the addition finished, was further added 37.9 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (85) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (85) was as shown in Table 4.

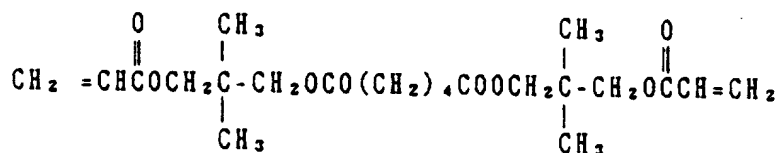

GPC of the copolymer (85) was measured and its eluting curve was shown in Fig. 3. To an aqueous solution of the copolymer (85) was added sodium hydroxide to adjust pH at 12 while stirring at room temperature. The GPC after stirring for 30 minutes and 120 minutes were measured. A GPC eluting curve after stirring for 30 minutes is shown in Fig. 4, and a GPC eluting curve after stirring for 120 minutes is shown in Fig. 5.

As shown in Figs. 3 - 5, a material of high molecular weight having a eluting time of about 60 minutes decreased, and a portion in a eluting time of about 80 minutes which has a cement dispersion character increased.

#### Example 86

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 836.5 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 48.0 parts of a compound used in the example 85 ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 278.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA Chemical Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water, and furthermore, were added 91.2 parts of an aqueous 2.5 % ammonium persulfate solution during 4 hours and, after the addition finished, was further added 22.8 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (86) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (86) was as shown in Table 4.

#### Example 87

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser was placed 760.9 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 48.0 parts of a compound having the structure below-pictured ("Kayarad Manda", made by Nippon Kayaku Co., Ltd.), 278.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA Chemical Co., Ltd.; an average mol number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water, and furthermore, were added 151.7 parts of an aqueous 2.5 % ammonium persulfate solution during 4 hours and, after the addition finished, was further added 37.9 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the




reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (87) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (87) was as shown in Table 4.

5

10

15

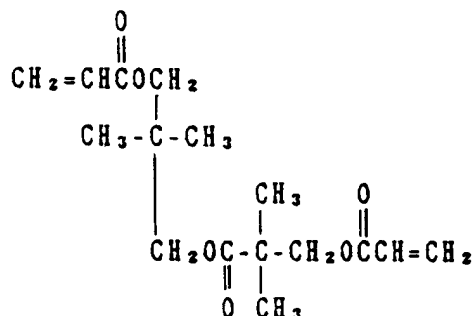


## 20 Example 88

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 48.0 parts of a compound having the structure below-pictured ("Kayarad HX-220", made by Nippon Kayaku Co., Ltd.), 278.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA Chemical Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water, and 151.7 parts of an aqueous 2.5 % ammonium persulfate solution during 4 hours and, after the addition finished, was further added 37.9 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (88) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (88) was as shown in Table 4.

40

45

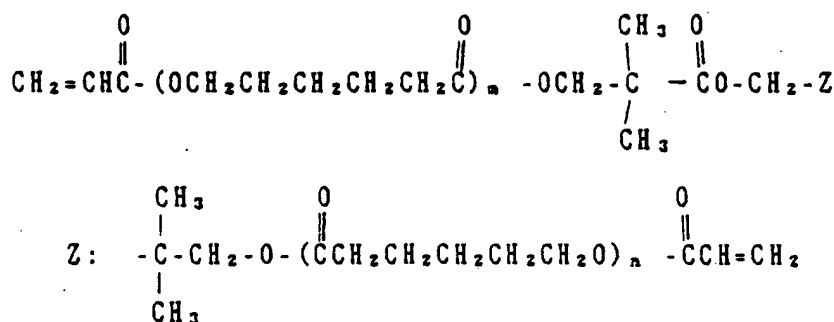

50


$$\bar{m} + \bar{n} = 2$$

( $\bar{m}$  and  $\bar{n}$  indicate the mean values of  $m$  and  $n$ , respectively.)

## 55 Example 89

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA and the inside atmosphere of the flask was

replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 48.0 parts of a compound having the structure below-pictured ("Kayarad DPCA-20", made by Nippon Kayaku Co., Ltd.), 278.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA Chemical Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624. 2 parts of water, and furthermore, were added 151.7 parts of an aqueous 2.5 % ammonium persulfate solution during 4 hours and, after the addition finished, was further added 37.9 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (89) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (89) was as shown in Table 4.

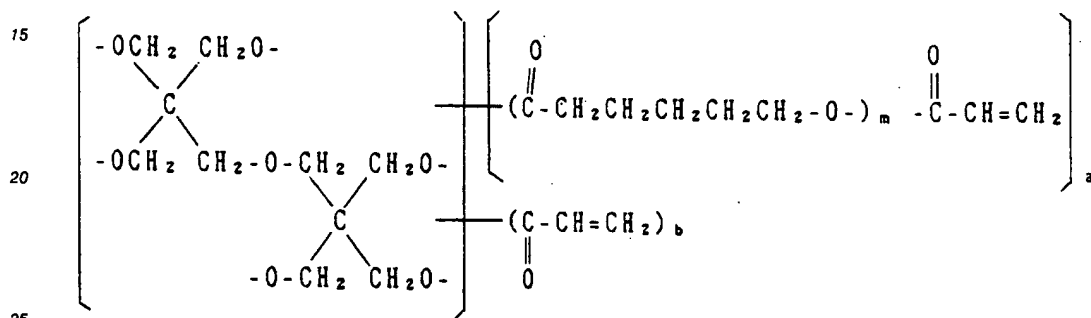

$$\bar{m} = 1, \bar{a} = 2, \bar{b} = 4$$

( $\bar{a}$ ,  $\bar{b}$ , and  $\bar{m}$  indicate the mean values of a, b, and m, respectively.)

#### Example 90

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 797.0 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 48.0 parts of the compound used in the example 88 ("Kayarad HX-220", made by Nippon Kayaku Co., Ltd.), 314.5 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA Co., Ltd.; an average mole number of added ethylene oxide is 9), 75.0 parts of methacrylic acid, 10.5 parts of sodium methacrylate, and 625.5 parts of water, and furthermore, were added 122.8 parts of an aqueous 2.5 % ammonium persulfate solution during 4 hours and, after the addition finished, was further added 30.7 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (90) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (90) was as shown in Table 4.

#### Example 91

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 164.2 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 9.6 parts of a compound used in the example 85 ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 62.9 parts of polyethylene glycol polypropylene glycol methacrylate ("Blenmer 70PEP-350B", made by NIPPON OIL & FATS Co., Ltd.; an average mole number of added ethylene oxide is 7 and that of added propylene oxide is 3), 16.7 parts of methacrylic acid, and 125.5 parts of water, and furthermore, were added 24.6 parts of an aqueous 2.5 %

ammonium persulfate solution during 4 hours and, after the addition finished, was further added 6.1 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (91) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (91) was as shown in Table 4.

#### Example 92

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 48.0 parts of a compound used in the example 85 ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 278.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-23G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 23), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water, and 151.7 parts of an aqueous 2.5 % ammonium persulfate solution during 4 hours and, after the addition finished, was further added 37.9 parts of an aqueous 2.5 % ammonium persulfate solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer, (92) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (92) was as shown in Table 4.

#### Example 93

The procedure of example 85 was repeated except that the compound used in the example 85 ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.) was 72.0 parts in amount, whereby a copolymer (93) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (93) is as shown in Table 4.

#### Example 94

The procedure of example 85 was repeated except that the compound used in the example 85 ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.) was 24.0 parts in amount, whereby a copolymer (94) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (94) is as shown in Table 4.

#### Example 95

The procedure of example 85 was repeated except that 108.2 parts of acrylic acid were used instead of methacrylic acid used in the example 85 and 15.1 parts of sodium acrylate instead of sodium methacrylate, whereby a copolymer (95) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (95) is as shown in Table 4.

#### Example 96

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser was placed a mixture composed of 4.00 g of a compound used in the example 85 ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 17.6 parts of HEMA, 14.4 parts of methacrylic acid, 1.0 part of BPO, and 127.0 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this mixture was added a mixture composed of 4.66 parts of a compound used in the example 85 ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 20.9 parts of HEMA, 17.1 parts of methacrylic acid, 1.1 parts of BPO, and 150.9 parts of IPA during 2 hours and, after the addition finished, were further added 10.7 parts of a 7 % IPA solution of BPO during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (96) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (96) was as shown in Table 4.

## Example for comparison 7

Into a glass-made reaction vessel equipped With a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 390.0 parts of IPA and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 133.0 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 27.0 parts of methacrylic acid, 2.4 parts of BPO, and 240.0 parts of IPA during 2 hours and, after the addition finished, were further added 10.5 parts of a 4.9 % BPO solution during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 2 hours to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer for comparison (1) was obtained. The viscosity of a 20 % aqueous solution of this copolymer for comparison (1) was as shown in Table 4.

## Example 97

Ordinary portland cement was used as cement (made by Sumitomo Cement Co., Ltd.), river sand taken from Yodogawa as a fine aggregate (specific gravity of 2.51 and a fineness modulus [F.M.] of 2.78), crashed stones from Takatsuki (specific gravity of 2.68 and a fineness modulus [F.M.] of 6.73) as a coarse aggregate, and the copolymer (1) obtained from the example 85 as a cement additive, and these materials were respectively weighted to make 30 l in amount of a kneaded mixture with a composition of a unit ratio of 320 kg/m<sup>3</sup> for cement, a unit ratio of 173 kg/m<sup>3</sup> for water (a ratio of water to cement was 54.2 %), a unit ratio of 934 kg/m<sup>3</sup> for fine aggregate, a unit ratio of 876 kg/m<sup>3</sup> for coarse aggregate (a ratio of fine aggregate was 52 %), and an addition amount 0.10 % (a ratio of the solid portion against cement) of the copolymer (85), which is a cement additive, and then all the materials were placed into a tilting mixer. Immediately, the mixing and kneading were carried out with a rotation number of 35 r.p.m for 3 minutes, a flowing concrete having an object slump of 18 cm and an abject air amount of 4.5 % was prepared (in a case of that the abject air amount is not attained, a slight amount of an air-entraining agent, [Vinsol] made by Yamaso Chemical Co., Ltd., was used). An obtained flowing concrete immediately after the kneading was sampled and its slump and air amount were measured.

After the kneading finished, the rotational number of the tilting mixer was reduced to 3 r.p.m., the kneading was further continued, and the slump and air amount after 60 minutes, 90 minutes, and 120 minutes were measured to investigate their changes with time-passage.

Also, the compressive strength and setting time of the flowing concrete obtained were measured. Results obtained are shown in Table 4.

Besides, the measurement methods of the slump, air amount, compressive strength, and setting time and the method to take a sample for testing the compressive strength are based on the Japanese Industrial standards (JIS A6204).

## Examples 98 to 108

The procedure of example 97 was repeated except that the copolymers (86) to (96) obtained from the examples 86 to 96 as shown in Table 4 were used as cement additives in the amount for adding shown in Table 4, and flowing concretes thus-prepared were measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 4.

## Example 109

The procedure of example 97 was repeated except that the copolymer (85) obtained from the example 85 and the copolymer for comparison (1) obtained from the example for comparison 7 were used as cement additives in the amounts for adding shown in Table 4, and a flowing concrete thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 4.

Example 110

Th procedure of example 97 was repeated except that the copolymer (85) obtained from the example 85 and a sodium naphthalenesulfonate-formalin condensation product were used as cement additives in the amounts for adding shown in Table 4, and a flowing concrete thus-obtained was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 4.

Example 111

The procedure of example 97 was repeated except that the copolymer (85) obtained from the example 85 and sodium ligninsulfonate were used as cement additives in the amounts for adding shown in Table 4, and a flowing concrete thus-obtained was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 4.

Example for comparison 8

The procedure of example 97 was repeated except that the copolymer for comparison (1) obtained from the example for comparison 7 was used as a cement additive in an amount of 0.10 % (against cement) instead of the copolymer (85), and a flowing concrete for comparison thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 4.

25

30

35

40

45

50

55

Table 4 (Part 1/2)

	Cement admixture used				Addition amount (solid portion, % (against cement))	The upper side: Slump (cm) The middle side: Air amount (%) The under side: Residual % of slump (*3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/ finishing)	Molecular weight after hydrolysis of copolymer (*1)
	Viscosity 1x10 <sup>3</sup> Nsm <sup>2</sup> (°C)		Immediately after kneading	after 60 minutes		after 90 minutes	after 120 minutes					
	20 °C	25 °C										
Example 97	Copolymer (85)	83.2	77.5	0.10	17.8 5.2 —	18.9 5.0 1.06	18.5 5.1 1.04	17.3 4.9 97	323	5:18/7:30	20.000	
Example 98	Copolymer (86)	290	260	0.10	16.8 4.9 —	18.0 4.8 1.07	18.2 4.9 1.08	17.0 4.7 101	340	5:25/7:29	35.000	
Example 99	Copolymer (87)	71.3	68.2	0.12	18.4 4.5 —	18.3 4.8 99	18.0 4.7 98	17.8 4.4 97	338	5:09/7:13	18.000	
Example 100	Copolymer (88)	90.8	80.4	0.10	18.8 4.9 —	18.6 4.3 99	18.2 4.2 97	17.6 4.0 94	325	5:15/7:20	24.000	
Example 101	Copolymer (89)	129	103	0.10	17.8 5.2 —	17.9 5.0 1.01	18.0 4.8 1.01	17.6 4.4 99	320	5:13/7:12	28.000	
Example 102	Copolymer (90)	60.3	54.8	0.10	18.3 5.0 —	17.2 4.8 94	17.2 4.7 94	17.0 4.3 93	331	5:21/7:25	12.000	
Example 103	Copolymer (91)	82.1	74.5	0.08	18.5 4.9 —	18.8 4.5 1.02	18.6 4.4 1.01	18.0 4.0 97	343	5:26/7:18	21.000	
Example 104	Copolymer (92)	103	94.8	0.14	18.2 4.3 —	19.0 4.5 1.04	19.0 4.7 1.04	18.5 4.6 102	329	5:25/7:28	26.000	
Example 105	Copolymer (93)	140	121.0	0.14	17.3 4.8 —	19.4 4.9 1.12	19.0 5.1 1.10	18.5 5.0 107	340	5:13/7:24	20.000	

Table 4 (Part 2/2)

	Cement admixture used				The upper side: Slump (cm)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)	Molecular weight after hydrolysis of copolymer (*1)
	Viscosity 1x10 <sup>2</sup> N·m <sup>2</sup> (°2)		Addition amount (solid portion, %) (against cement)	The middle side: Air amount (%)							
	20 °C	25 °C		The under side: Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes				
Example 106	Copolymer (9 4)	46.3	41.5	0.10	18.5 4.1	18.0 4.3 9.7	17.5 4.2 9.5	17.0 3.9 9.2	333	5 : 11 / 7 : 29	20,000
Example 107	Copolymer (9 5)	68.4	63.7	0.11	17.5 4.4	18.0 5.0 10.3	17.8 5.1 10.2	17.0 4.5 9.7	319	5 : 19 / 7 : 15	18,000
Example 108	Copolymer (9 6)	61.4	58.4	0.23	17.8 3.8	18.8 4.0 10.6	18.7 4.4 10.5	17.9 4.0 10.1	324	5 : 10 / 7 : 11	12,000
Example 109	Copolymer (85) ) Copolymer for comparison (1)	—	—	0.05+0.05	19.1 4.6	18.8 4.5 9.8	18.0 4.4 9.4	17.2 4.0 9.0	330	5 : 18 / 7 : 25	—
Example 110	Copolymer (85) ) + NSF (*4)	—	—	0.05+0.16	18.3 4.2	18.5 4.4 10.1	17.8 4.0 9.7	17.0 4.0 9.3	319	5 : 12 / 7 : 13	—
Example 111	Copolymer (85) ) + LS (*5)	—	—	0.05+0.16	17.9 4.0	18.3 4.1 10.2	17.8 4.2 9.9	17.1 4.0 9.6	327	5 : 20 / 7 : 18	—
Example for comparison 8	Copolymer for comparison (1)	25.0	23.1	0.10	18.2 4.0	13.4 4.5 7.4	— — —	— — —	330	5 : 28 / 7 : 21	—

(\*1) Measured by G.P.C.

(\*2) Measured by a B type rotational viscometer at 20 °C and 25 °C and 20 %

(\*3) Residual percentage of slump (%) =  $\frac{\text{slump after 60 min. (90 min. or 120 min.)} \times 100}{\text{slump immediately after kneading}}$ 

(\*4) NSF: Sodium naphthalenesulfonate-formalin condensation product

(\*5) LS: Sodium ligninsulfonate

## Example 112

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 707.5 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen

atmosphere. To this were added 200.0 parts of a 80 % aqueous acrylic acid solution and 195.6 parts of a 5 % aqueous sodium persulfat solution during 4 hours. After completion of the addition, the mixture was further maintained at the boiling point for 1 hour to complete a polymerization reaction and partially neutralized with an aqueous sodium hydroxide solution, whereby a water-soluble polymer (112) having an average molecular weight of 4000 was obtained. Next, after water was distilled off, to 536.3 parts of an aqueous solution of the water-soluble polymer (112), whose concentration was adjusted at 40 %, were added 17.2 parts of a compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (112) was obtained.

#### Example 113

The procedure of example 112 was repeated except that 10.7 parts of polyethylene glycol diglycidyl ether ("DENACOL EX-841", made by NAGASE CHEMICALS Co., Ltd.) was added instead of the compound used in the example 16, whereby a hydrophilic resin (113) was obtained.

#### Example 114

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a nitrogen gas-inlet tube, and a reflux condenser were placed 300 parts of water and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere.

Next, to this were added during 2 hours a monomer solution composed of 107.7 parts of a quarternary salt of N,N-dimethylaminoethyl methacrylate and 100.0 parts of water, a monomer solution composed of 52.3 parts of sodium acrylate, and 162.2 parts of water, and 77.8 parts of a 5 % aqueous ammonium persulfate solution, respectively. After completion of the addition, the mixture was further maintained at 95 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer (113) having an average molecular weight of 28000 was obtained.

Next, to this were added 12.8 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the reaction mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (114) was obtained.

#### Example 115

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 378.9 parts of polyalkyleneglycol monoallyl ether (an average mole number of added ethylene oxide is 10) and 188.5 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 88.2 parts of maleic acid, 14 parts of ammonium persulfate, and 132.3 parts of water during 120 minutes and, after the addition finished, were further added 14 parts of a 20 % aqueous ammonium persulfate solution during 20 minutes. After the addition finished, the reaction mixture was maintained at 95 °C for 100 minutes to complete a polymerization reaction and then, partially neutralized with an 40 % aqueous sodium hydroxide solution, whereby a water-soluble polymer (114) having an average molecular weight of 3000 was obtained.

Next, to this polymer were added 28.4 parts of the compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and then, completely neutralized With an aqueous sodium hydroxide solution, whereby a hydrophilic resin (115) was obtained.

#### Example 116

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a nitrogen gas-inlet tube, and a reflux condenser were placed 30 parts of polyethyl neglycol monoallyl ether (an average mole number of ethylene oxide added is 10) and 475 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. Next, to this were added during 120 minutes 447 parts of a 38 % aqueous sodium acrylate solution and 40 parts of a 5 % aqueous ammonium persulfate solution, respectively. After the



addition finished, were further added 8 parts of a 5 % aqueous ammonium persulfate solution during 20 minutes. After this addition finished, the reaction mixture was maintained at 95 °C for 120 minutes to complete a polymerization reaction, whereby a water-soluble polymer (115) having an average molecular weight of 5200 was obtained.

- 5 Next, to this polymer were added 20.0 parts of the compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (116) was obtained.

#### Example 117

10

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 60 parts of polyethyleneglycol monoallyl ether (an average mole number of ethylene oxide added is 30) and 524 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. Next, to this were added during 120 minutes 368 parts of 38 % sodium methacrylate and 40 parts of a 5 % aqueous ammonium persulfate solution, respectively. After the addition finished, was further added 8 parts of a 5 % aqueous ammonium persulfate solution during 20 minutes. After this addition finished, the reaction mixture was maintained at 95 °C for 120 minutes to complete a polymerization reaction, whereby a water-soluble polymer (116) having an average molecular weight of 18000 was obtained.

20 Next, to this polymer were added 20.0 parts of the compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (117) was obtained.

#### 25 Example 118

The procedure of example 117 was repeated except that 20.0 parts of polyethyleneglycol diglycidyl ether ("DENACOL EX-830", made by NAGASE CHEMICALS Co., Ltd.) was added instead of the compound used the example 16, whereby a hydrophilic resin (118) was obtained.

30

#### Example 119

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, three dropping funnels, a gas-inlet tube, and a reflux condenser were placed 801.2 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. Next, to this were added a mixture composed of 314.4 parts of acrylic acid, 45.6 parts of sodium acrylate, and 360 parts of water, a mixture composed of 11.1 parts of ammonium persulfate and 99.6 parts of water, and a mixture composed of 50.5 parts of sodium hydrogen sulfite and 117.7 parts of water during 240 minutes through the individual funnels. After the addition finished, the reaction mixture was maintained at 95 °C for 60 minutes to complete a polymerization reaction.

40 Next, a polymerization product obtained was cooled to 40 °C, to which 166.7 parts of ethyleneimine were added during 1 hour. After the addition finished, the reaction mixture was warmed up to 90 °C and maintained at this temperature for 120 minutes to complete an addition reaction, whereby a water-soluble polymer (117) was obtained. The aminoethylated percentage of this polymer (117) was measured with quantitative determination of unreacting carboxyl groups by conductivity titration and the result indicated that the reacting mole number of ethyleneimine per one mole carboxyl group in this polymer was 0.8.

45 Next, to this polymer were added 35.3 parts of the compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (119) was obtained.

50

#### Example 120

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, three dropping funnels, a gas-inlet tube, and a reflux condenser were placed 278.6 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. Next, to this were added a mixture composed of 160 parts of methacrylic acid and 240 parts of water and a mixture composed of 12.1 parts of ammonium persulfate and 68.8 parts of water during 120 minutes, respectively. Subsequently, a mixture composed of 6.1 parts of ammonium persulfate and 34.4

parts of water was added during 60 minutes. After the addition finished, the reaction mixture was maintained at 95 °C for 60 minutes to complete a polymerization reaction.

Next, a polymerization product obtained was cooled to 30 °C, to which 255.6 parts of water were added, and the mixture was warmed up to 40 °C, to which 63.9 parts of ethyleneimine were added during 1 hour. After the addition finished, the reaction mixture was warmed up to 90 °C and maintained at this temperature for 120 minutes to complete an addition reaction, whereby an aqueous solution of a water-soluble polymer (118) was obtained. The aminoethylated percentage of this polymer (118) was measured with quantitative determination of unreacting carboxyl groups by conductivity titration and the result indicated that the reacting mole number of ethyleneimine per one mole carboxyl group in this polymer was 0.8.

Next, to this polymer were added 15.43 parts of the compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (120) was obtained.

#### Example 121

Into a steel-made autoclave equipped with a thermometer, a stirrer, a pressure meter, and two gas-inlet tubes were placed 89 parts of maleic anhydride, 15.0 parts of BPO, and 875 parts of dichloroethane, the inside air of the autoclave was sufficiently replaced with stirring by ethylene gas by repeatedly applying a pressure and withdrawing it with 10 kg/cm<sup>2</sup> of ethylene, and a polymerization reaction was carried out at 70 °C during 10 hours keeping a pressure of 20 to 30 kg/cm<sup>2</sup> with further addition of ethylene. A reaction product was taken out easily with filtration and dried under vacuum, whereby 95.1 parts of a polymer having a carboxyl group was obtained.

The composition ratio of maleic anhydride to ethylene in the polymer having a carboxyl group thus-obtained was determined by titration analysis with an aqueous sodium hydroxide solution and an analysis result indicated a 29 : 71 mole ratio of maleic anhydride to ethylene. In addition, a number average molecular weight of the polymer having a carboxyl group was shown as 21,000 with high performance liquid chromatography.

Next, into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 95.1 parts of the polymer having a carboxyl group and 403.2 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed at 80 °C for 2 hours under the nitrogen atmosphere, whereby an aqueous solution of the polymer having a carboxyl group was obtained. Next, this aqueous solution was cooled to 40 °C and to this solution were added 39.3 parts of ethyleneimine during 1 hour while maintaining the temperature at 40 °C. After the addition finished, the reaction mixture was warmed up to 90 °C and maintained at this temperature for 120 minutes to complete an addition reaction, whereby an aqueous solution of a water-soluble polymer (119) was obtained.

The aminoethylated percentage of this polymer (119) was measured with quantitative determination of unreacting carboxyl groups by conductivity titration and the result indicated that the reacting mole number of ethyleneimine per one mole carboxyl group in this polymer (119) was 0.8. Next, to this polymer were added 8.1 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (121) was obtained.

#### Example 122

Into the same glass-made reaction vessel as used for the example 121 were placed 136.3 parts of maleic anhydride and 221.3 parts of methyl ethyl ketone, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 92 °C under the nitrogen atmosphere. Next, to this were added a mixture composed of 144.9 parts of styrene and 144.9 parts of methyl ethyl ketone and a mixture composed of 13.9 parts of BPO and 55.6 parts of methyl ethyl ketone during 120 minutes. After addition finished, the reaction mixture was maintained at 92 °C for 60 minutes to complete a polymerization reaction and, then evaporated, whereby 280.7 parts of a polymer having a carboxyl group was obtained.

The number average molecular weight of the polymer having a carboxyl group thus-obtained was measured as 35,000.

Next, into the same glass-made reaction vessel as used above were placed 280.7 parts of the polymer having a carboxyl group and 1076 parts of water, and the inside atmosphere of the flask was replaced with

stirring by nitrogen gas and the flask was warmed up to 40 °C under the nitrogen atmosphere. Next, while maintaining at this temperature, to this flask were added 78.0 parts of ethyleneimine during 1 hour. After addition finished, the reaction mixture was warmed up to 90 °C and maintained at this temperature for 120 minutes to complete an addition reaction, whereby an aqueous solution of a water-soluble polymer (120) was obtained.

The aminoethylated percentage of this water-soluble polymer (120) was measured with quantitative determination of unreacting carboxyl groups by conductivity titration and the result indicated that the reacting mole number of ethyleneimine per one mole carboxyl group in this polymer (120) was 8.0.

Next, to this polymer were added 21.5 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (122) was obtained.

#### Example 123

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 320.0 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. Next, to this was added a mixture solution composed of 136.0 parts of sodium p-styrenesulfonate, 24.0 parts of acrylic acid, and 160.0 parts of water, and furthermore, were added 106.7 parts of a 10 % aqueous ammonium persulfate solution during 2 hours and, after the addition finished, 53.3 parts of a 10 % aqueous ammonium persulfate solution were further added during 1 hour. After the addition finished, the reaction mixture was maintained at 95 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer having an average molecular weight of 17,000 (121) was obtained.

Next, to this polymer were added 128.0 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (123) was obtained.

#### Example 124

Into an autoclave a mixture composed of 98 parts of maleic anhydride, 110 parts of a C<sub>5</sub>-olefinic mixture (in a composition of 15.34 % of iso-pentane, 15.28 % of n-pentane, 41.97 % of 2-methylbutene-1, 26.56 % of pentene-1, and 0.85 % of isoprene), 4 parts of BPO, and 400 parts of benzene was subjected to reacting at 70 to 75 °C for 8 hours with heating and stirring. After the reaction finished, a reaction product separated was collected with filtration and dried, whereby 96 parts of a polymer were obtained. A mixture of 84 parts of this polymer and 400 parts of a 10 % aqueous sodium hydroxide solution was warmed up to 80 to 90 °C with stirring, whereby a water-soluble polymer having an average molecular weight of 4500 (122) was obtained. Next, to this polymer were added 10.1 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction, whereby a hydrophilic resin (124) was obtained.

#### Example 125

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 2326 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 95 °C under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 386.8 parts of sodium 2-sulfoethyl methacrylate, 53.8 parts of acrylic acid, and 13.5 parts of water, a mixture solution composed of 485.4 parts of sodium acrylate, and 826.6 parts of water, and 251.4 parts of a 10 % aqueous ammonium persulfate solution during 2 hours. After the addition finished, 41.9 parts of 10 % aqueous ammonium persulfate solution were further added during 20 minutes. After the addition finished, the reaction mixture was maintained at 95 °C for 1 hour to complete a polymerization reaction, whereby a water-soluble polymer having an average molecular weight of 4000 (123) was obtained.

Next, to 100 parts of this polymer (123) were added 100 parts of the water-soluble polymer (1) obtained from the example 1 and 2.34 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (125) was obtained.

## Example for comparison 9

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 16.0 parts of methyl acrylate, 16.0 parts of acrylic acid, 0.64 parts of BPO, and 124.8 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas, the mixture in the flask was warmed up to the boiling point under the nitrogen atmosphere and maintained at this temperature for 30 minutes. Next, to this mixture was added a mixture solution composed of 64.0 parts of methyl acrylate, 64.0 parts of acrylic acid, 2.56 parts of BPO, and 499.2 parts of IPA during 3 hours and, after the addition finished, were further added a dispersed solution composed of 0.32 parts of BPO and 6.08 parts of IPA twice with an hour interval. After the addition finished, the reaction mixture was maintained at the boiling point for 2 hours to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby a copolymer for comparison (3) having an average molecular weight of 18,000 was obtained.

## Example for comparison 10

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser was placed a mixture composed of 5.30 parts of polyethyleneglycol dimethacrylate (an average mole number of added ethylene oxide is 9), 32.0 parts of methacrylic acid, 1.0 part of BPO, and 127.0 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas, the mixture in the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this mixture was added a mixture composed of 6.17 parts of polyethyleneglycol dimethacrylate, 38.0 parts of methacrylic acid, 1.1 parts of BPO, and 150.9 parts of IPA during 2 hours and, after the addition finished, was further added 10.7 parts of a 7 % IPA solution of BPO during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer for comparison (4) was obtained.

The average molecular weights (weight average) of the above-obtained water-soluble polymers and the average molecular weights (weight average) after hydrolysis (in said way) of the above-obtained copolymers were measured by GPC under said condition and results obtained are shown in the Table 5.

Also, viscosity of the hydrophilic resins and the copolymers above-obtained was measured in said way and results obtained are shown in the Table 5.

## Example 126

Ordinary portland cement was used as cement (made by Sumitomo Cement Co., Ltd.), river sand taken from Yodogawa as a fine aggregate (specific gravity of 2.51 and a fineness modulus [F.M.] of 2.78), crashed stones from Takatsuki (specific gravity of 2.68 and a fineness modulus [F.M.] of 6.73) as a coarse aggregate, and the hydrophilic resin (112) obtained from the example 112 as a cement additive, and these materials were respectively weighted to make 30 l in amount of a kneaded mixture with a composition of a unit ratio of 320 kg/m<sup>3</sup> for cement, a unit ratio of 173 kg/m<sup>3</sup> for water (a ratio of water to cement was 54.2 %), a unit ratio of 934 kg/m<sup>3</sup> for fine aggregate, a unit ratio of 876 kg/m<sup>3</sup> for coarse aggregate (a ratio of fine aggregate was 52 %), and an addition amount 0.12 % (a ratio of the solid portion against cement) of the hydrophilic resin (112), and all the materials were placed into a tilting mixer. Immediately, the mixing and kneading were carried out for 3 minutes with a rotation number of 35 r.p.m., and a fluid concrete having an object slump of 18 cm and an object air amount of 4.5 % was prepared (in a case of that the object air amount is not attained, a slight amount of an air-entraining agent, [Vinsol] made by Yamaso Chemical Co., Ltd., was used). An flowing concrete obtained immediately after the kneading was sampled and its slump and air amount were measured.

After the kneading finished, the rotation number of the tilting mixer was reduced to 2 r.p.m., the mixing and kneading were further continued, and the slump and air amount were measured after 60 minutes, 90 minutes, and 120 minutes, to investigate their changes with time-passage.

Also, the compressive strength and setting time of the flowing concrete obtained were measure. Results obtained are shown in Tabl 5.

Besides, the measurement methods of the slump, air amount, compressive strength, and setting time and the method to take a sample for testing the compressive strength are based on the Japanes Industrial standards (JIS A6204).

Examples 127 to 139

The procedure of example 126 was repeated except that the hydrophilic resins (113) to (125) obtained from the examples 113 to 125 as shown in Table 5 were used as cement additives in the amounts for adding shown in Table 5, and flowing concretes thus-prepared were measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 5.

Example for comparison 11

The procedure of example 126 was repeated except that the copolymer for comparison (3) was used as a cement additive in an amount for adding of 0.40 % (against cement) instead of the hydrophilic resin (112), and a flowing concrete for comparison thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 5.

Example for comparison 12

The procedure of example 126 was repeated except that the copolymer for comparison (4) was used as a cement additive in an amount for adding of 0.35 % (against cement) instead of the hydrophilic resin (112), and a flowing concrete for comparison thus-prepared was measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 5.

25

30

35

40

45

50

55

Table 5 (Part 1/2)

	Water-soluble polymer		Cement admixture used			The upper side: Slump (ca) The middle side: Air amount (%) The under side: Residual % of slump (*3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	No.	Molecular weight (*1)	Viscosity 1x10 <sup>-3</sup> Nam <sup>2</sup> (*2)	Addition amount (solid portion, %)	(against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes		
Example 126	(112)	4. 0 0 0	8. 0 0 0	0.3 0	Hydrophilic resin (112)	12.3 4.0	17.4 4.9 14.1	18.5 5.1 15.0	17.0 5.0 13.8	318	5:48/7:41
Example 127	(112)	4. 0 0 0	9. 0 0 0	0.4 0	Hydrophilic resin (113)	18.0 4.0	16.9 3.9 9.4	14.8 3.8 8.2	10.9 3.7 6.1	303	5:58/7:48
Example 128	(113)	28. 0 0 0	49.1	0.3 0	Hydrophilic resin (114)	17.8 4.5	17.7 4.2 9.9	17.4 4.3 9.8	17.0 4.0 9.6	340	5:13/7:25
Example 129	(114)	3. 0 0 0	30.4	0.2 0	Hydrophilic resin (115)	18.3 4.9	19.0 4.9 10.4	18.0 4.9 9.8	17.4 4.3 9.5	339	5:40/7:50
Example 130	(115)	5. 2 0 0	46.7	0.2 0	Hydrophilic resin (116)	17.8 4.5	18.4 4.6 10.3	17.9 4.7 10.1	17.1 4.3 9.6	325	5:27/7:41
Example 131	(116)	18. 0 0 0	73.4	0.2 2	Hydrophilic resin (117)	17.8 4.1	18.4 4.5 10.3	18.0 4.6 10.1	17.4 4.3 9.8	318	5:38/7:44
Example 132	(116)	18. 0 0 0	84.3	0.3 5	Hydrophilic resin (118)	17.3 4.3	17.0 4.3 9.8	14.8 4.2 8.6	12.1 4.0 7.0	329	5:17/7:24
Example 133	(117)	6. 4 0 0	38.1	0.3 0	Hydrophilic resin (119)	18.3 4.0	18.7 4.2 10.2	18.4 4.5 10.1	17.8 4.4 9.7	331	5:24/7:19

Table 5 (Part 2/2)

	Water-soluble polymer		Cement admixture used			The upper side: Slump (cm) The middle side: Air amount (%) The under side: Residual % of slump (*3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	No.	Molecular weight (*1)	Viscosity 1x10 <sup>3</sup> Nsm <sup>2</sup> (*2)	Addition amount (solid portion, %) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes			
Example 134	(118)	7, 8 0 0	Hydrophilic resin (120)	55.8	0.30	17.2 3.8 —	18.8 4.0 10.9	18.4 4.7 10.7	17.3 4.4 10.1	320	5:31/7:28
Example 135	(119)	25. 0 0 0	Hydrophilic resin (121)	80.4	0.30	18.8 4.5 —	18.5 4.8 9.8	18.0 4.5 9.6	17.0 4.3 9.0	311	5:19/7:30
Example 136	(120)	40. 0 0 0	Hydrophilic resin (122)	104.5	0.30	18.3 4.7 —	18.0 4.3 9.8	17.3 4.2 9.5	17.1 4.0 9.3	340	5:13/7:28
Example 137	(121)	17. 0 0 0	Hydrophilic resin (123)	43.1	0.26	18.4 3.7 —	18.0 3.9 9.8	17.4 4.0 9.5	16.8 3.7 9.1	333	5:04/7:11
Example 138	(122)	4. 5 0 0	Hydrophilic resin (124)	31.3	0.23	17.8 4.0 —	17.6 4.5 9.9	17.0 4.3 9.6	16.6 4.0 9.3	314	5:20/7:14
Example 139	(123) (1)	4. 0 0 0 20. 0 0 0	Hydrophilic resin (125)	52.0	0.20	16.2 4.3 —	19.8 4.5 12.2	19.2 4.4 11.9	19.0 4.3 11.7	353	5:18/7:24
Example for comparison 11	—	18. 0 0 0	Copolymer for comparison (3)	18.4	0.40	17.9 3.8 —	8.1 4.0 4.5	— — —	— — —	338	5:45/7:51
Example for comparison 12	—	20. 0 0 0	Copolymer for comparison (4)	41.3	0.35	18.2 4.2 —	7.5 4.0 4.1	— — —	— — —	302	6:25/8:31

(\*1) Measured by G.P.C.

(\*2) Measured by a 8 type rotational viscometer at 20 °C and 20 %

(\*3) Residual percentage of slump (%) =  $\frac{\text{slump after 60 min. (90 min. or 120 min.)}}{\text{slump immediately after kneading}} \times 100$ 

55 Example 140

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 58.1 parts of water, and the inside atmosphere of the flask was

replaced with stirring by nitrogen gas and the flask was warmed up to 50 °C under the nitrogen atmosphere. Next, to this were added a monomer mixture solution composed of 5.21 parts of 2-acrylamido-2-methylpropanesulfonic acid, 0.42 parts of sodium methacrylate, 20.5 parts of methacrylic acid, 93.9 parts of methoxypolyethyleneglycol monomethacrylate (an average mole number of added ethylene oxide is 9), and 187.7 parts of water and, in addition, 18.2 parts of a 20 % aqueous ammonium persulfate solution and 9.12 parts of a 20 % sodium hydrogen sulfite solution during 4 hours and, after the addition finished, 4.6 parts of a 20 % aqueous ammonium persulfate solution and 2.3 parts of a 20 % sodium hydrogen sulfite solution were further added during 1 hour. After the addition finished, the reaction mixture was maintained at 50 °C for 1 hour to complete a polymerization reaction, whereby an aqueous solution of a water-soluble polymer having an average molecular weight of 12,000 (140) was obtained.

Next, to this polymer were added 200.0 parts of water and 4.0 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (140) was obtained.

#### Example 141

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a nitrogen gas-inlet tube, and a reflux condenser were placed 58.1 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to 50 °C under the nitrogen atmosphere. Next, to this were added a monomer mixture solution composed of 5.21 parts of sodium 2-sulfoethylmethacrylate, 0.42 parts of sodium methacrylate, 20.5 parts of methacrylic acid, 93.9 parts of methoxypolyethylene glycol monomethacrylate (an average mole number of added ethylene oxide is 9), and 187.7 parts of water and, in addition, 18.2 parts of a 20 % aqueous ammonium persulfate solution and 9.12 parts of a 20 % sodium hydrogen sulfite solution during 4 hours, respectively and, after the addition finished, 4.6 parts of a 20 % aqueous ammonium persulfate solution and 2.3 parts of a 20 % sodium hydrogen sulfite solution were further added during 1 hour. After the addition finished, the reaction mixture was maintained at 50 °C for 1 hour to complete a polymerization reaction, whereby a 20 % aqueous solution of a water-soluble polymer having an average molecular weight of 10,000 (141) was obtained. Next, to this polymer were added 3.2 parts of o-phthalic acid diglycidyl ester ("DENACOL EX-721", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (141) was obtained.

#### Example 142

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 707.5 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added 180.0 parts of a 80 % aqueous acrylic acid solution, 16.0 parts of vinylsulfonic acid and 195.6 parts of an 5 % aqueous sodium persulfate solution during 4 hours. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction and then, partially neutralized with an aqueous sodium hydroxide solution, whereby a water-soluble polymer having an average molecular weight of 5000 (142) was obtained. Next, to 500.0 parts of the aqueous solution of the water-soluble polymer (142) whose concentration was adjusted at 40 % by distilling water were added 10.0 parts of the compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (142) was obtained.

#### Example 143

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 707.5 parts of water, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added 180.0 parts, of a 80 % aqueous acrylic acid solution, 16.0 parts of diethylaminoethylmethacrylamide, and 195.6 parts of an 5 % aqueous sodium persulfate solution during 4 hours. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to




complete a polymerization reaction and then, partially neutralized with an aqueous sodium hydroxide solution, whereby a water-soluble polymer having an average molecular weight of 6000 (143) was obtained. Next, to 500.0 parts of the aqueous solution of the water-soluble polymer (143) whose concentration was adjusted at 40 % by distilling water were added 10.0 parts of the compound used in the example 16 ("DENACOL EX-202", made by NAGASE CHEMICALS Co., Ltd.) and the mixture was maintained at the boiling point for 3 hours to complete a reaction and completely neutralized with an aqueous sodium hydroxide solution, whereby a hydrophilic resin (143) was obtained.

#### Example 144

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 48.0 parts of a compound having the forementioned structure ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 40.1 parts of 2-acrylamido-2-methylpropanesulfonic acid, 237.9 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water and, in addition, 151.7 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, 37.9 parts of a 2.5 % aqueous ammonium persulfate solution were added during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, then treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (144) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (144) is as shown in the table 6.

#### Example 145

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 48.0 parts of a compound having the following structure ("DA-721", made by NAGASE CHEMICALS Co., Ltd.), 40.1 parts of 2-sulfoethyl-methacrylate, 237.9 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water and, in addition, 151.7 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, 37.9 parts of a 2.5 % aqueous ammonium persulfate solution were added during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, then treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (145) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (145) is as shown in the Table 6.

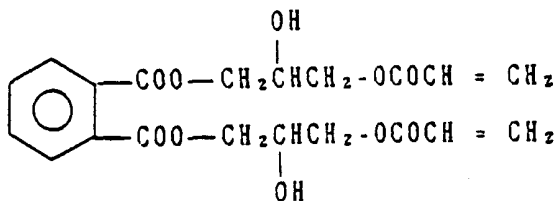

#### Example 146

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 48.0 parts of a compound having the

forementioned structure ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 40.1 parts of N,N-dimethylaminoethyl methacrylate, 237.9 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water and, in addition, 151.7 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, 37.9 parts of a 2.5 % aqueous ammonium persulfate solution were added during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, then treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (146) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (146) is as shown in the table 6.

#### Example 147

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 48.0 parts of a compound having the forementioned structure ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 60.2 parts of styrenesulfonic acid, 217.8 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water and, in addition, 151.7 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, 37.9 parts of a 2.5 % aqueous ammonium persulfate solution were added during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, then treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (147) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (147) is as shown in the Table 6.


#### Example 148

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 48.0 parts of a compound having the forementioned structure ("Kayarad R-526", made by Nippon Kayaku Co., Ltd.), 60.2 parts of vinylsulfonic acid, 217.8 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water and, in addition, 151.7 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, 37.9 parts of a 2.5 % aqueous ammonium persulfate solution were added during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a polymerization reaction, then treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (148) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (148) is as shown in the Table 6.

#### Example 149

Into a glass-made reaction vessel equipped with a thermometer, a stirrer, a dropping funnel, a gas-inlet tube, and a reflux condenser were placed 760.9 parts of IPA, and the inside atmosphere of the flask was replaced with stirring by nitrogen gas and the flask was warmed up to the boiling point under the nitrogen atmosphere. Next, to this were added a mixture solution composed of 50.0 parts of a compound having the following structure ("DM-832", made by NAGASE CHEMICALS Co., Ltd.), 80.3 parts of diethylaminoethyl-methacrylamide, 197.7 parts of methoxypolyethylene glycol monomethacrylate ("NK-ester M-9G", made by SHIN-NAKAMURA CHEMICAL Co., Ltd.; an average mole number of added ethylene oxide is 9), 108.2 parts of methacrylic acid, 15.1 parts of sodium methacrylate, and 624.2 parts of water and, in addition, 151.7 parts of a 2.5 % aqueous ammonium persulfate solution during 4 hours and, after the addition finished, 37.9 parts of a 2.5 % aqueous ammonium persulfate solution were added during 1 hour. After the addition finished, the reaction mixture was maintained at the boiling point for 1 hour to complete a

polymerization reaction, then treated with distillation to remove IPA, and completely neutralized with an aqueous sodium hydroxide solution, whereby an aqueous solution of a copolymer (149) was obtained. The viscosity of a 20 % aqueous solution of this copolymer (149) is as shown in the Table 6.

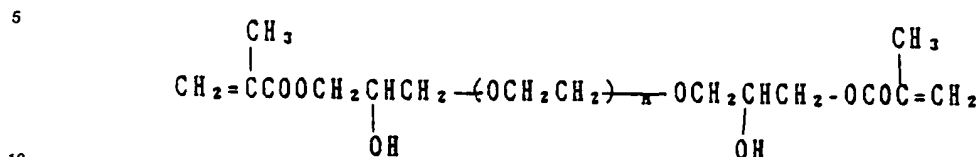

(n = 9)

The average molecular weights (weight average) of the above-obtained water-soluble polymers and the average molecular weights (weight average) after hydrolysis (in said way) of the above-obtained copolymers were measured by GPC under said condition and results obtained are shown in the Table 6.

Also, viscosity of the hydrophilic resins and the copolymers above-obtained was measured in said way and results obtained are shown in the Table 6.

#### Example 150

Ordinary portland cement was used as cement (made by Sumitomo Cement Co., Ltd.), river sand taken from Yodogawa as a fine aggregate (specific gravity of 2.51 and a fineness modulus [F.M.] of 2.78), crashed stones from Takatsuki (specific gravity of 2.68 and a fineness modulus [F.M.] of 6.73) as a coarse aggregate, and the hydrophilic resin (140) obtained from the example 140 as a cement additive, and these materials were respectively weighted to make 30 l in amount of a kneaded mixture with a composition of a unit ratio of 320 kg/m<sup>3</sup> for cement, a unit ratio of 173 kg/m<sup>3</sup> for water (a ratio of water to cement was 54.2 %), a unit ratio of 934 kg/m<sup>3</sup> for fine aggregate, a unit ratio of 876 kg/m<sup>3</sup> for coarse aggregate (a ratio of fine aggregate was 52 %), and an addition amount 0.15 % (a ratio of the solid portion against cement) of the hydrophilic resin (140), and all the materials were placed into a tilting mixer. Immediately, the mixing and kneading were carried out for 3 minutes with a rotation number of 35 r.p.m., and a flowing concrete having an object slump of 18 cm and an object air amount of 4.5 % was prepared (in a case of that the object air amount is not attained, a slight amount of an air-entraining agent, [Vinsol] made by Yamaso Chemical Co., Ltd., was used). An flowing concrete obtained immediately after the kneading was sample and its slump and air amount were measured.

After the kneading finished, the rotation number of the tilting mixer was reduced to 3 r.p.m., the mixing and kneading were further continued, and the slump and air amount were measured after 60 minutes, 90 minutes, and 120 minutes, to investigate their changes with time-passage.

Also, the compressive strength and setting time of the flowing concrete obtained were measured. Results obtained are shown in Table 6.

Besides, the measurement methods of the slump, air amount, compressive strength, and setting time and the method to take a sample for testing the compressive strength are based on the Japanese Industrial standards (JIS A6204).

#### Examples 151 to 153

The procedure of example 150 was repeated except that the hydrophilic resins (141) to (143) obtained from the examples 141 to 143 as shown in Table 6 were used as cement additives in the amounts for adding shown in Table 6, and flowing concretes thus-prepared were measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 6.

#### Examples 154 to 159

The procedure of example 150 was repeated except that the copolymers (144) to (149) obtained from the examples 144 to 149 as shown in Table 6 were used as cement additives in the amounts for adding shown in Table 6, and flowing concretes thus-prepared were measured in the slump, air amount, compressive strength, and setting time. Results obtained are shown in Table 6.

Table 6 (Part 1/2)

	Water-soluble polymer		Cement admixture used				The upper side: Slump (ca) The middle side: Air amount (Q) The under side: Residual % of slump (※3)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	N o.	Molecular weight (※1)	Viscosity 1×10 <sup>3</sup> Nsm <sup>-2</sup> (※2)	Addition amount (solid portion, %) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes				
Example 150	(140)	12,000	2,100	0.15	18.9 5.1 —	18.9 5.1 10.0	18.0 5.0 9.5	17.5 4.9 9.3	338	5:10/7:40		
Example 151	(141)	10,000	900	0.15	18.4 4.8 —	18.0 4.9 9.8	17.4 4.7 9.5	17.0 4.6 9.2	350	5:12/7:29		
Example 152	(142)	5,000	1,200	0.22	18.6 4.3 —	18.8 4.5 10.1	18.3 4.8 9.8	17.5 4.5 9.4	343	5:40/7:51		
Example 153	(143)	6,000	1,800	0.26	18.0 4.0 —	18.3 4.3 10.2	18.4 4.7 10.2	17.8 4.5 9.9	330	5:38/7:43		
Example 154	—	15,000 (※4)	90.4	0.12	18.3 4.5 —	18.5 4.7 10.1	18.4 4.9 10.1	17.8 4.6 9.7	337	5:30/7:40		
Example 155	—	12,000 (※4)	68.3	0.12	17.8 4.3 —	18.5 4.6 10.4	18.2 4.5 10.2	17.1 4.1 9.6	351	5:21/7:15		

Table 6 (Part 2/2)

	Water-soluble polymer		Cement admixture used		Slump (cm)				Condensation strength at age of 28 days (kg/cm <sup>2</sup> )	Setting time (hour:minute) (beginning/finishing)
	N o.	Molecular weight (*1)	Viscosity 1x10 <sup>3</sup> Nam <sup>2</sup> (*2)	Addition amount (solid portion, %) (against cement)	Immediately after kneading	after 60 minutes	after 90 minutes	after 120 minutes		
Example 156	—	13,000 (*4)	75.4	0.14	18.3 4.0	18.5 4.5 10.1	18.0 4.7 9.8	17.3 4.1 9.5	320	5:13/7:27
Example 157	—	13,000 (*4)	80.1	0.12	18.1 4.3	18.3 4.6 10.1	18.5 4.8 10.2	18.0 4.2 9.9	341	5:18/7:21
Example 158	—	10,000 (*4)	61.8	0.12	17.8 4.0	18.0 4.4 10.1	18.2 4.6 10.2	17.5 4.2 9.8	323	5:29/7:41
Example 159	—	12,000 (*4)	78.5	0.12	18.5 4.8	17.8 4.7 9.6	16.5 4.5 8.9	12.4 4.1 6.7	337	5:10/7:15

(\*1) Measured by G.P.C.

(\*2) Measured by a B type rotational viscometer at 20 °C and 20 %


(\*3) Residual percentage of slump (%) =  $\frac{\text{slump after 60 min. (90 min. or 120 min.)} \times 100}{\text{slump immediately after kneading}}$ 

(\*4) Molecular weight after hydrolysis of copolymer


From the result as shown in the Tables 1 to 6, it is apparent that cement additives of the present invention show almost no retardation of setting and manifest a superior property to prevent a slump loss.

## Claims


1. A cement additive composed of a crosslinked polymer in which a bond is formed between main chains having a water-soluble polymer structure of a molecular weight from 500 to 100,000 and wherein said bond has as a structural unit at least one group selected from divalent groups of formula (I)






wherein R<sup>1</sup> and R<sup>2</sup> independently denote any one of the following groups:



R and R' independently denote an alkyl group of carbon number of 1 to 5; with the proviso that where R<sup>2</sup> is a group









then group R<sup>1</sup> may be present or absent; and wherein said main chains have at least one kind of functional group selected from the following groups 1 to 5:




wherein m is 0 or an integral number of 1 to 50; n is 0 or 1; M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>5</sup> and R<sup>6</sup> independently denote an alkylene group of carbon number 2 to 4; R<sup>7</sup> denotes an alkylene group of carbon number 1 to 5; and when m is 2 or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular.

2. A cement additive as claimed in Claim 1, in which said main chains additionally have at least one kind of functional group selected from the following groups 6 to 12:

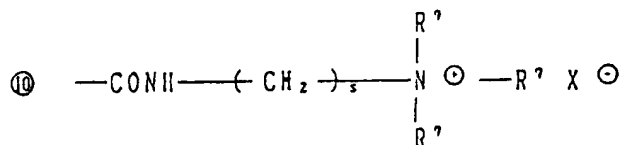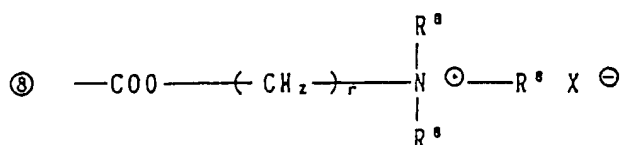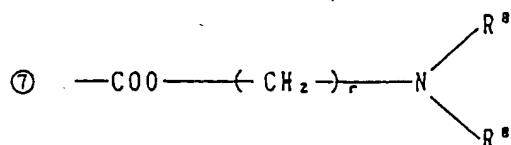


wherein p is an integral number of 1 to 10; q is 0 or an integral number of 1 to 100; r and s are, independently, an integral number of 1 to 3; t and u are, independently, an integral number of 1 to 100; A<sup>1</sup> is a divalent or trivalent ring-opened group of an alkyleneimine of 2 to 4 carbon atoms (in a case of a divalent group, A<sup>1</sup> is a straight chain type and, in a case of a trivalent group, A<sup>1</sup> is a branched type); R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>8</sup> denotes CH<sub>3</sub> or C<sub>2</sub>H<sub>5</sub>; R<sup>9</sup> denotes H, CH<sub>3</sub>, or C<sub>2</sub>H<sub>5</sub>; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; X<sup>⊖</sup> denotes an anionic pair ion; when p is two or more, each A<sup>1</sup> group may be identical or different and their arrangement may be regular or irregular; when q is not 0, the arrangement of A<sup>1</sup> and R<sup>5</sup>O may be normal or reversed and may be regular or irregular; when q is 2 or more, t is 2 or more, and u is 2 or more, respectively, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; and when a group denoted by the same symbol is present two or more times, all these groups do not need to be identical.


3. A cement additive as claimed in either one of Claims 1 and 2, in which said crosslinked polymer has viscosity of 100 Nsm<sup>-2</sup> or less in a 20% by weight aqueous solution or in a dispersing state in water when at a temperature of 20°C.
4. A method for producing a cement additive as claimed in Claim 1, said method comprising obtaining a crosslinked polymer by combining water-soluble polymers of molecular weight 500 to 100,000 to one another by using a crosslinking agent which has and/or is capable of forming a structural unit wherein at least one group selected from the divalent groups formula (I) is present:






wherein R<sup>1</sup> and R<sup>2</sup> independently denote any one of the following groups:



R and R<sup>1</sup> independently denote an alkyl group of carbon number of 1 to 5 with the proviso that where R<sup>2</sup> is a group










then group R<sup>1</sup> may be present or absent, and wherein the water-soluble polymer has at least one kind of functional group selected from the following groups 1 to 5:



wherein m is 0 or an integral number of 1 to 50; n is 0 or 1; M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>5</sup> and R<sup>6</sup> independently denote an alkylene group of carbon number 2 to 4; R<sup>7</sup> denotes an alkylene group of carbon number 1 to 5; when m is 2 or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular.

5. A method for producing a cement additive as claimed in Claim 4, in which the water-soluble polymer additionally has at least one kind of functional group selected from the following groups 6 to 12:




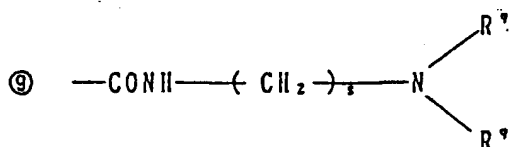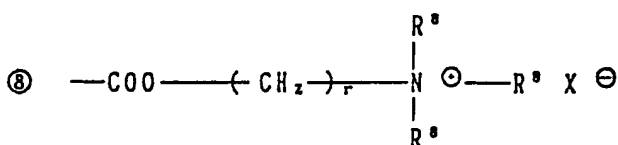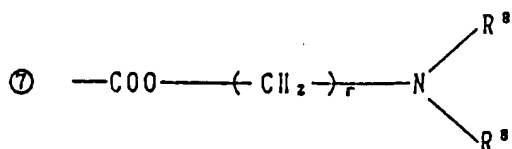

wherein p is an integral number of 1 to 10; q is 0 or an integral number of 1 to 100; r and s are, independently, an integral number of 1 to 3; t and u are, independently, an integral number of 1 to 100; A<sup>1</sup> is a divalent or trivalent ring-opened group of an alkyleneimine of 2 to 4 carbon atoms (in a case of a divalent group, A<sup>1</sup> is a straight chain type and, in a case of a trivalent group, A<sup>1</sup> is a branched type); R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>8</sup> denotes CH<sub>3</sub> or C<sub>2</sub>H<sub>5</sub>; R<sup>9</sup> denotes H, CH<sub>3</sub>, or C<sub>2</sub>H<sub>5</sub>; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; X<sup>⊖</sup> denotes an anionic pair ion; when p is two or more, each A<sup>1</sup> group may be identical or different and their arrangement may be regular or irregular; when q is not 0, the arrangement of A<sup>1</sup> and R<sup>5</sup>O may be normal or reversed and may be regular or irregular; when q is 2 or more, t is 2 or more, and u is 2 or more, respectively, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; when a group denoted by the same symbol is present two or more times, all these groups do not need to be identical.

6. A method for producing a cement additive as claimed in Claim 5, which comprises producing a crosslinked polymer by reaction of a water-soluble polymer and a crosslinking agent, wherein the water-soluble polymer is derived from a monomer


(xiv)



wherein u is an integral number of 1 to 100; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; and when u is 2 or

more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; in the range of 1 to 99.9% by weight and a monomer


(i)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; in the range of 99 to 0.1% by weight, the total of (x iv) and (i) monomers being 100% by weight; wherein the crosslinking agent has a functional group capable of reacting with a carboxyl group and/or a sulfonate group and/or a hydroxyl group being contained in the water-soluble polymer, and the crosslinking agent and the water-soluble polymer are used in a range of 0.001 to 1.0 in the molar ratio between a functional group of the agent and a functional group of the polymer.


7. A method for producing a cement additive as claimed in Claim 4, which comprises producing a crosslinked polymer by reaction of a water-soluble polymer and a cross-linking agent, wherein the water-soluble polymer is derived from a monomer

(iv)

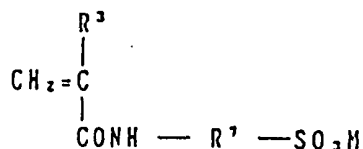

wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>7</sup> denotes an alkylene group or carbon number of 1 to 5; in the range of 1 to 99% by weight and a monomer

(i)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; in a range of 1 to 99% by weight, the total of (iv) and (i) monomers being 100% by weight; wherein the crosslinking agent has a functional group capable of reacting with a carboxyl group and/or a sulfonate group being contained in the water-soluble polymer, and the crosslinking agent and water-soluble polymer are used in a range of 0.001 to 1.0 in the molar ratio between a functional group of the agent and a functional group of the polymer.

8. A method for producing a cement additive as claimed in Claim 5, which comprises producing a crosslinked polymer by reaction of a water-soluble polymer and a crosslinking agent, wherein the water-soluble polymer is derived from a monomer


(iv)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>7</sup> denotes an alkylene group of carbon number of 1 to 5;

in the range of 1 to 98% by weight, and a monomer


(i)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>;

in the range of 1 to 98% by weight, and a monomer


(xiv)

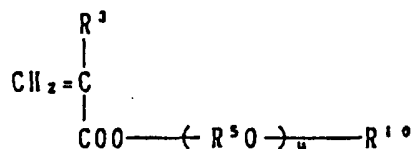

wherein u is an integral number of 1 to 100; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; and when u is 2 or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; in the range of 1 to 70% by weight, the total of (iv), (i), and (xiv) being 100% by weight, and the crosslinking agent has a functional group capable of reacting with a carboxyl group and/or a sulfonate group and/or a hydroxyl group being contained in the water-soluble polymer, and the crosslinking agent and water-soluble polymer are used in a range of 0.001 to 1.0 in the molar ratio between a functional group of the agent and a functional group of the polymer.

9. A method for producing a cement additive as claimed in Claim 4, which comprises producing a crosslinked polymer by reaction of a water-soluble polymer and a crosslinking agent, wherein the water-soluble polymer is derived from a monomer


(iii)

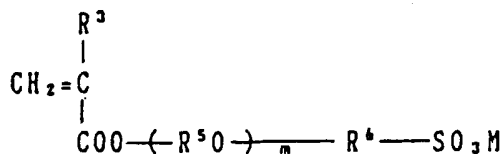

wherein m is 0 or an integral number of 1 to 50; M denotes any one of a hydrogen atom, a mono-, di-, or trivalent metal, an ammonium group, or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> and R<sup>6</sup> independently denote an alkylene group of carbon number 2 to 4; when m is two or more, each R<sup>5</sup>O

group may be identical or different and their arrangement may be regular or irregular;  
in the range of 1 to 99% by weight and a monomer


(i)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>;  
in a range of 1 to 99% by weight, the total of (iii) and (i) being 100% by weight, and the crosslinking agent has a functional group capable of reacting with a carboxyl group and/or a sulfonate group being contained in the water-soluble polymer, and the crosslinking agent and water-soluble polymer are used in a range of 0.001 to 1.0 in the molar ratio between a functional group of the agent and a functional group of the polymer.


10. A method for producing a cement additive as claimed in Claim 5, which comprises producing a crosslinked polymer by reaction of a water-soluble polymer and a crosslinking agent, wherein the water-soluble polymer is derived from a monomer

(iii)

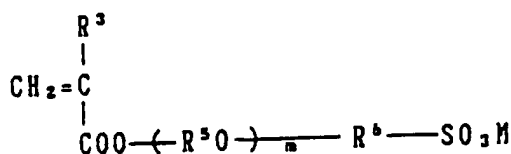


wherein m is 0 or an integral number of 1 to 50; M denotes any one of a hydrogen atom, a mono-, di-, or trivalent metal, an ammonium group, or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> and R<sup>6</sup> independently denote an alkylene group of carbon number 2 to 4; when m is two or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular;  
in the range of 1 to 98% by weight,

(i)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>;  
in a range of 1 to 98% by weight, and a monomer


(xiv)




wherein u is an integral number of 1 to 100; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; and when u is 2 or

more, each  $R^5O$  group may be identical or different and their arrangement may be regular or irregular; in a range of 1 to 70% by weight, the total of (iii), (i), and (xiv) being 100% by weight, and the crosslinking agent has a functional group capable of reacting with a carboxyl group and/or a sulfonate group and/or a hydroxyl group being contained in the water-soluble polymer, and the crosslinking agent and water-soluble polymer are used in a range of 0.001 to 1.0 in the molar ratio between a functional group of the agent and a functional group of the polymer.


11. A method for producing a cement additive as claimed in any one of Claims 4 to 10, in which the crosslinking agent has a molecular weight of 100 to 5,000.
12. A method for producing a cement additive as claimed in Claim 11, in which the crosslinked polymer has viscosity of  $100\text{Nsm}^{-2}$  or less in a 20% by weight aqueous solution or a state of dispersing-in-water at  $20^\circ\text{C}$ .
13. A method for producing a cement additive as claimed in Claim 1, said method comprising obtaining a crosslinked polymer by a polymerization reaction of a monomer (e), which has two or more polymerizable double bonds and has as a structural unit at least one group selected from the divalent groups of formula (I)




wherein  $R^1$  and  $R^2$  independently denote any one of the following groups:



$R$  and  $R'$  independently denote an alkyl group of carbon number of 1 to 5; with the proviso that where  $R^2$  is a group




then group  $R^1$  may be present or absent; located between the double bonds, with the monomer (f), which has one polymerizable double bond capable of copolymerizing with the double bond in (e) and is able to form a main chain structure capable of leading to a water-soluble polymer of a molecular weight of 500 or more to 100,000 or less; and wherein the water-soluble polymer has at least one kind of functional group selected from the following groups 1 to 5:

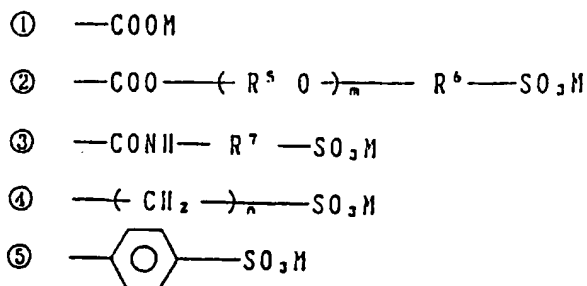

wherein m is 0 or an integral number of 1 to 50; n is 0 or 1; M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>5</sup> and R<sup>6</sup> independently denote an alkylene group of 2 to 4 carbon atoms; R<sup>7</sup> denotes an alkylene group of 1 to 5 carbon atoms; when m is 2 or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular.

14. A method for producing a cement additive as claimed in Claim 13, in which the water-soluble polymer additionally has at least one kind of functional group selected from the groups 1 to 5 and at least one kind of functional group selected from the following groups of 6 to 12:

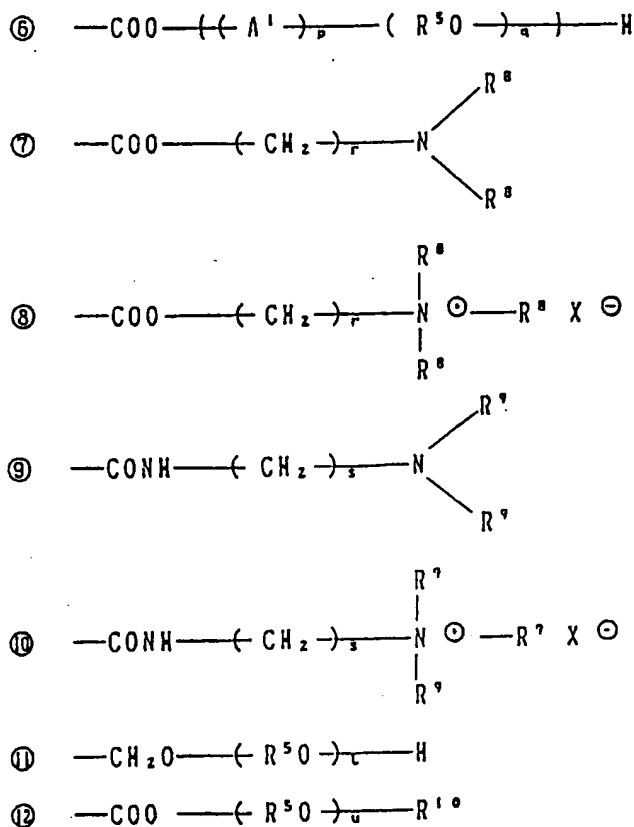


wherein p is an integral number of 1 to 10; q is 0 or an integral number of 1 to 100; r and s are, independently, an integral number of 1 to 3; t and u are, independently, an integral number of 1 to 100; A<sup>1</sup> is a divalent or trivalent ring-opened group of an alkyleneimine of 2 to 4 carbon atoms (in a case of a divalent group, A<sup>1</sup> is a straight chain type and, in a case of a trivalent group, A<sup>1</sup> is a branched type); R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>8</sup> denotes CH<sub>3</sub> or C<sub>2</sub>H<sub>5</sub>; R<sup>9</sup> denotes H, CH<sub>3</sub>,

or C<sub>2</sub>H<sub>5</sub>; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; X<sup>9</sup> denotes an anionic pair ion; when p is two or more, each A<sup>1</sup> group may be identical or different and their arrangement may be regular or irregular; when q is not 0, the arrangement of A<sup>1</sup> and R<sup>5</sup>O may be normal or reversed and may be regular or irregular; when q is 2 or more, t is 2 or more, and u is 2 or more, respectively, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; and when a group denoted by the same symbol is present two or more times, all the groups do not need to be identical.


15. A method for producing a cement additive as claimed in Claim 14, which comprises producing a crosslinked polymer by reaction of a monomer (e) in the range of 0.1 to 50% by weight, monomer

(xiv)



wherein u is an integral number of 1 to 100; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; and when u is 2 or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; in a range of 1 to 98.9% by weight, and a monomer

(i)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; in a range of 1 to 98.9% by weight, the total of (e), (xiv) and (i) being 100% by weight.


16. A method for producing a cement additive as claimed in Claim 13, which comprises the step of obtaining a crosslinked polymer by using a monomer (e), a monomer

(iv)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>7</sup> denotes an alkylene group of carbon number of 1 to 5; and a monomer


(i)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group;  $R^3$  denotes H or  $CH_3$ ; in a ratio of 0.1 to 50% by weight of monomer (e), 1 to 98.9% by weight of the monomer (iv), and 1 to 98.9% by weight of the monomer (i), the total of (e), (iv), and (i) being 100% by weight.


17. A method for producing a cement additive as claimed in Claim 14, which comprises the step of obtaining a crosslinked polymer by using a monomer (e), a monomer

(xiv)




wherein u is an integral number of 1 to 100;  $R^3$  denotes H or  $CH_3$ ;  $R^5$  denotes an alkylene group of carbon number 2 to 4;  $R^{10}$  denotes H or an alkyl group of carbon number 1 to 5; and when u is 2 or more, each  $R^5O$  group may be identical or different and their arrangement may be regular or irregular; a monomer

(iv)



wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group;  $R^3$  denotes H or  $CH_3$ ;  $R^7$  denotes an alkylene group of carbon number 1 to 5; and a monomer

(i)




wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group;  $R^3$  denotes H or  $CH_3$ ; in a ratio of 0.1 to 50% by weight of the monomer (e), 1 to 70% by weight of monomer (xiv), 1 to 97.9% by weight of monomer (iv), and 1 to 97.9% by weight of monomer (i), the total of (e), (xiv), (iv), and (i) being 100% by weight.

18. A method for producing a cement additive as claimed in Claim 13, which comprises the step of obtaining a crosslinked polymer by using a monomer (e), a monomer



(iii)

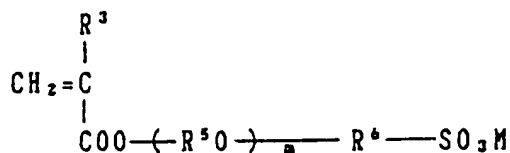


5

10

wherein m is 0 or an integral number of 1 to 50; M denotes any one of a hydrogen atom, a mono-, di-, or trivalent metal, an ammonium group, or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> and R<sup>6</sup> independently denote an alkylene group of carbon number 2 to 4; when m is two or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; and a monomer

(i).

15



20


wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; in a ratio of 0.1 to 50% by weight of monomer (e), 1 to 98.9% by weight of monomer (iii), and 1 to 98.9% by weight of monomer (i), the total of (e), (iii), and (i) being 100% by weight.

25

19. A method for producing a cement additive as claimed in Claim 14, which comprises the step of obtaining a crosslinked polymer by using a monomer (e), a monomer

(xiv)

30




35

wherein u is an integral number of 1 to 100; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> denotes an alkylene group of carbon number 2 to 4; R<sup>10</sup> denotes H or an alkyl group of carbon number 1 to 5; and when u is 2 or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; a monomer

40

(iii)

45

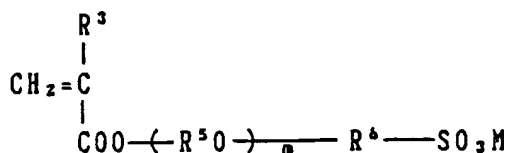


50

wherein m is 0 or an integral number of 1 to 50; M denotes any one of a hydrogen atom, a mono-, di-, or trivalent metal, an ammonium group, or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>; R<sup>5</sup> and R<sup>6</sup> independently denote an alkylene group of carbon number 2 to 4; when m is two or more, each R<sup>5</sup>O group may be identical or different and their arrangement may be regular or irregular; and a monomer

55


(i)




- wherein M denotes any one of a hydrogen atom or a monovalent, divalent, or trivalent metal group, or an ammonium group or an organic amine group; R<sup>3</sup> denotes H or CH<sub>3</sub>;
- in a ratio of 0.1 to 50% by weight of monomer (e), 1 to 70% by weight of monomer (xiv) in a series of (poly)alkyleneglycol mono(meth)acrylates, 1 to 97.9% by weight of monomer (iii), and 1 to 97.9% by weight of monomer (i), the total of (e), (xiv), (iii), and (i) being 100% by weight.
20. A method for producing a cement additive as claimed in any one of Claims 13 to 19, in which the monomer (e) is at least one kind of group selected from the following groups 1 to 5:
1. a product from a reaction of at least one compound selected from monoester diols and polyester polyols, together with a polymerizable monomer having a functional group capable of reacting with a hydroxy group in the above ols;
  2. a product from a reaction of at least one compound selected from monoester dicarboxylic acids and polyester polycarboxylic acids, together with a polymerizable monomer having a functional group capable of reacting with a carboxyl group in the above acids;
  3. a product from a reaction of at least one compound selected from polyols and polyepoxy compounds, together with a polymerizable monomer having a carboxyl group separated from a polymerizable double bond by at least one carbon atom;
  4. a product from a reaction of at least one compound selected from the polycarboxylic acid together with a polymerizable monomer having a hydroxyl group or an epoxy group separated from a polymerizable double bond by at least one carbon atom;
  5. a product from a reaction of at least one compound selected from monoester polyepoxy compounds and polyester polyepoxy compounds having a functional group capable of reacting with the epoxy group in the polyoxy compounds.
21. A method for producing a cement additive as claimed in any one of Claims 13 to 20, in which the crosslinked polymer has viscosity of 100 Nsm<sup>-2</sup> or less in a 20% by weight aqueous solution or in a dispersing state in water when at a temperature of 20 °C.
22. A cement composition, in which the cement additive as claimed in Claim 1, cement, and water are essential components.
23. A cement composition, in which the cement additive obtained from the production methods as claimed in Claim 4 or 13, cement, and water are essential components.

#### Patentansprüche


1. Zementadditiv, das aus einem vernetzten Polymer besteht, bei welchem eine Bindung zwischen Hauptketten mit einer wasserlöslichen Polymerstruktur mit einem Molekulargewicht von 500 bis 100.000 gebildet ist und bei welchem diese Bindung eine strukturelle Einheit mit wenigstens einer Gruppe aufweist, ausgewählt aus bivalenten Gruppen der Formel (I)



- worin R<sup>1</sup> und R<sup>2</sup> unabhängig voneinander irgendeine der folgenden Gruppen angeben:



R und R' unabhängig voneinander eine Alkylgruppe der Kohlenstoffzahl 1 bis 5 angeben; mit der Bedingung, daß wo R<sup>2</sup> eine Gruppe





ist, die Gruppe R' vorhanden oder abwesend sein kann; und wobei die Hauptketten wenigstens eine Funktionalgruppe aufweisen, ausgewählt aus den folgenden Gruppen 1 bis 5:

- ①  $-COOH$
- ②  $-COO-(R^5O)_m-R^6-SO_3H$
- ③  $-CONH-R^7-SO_3H$
- ④  $-(CH_2)_n-SO_3H$
- ⑤  $-\text{C}_6\text{H}_4-SO_3H$

worin m = 0 oder eine ganze Zahl von 1 bis 50; n = 0 oder 1; M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe; R<sup>5</sup> und R<sup>6</sup> unabhängig voneinander eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angeben; R<sup>7</sup> eine Alkylengruppe der Kohlenstoffzahl 1 bis 5 angibt; und wenn m = 2 oder mehr, jede R<sup>5</sup>O Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann.

2. Zementadditiv nach Anspruch 1, bei welchem die Hauptketten zusätzlich wenigstens eine Funktionalgruppe aufweisen, ausgewählt aus den folgenden Gruppen 6 bis 12:

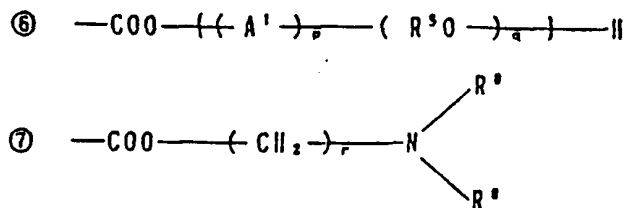

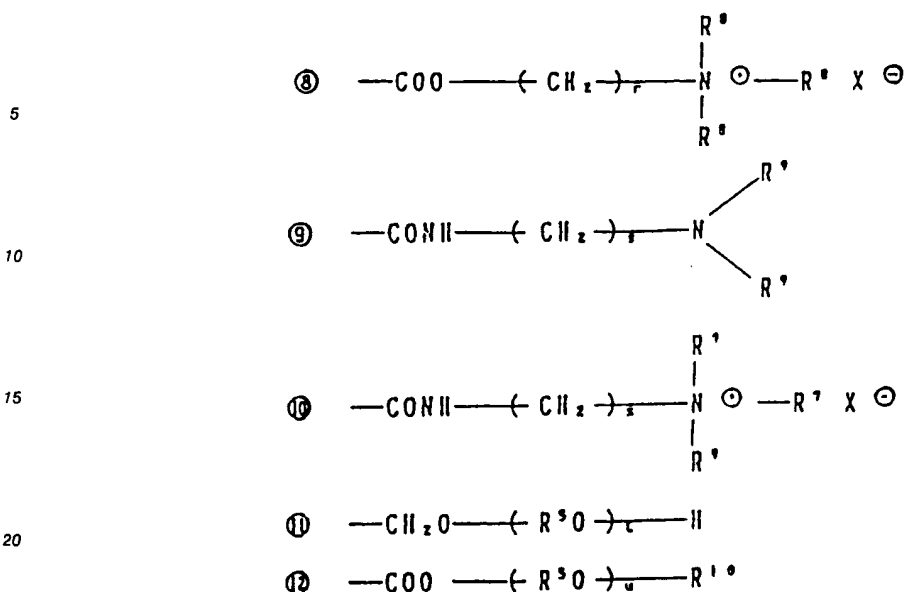


25

worin p eine ganze Zahl von 1 bis 10 ist; q = 0 oder eine ganze Zahl von 1 bis 100; r und s unabhängig voneinander eine ganze Zahl von 1 bis 3 sind; t und u unabhängig voneinander eine ganze Zahl von 1 bis 100 sind; A' eine bivalente oder trivalente ringgeöffnete Gruppe eines Alkylenimin mit 2 bis 4 Kohlenstoffatomen ist (in dem Fall einer bivalenten Gruppe ist A' ein Typ mit gerader Kette, in dem Fall einer trivalenten Gruppe ist A' ein verzweigter Typ); R<sup>5</sup> eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt; R<sup>8</sup> = CH<sub>3</sub> oder C<sub>2</sub>H<sub>5</sub>; R<sup>9</sup> = H, CH<sub>3</sub> oder C<sub>2</sub>H<sub>5</sub>; R<sup>10</sup> = H oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; X<sup>9</sup> ein anionisches Ionenpaar angibt; wobei wenn p = 2 oder mehr, jede A' Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; wenn q nicht 0 ist, die Anordnung von A' und R<sup>5</sup>O dann normal oder umgekehrt sein kann sowie regelmäßig oder unregelmäßig; wenn q = 2 oder mehr, t = 2 oder mehr und u = 2 oder mehr, dann jede R<sup>5</sup>O Gruppe gleich oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; und wenn eine mit demselben Symbol angegebene Gruppe zweimal oder mehrere Male vorhanden ist, dann alle diese Gruppen nicht notwendig identisch sein müssen.


3. Zementadditiv nach einem der Ansprüche 1 und 2, bei welchem das vernetzte Polymer eine Viskosität von 100 Nsm<sup>-2</sup> oder weniger in einer 20 Gew.-% wässrigen Lösung oder in einem dispergierenden Zustand in Wasser bei einer Temperatur von 20 °C hat.
4. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 1, wobei das Verfahren in der Bereitstellung eines vernetzten Polymers durch die Vereinigung von wasserlöslichen Polymeren mit einem Molekulargewicht von 500 bis 100.000 besteht durch Verwendung eines Vernetzungsmittels, welches eine strukturelle Einheit aufweist und/oder zur Bildung derselben fähig ist, wobei wenigstens eine Gruppe vorhanden ist, ausgewählt aus den bivalenten Gruppen der Formel (I):







worin R<sup>1</sup> und R<sup>2</sup> unabhängig voneinander eine der folgenden Gruppen angeben:



R und R' unabhängig voneinander eine Alkylgruppe der Kohlenstoffzahl 1 bis 5 angeben mit der Bedingung, daß wo R<sup>2</sup> eine Gruppe









ist, dann die Gruppe R' vorhanden oder abwesend sein kann, und wobei das wasserlösliche Polymer wenigstens eine Funktionalgruppe aufweist, ausgewählt aus den folgenden Gruppen 1 bis 5:




wobei m = 0 oder eine ganze Zahl von 1 bis 50; n = 0 oder 1; M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe; R<sup>5</sup> und R<sup>6</sup> unabhängig voneinander eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angeben; R<sup>7</sup> eine Alkylengruppe der Kohlenstoffzahl 1 bis 5 angibt; und wenn m = 2 oder mehr, dann jede R<sup>5</sup>O Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann.

5. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 4, bei welchem das wasserlösliche Polymer zusätzlich wenigstens eine Funktionalgruppe aufweist, ausgewählt aus den folgenden Gruppen 6 bis 12:

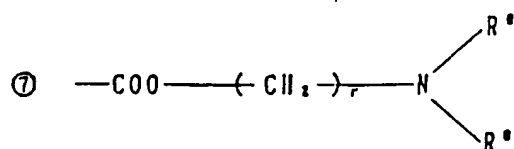


worin p eine ganze Zahl von 1 bis 10 ist; q = 0 oder eine ganze Zahl von 1 bis 100; r und s unabhängig voneinander eine ganze Zahl von 1 bis 3 sind; t und u unabhängig voneinander eine ganze Zahl von 1 bis 100 sind; A<sup>1</sup> eine bivalente oder trivalente ringgeöffnete Gruppe eines Alkylenimin mit 2 bis 4 Kohlenstoffatomen ist (in dem Fall einer bivalenten Gruppe ist A<sup>1</sup> ein Typ mit gerader Kette, in dem Fall einer trivalenten Gruppe ist A<sup>1</sup> ein verzweigter Typ); R<sup>5</sup> eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt; R<sup>8</sup> = CH<sub>3</sub> oder C<sub>2</sub>H<sub>5</sub>; R<sup>9</sup> = H, CH<sub>3</sub> oder C<sub>2</sub>H<sub>5</sub>; R<sup>10</sup> = H oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; X<sup>9</sup> ein anionisches Ionenpaar angibt; wobei wenn p = 2 oder mehr, jede A<sup>1</sup> Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; wenn q nicht 0 ist, die Anordnung von A<sup>1</sup> und R<sup>5</sup>O dann normal oder umgekehrt sein kann sowie regelmäßig oder unregelmäßig; wenn q = 2 oder mehr, t = 2 oder mehr und u = 2 oder mehr, dann jede R<sup>5</sup>O Gruppe gleich oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; und wenn eine mit demselben Symbol angegebene Gruppe zweimal oder mehrere Male vorhanden ist, dann alle diese Gruppen nicht notwendig identisch sein müssen.

6. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 5, welches die Herstellung eines vernetzten Polymers durch die Reaktion eines wasserlöslichen Polymers und eines Vernetzungsmittels umfaßt, wobei das wasserlösliche Polymer abgeleitet ist aus einem Monomer (xiv)



wob i u eine ganze Zahl von 1 bis 100 ist; R<sup>3</sup> = H oder CH<sub>3</sub>; R<sup>5</sup> eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt; R<sup>10</sup> = H oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; und wenn u

= 2 oder mehr, dann jede R<sup>5</sup>O Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann;  
in dem Bereich von 1 bis 99.9 Gew.-%, und einem Monomer (i)




wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe; R<sup>3</sup> = H oder CH<sub>3</sub>;  
in dem Bereich von 99 bis 0.1 Gew.-%, wobei die Gesamtheit der Monomere (xiv) und (i) 100 Gew.-% beträgt; wobei das Vernetzungsmittel eine Funktionalgruppe aufweist, die zu einer Reaktion mit einer Carboxylgruppe und/oder einer Sulfonatgruppe und/oder einer Hydroxylgruppe fähig ist, welche in dem wasserlöslichen Polymer enthalten sind, und wobei das Vernetzungsmittel und das wasserlösliche Polymer in einem Bereich von 0.001 bis 1.0 des molaren Verhältnisses zwischen einer Funktionalgruppe des Mittels und einer Funktionalgruppe des Polymers verwendet werden.

7. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 4, welches die Herstellung eines vernetzten Polymers durch die Reaktion eines wasserlöslichen Polymers und eines Vernetzungsmittels umfaßt, wobei das wasserlösliche Polymer abgeleitet ist von einem Monomer (iv)



wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe; R<sup>3</sup> = H oder CH<sub>3</sub>; R<sup>7</sup> eine Alkylengruppe der Kohlenstoffzahl 1 bis 5 angibt;  
in dem Bereich von 1 bis 99 Gew.-%, und einem Monomer (i)




wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe; R<sup>3</sup> = H oder CH<sub>3</sub>;  
in dem Bereich von 1 bis 99 Gew.-%, wobei die Gesamtheit der Monomere (iv) und (i) 100 Gew.-% beträgt; wobei das Vernetzungsmittel eine Funktionalgruppe aufweist, die zur Reaktion einer Carboxylgruppe und/oder einer Sulfonatgruppe fähig ist, die in dem wasserlöslichen Polymer enthalten sind, und das Vernetzungsmittel und das wasserlösliche Polymer in einem Bereich von 0.001 bis 1.0 des molaren Verhältnisses zwischen einer Funktionalgruppe des Mittels und einer Funktionalgruppe des Polymers verwendet werden.


8. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 5, welches die Herstellung eines vernetzten Polymers durch die Reaktion eines wasserlöslichen Polymers und eines Vernetzungsmittels umfaßt, wobei das wasserlösliche Polymer abgeleitet ist aus einem Monomer (iv)



wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angeben oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ;  $R^7$  eine Alkylengruppe der Kohlenstoffzahl 1 bis 5 angibt; in dem Bereich von 1 bis 98 Gew.-%, und einem Monomer (i)




wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in dem Bereich von 1 bis 98 Gew.-%, und einem Monomer (xiv)




wobei u eine ganze Zahl von 1 bis 100 ist;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt;  $R^{10} = H$  oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; und wenn u = 2 oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; in dem Bereich von 1 bis 70 Gew.-%, wobei die Gesamtheit von (iv) und (i) und (xiv) 100 Gew.-% beträgt und das Vernetzungsmittel eine Funktionalgruppe aufweist, die zur Reaktion mit einer Carboxylgruppe und/oder einer Sulfonatgruppe und/oder einer Hydroxylgruppe fähig ist, die in dem wasserlöslichen Polymer enthalten sind, und das Vernetzungsmittel und das wasserlösliche Polymer in einem Bereich von 0.001 bis 1.0 des molaren Verhältnisses zwischen einer Funktionalgruppe des Mittels und einer Funktionalgruppe des Polymers verwendet werden.

9. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 4, welches die Herstellung eines vernetzten Polymers durch die Reaktion eines wasserlöslichen Polymers und eines Vernetzungsmittels umfaßt, wobei das wasserlösliche Polymer abgeleitet ist von einem Monomer (iii)

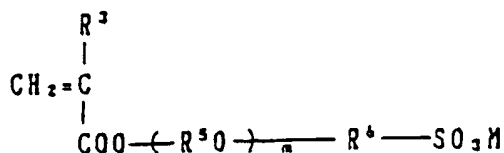

worin m = 0 oder eine ganze Zahl von 1 bis 50; M beliebig ein Wasserstoffatom, ein mono-, bi- oder trivalentes Metall angibt, sowie eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  und  $R^6$  unabhängig voneinander eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angeben; und wenn m = 2 oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; in dem Bereich von 1 bis 99 Gew.-%, und ein Monomer (i)






5

wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angeben oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in einem Bereich von 1 bis 99 Gew.-%, wobei die Gesamtheit von (iii) und (i) 100 Gew.-% beträgt und das Vernetzungsmittel eine Funktionalgruppe aufweist, die zur Reaktion mit einer Carboxylgruppe und/oder einer Sulfonatgruppe fähig ist, welche in dem wasserlöslichen Polymer enthalten sind, und das Vernetzungsmittel und das wasserlösliche Polymer in einem Bereich von 0.001 bis 1.0 des molaren Verhältnisses zwischen einer Funktionalgruppe des Mittels und einer Funktionalgruppe des Polymers verwendet werden.

15 10. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 5, welches die Herstellung eines vernetzten Polymers durch die Reaktion eines wasserlöslichen Polymers und eines Vernetzungsmittels umfaßt, wobei das wasserlösliche Polymer abgeleitet ist aus einem Monomer (iii)


20

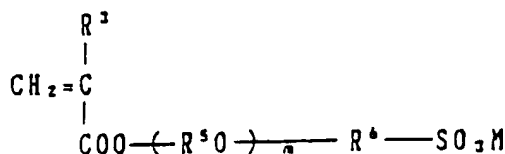

25


wobei  $m = 0$  oder eine ganze Zahl von 1 bis 50; M beliebig ein Wasserstoffatom, ein mono-, bi- oder trivalentes Metall sowie eine Ammoniumgruppe oder eine organische Amingruppe angibt;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  und  $R^6$  unabhängig voneinander eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angeben, und wenn  $m = 2$  oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; in dem Bereich von 1 bis 98 Gew.-%, und einem Monomer (i)

35



wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angeben oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in einem Bereich von 1 bis 98 Gew.-%, und einem Monomer (xiv)

45



50 wobei u eine ganze Zahl von 1 bis 100 ist;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt;  $R^{10} = H$  oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; und wenn u = 2 oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; in einem Bereich von 1 bis 70 Gew.-%, wobei die Gesamtheit von (iii), (i) und (xiv) 100 Gew.-% beträgt und das Vernetzungsmittel eine Funktionalgruppe aufweist, die zur Reaktion mit einer Carboxylgruppe und/oder einer Sulfonatgruppe und/oder einer Hydroxylgruppe fähig ist, welche in dem wasserlöslichen Polymer enthalten sind, und das Vernetzungsmittel und das wasserlösliche Polymer in einem Bereich von 0.001 bis 1.0 des molaren Verhältnisses zwischen einer Funktionalgruppe des Mittels und einer


55

Funktionalgruppe des Polymers verwendet werden.


11. Verfahren zur Herstellung eines Zementadditivs nach einem der Ansprüche 4 bis 10, bei welchem das Vernetzungsmittel ein Molekulargewicht von 100 bis 5.000 hat.

12. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 11, bei welchem das Vernetzungsmittel eine Viskosität von  $100 \text{ Nsm}^{-2}$  oder weniger in einer 20 Gew.-% wässrigen Lösung oder in einem dispergierenden Zustand in Wasser bei  $20^\circ\text{C}$  hat.


13. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 1, wobei das Verfahren die Bereitstellung eines vernetzten Polymers durch eine Polymerisationsreaktion eines Monomers (e) umfaßt, welches zwei oder mehr polymerisierbare Doppelbindungen hat sowie eine strukturelle Einheit mit wenigstens einer Gruppe, ausgewählt aus den bivalenten Gruppen der Formel (I)



wobei  $R^1$  und  $R^2$  unabhängig voneinander beliebig eine der folgenden Gruppen angeben:



$R$  und  $R'$  unabhängig voneinander eine Alkylgruppe der Kohlenstoffzahl 1 bis 5 angeben; mit der Bedingung, daß wo  $R^2$  eine Gruppe










ist, dann die Gruppe  $R^1$  vorhanden oder abwesend sein kann; angeordnet zwischen den Doppelbindungen, mit dem Monomer (f), welches eine polymerisierbare Doppelbindung aufweist, die zur Copolymerisation mit der Doppelbindung in (e) fähig ist und eine Hauptkettenstruktur bilden kann, die zur Ausbildung eines wasserlöslichen Polymers mit einem Molekulargewicht von 500 oder mehr bis 100.000 oder weniger fähig ist; und wobei das wasserlösliche Polymer wenigstens eine Funktionalgruppe aufweist, ausgewählt aus den folgenden Gruppen 1 bis 5:

- ①  $-COOH$
- ②  $-COO-(R^5-O)_m-R^6-SO_3M$
- ③  $-CONH-R^7-SO_3M$
- ④  $-(CH_2)_n-SO_3M$
- ⑤  $\text{---} \text{C}_6\text{H}_4 \text{---} SO_3M$

worin  $m = 0$  oder eine ganze Zahl von 1 bis 50;  $n = 0$  oder 1;  $M$  beliebig ein Wasserstoffatom, ein monovalente, bivalent oder trivalente  $M$  tallgruppe angibt, oder eine Ammoniumgruppe oder eine


organische Amingruppe;  $R^5$  und  $R^6$  unabhängig voneinander eine Alkylengruppe mit 2 bis 4 Kohlenstoffatomen angeben;  $R^7$  eine Alkylengruppe mit 1 bis 5 Kohlenstoffatomen angibt; und wenn  $m = 2$  oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann.

14. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 13, bei welchem das wasserlösliche Polymer zusätzlich wenigstens eine Funktionalgruppe aufweist, ausgewählt aus den Gruppen 1 bis 5, und wenigstens eine Funktionalgruppe, ausgewählt aus den folgenden Gruppen 6 bis 12;




worin  $p$  eine ganze Zahl von 1 bis 10 ist;  $q = 0$  oder eine ganze Zahl von 1 bis 100;  $r$  und  $s$  unabhängig voneinander eine ganze Zahl von 1 bis 3 sind;  $t$  und  $u$  unabhängig voneinander eine ganze Zahl von 1 bis 100 sind;  $A'$  eine bivalente oder trivalente ringgeöffnete Gruppe eines Alkylens mit 2 bis 4 Kohlenstoffatomen ist (in dem Fall einer bivalenten Gruppe ist  $A'$  ein Typ mit gerader Kette, in dem Fall einer trivalenten Gruppe ist  $A'$  ein verzweigter Typ);  $R^5$  eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt;  $R^8 = \text{CH}_3$  oder  $\text{C}_2\text{H}_5$ ;  $R^9 = \text{H}$ ,  $\text{CH}_3$  oder  $\text{C}_2\text{H}_5$ ;  $R^{10} = \text{H}$  oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5;  $X^-$  ein anionisches Ionenpaar angibt; wobei wenn  $p = 2$  oder mehr, jede  $A'$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; wenn  $q$  nicht 0 ist, die Anordnung von  $A'$  und  $R^5O$  dann normal oder umgekehrt sein kann sowie regelmäßig oder unregelmäßig; wenn  $q = 2$  oder mehr,  $t = 2$  oder mehr und  $u = 2$  oder mehr, dann jede  $R^5O$  Gruppe gleich oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; und wenn eine mit demselben Symbol angegebene Gruppe zweimal oder mehrere Male vorhanden ist, dann alle diese Gruppen nicht notwendig identisch sein müssen.

15. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 14, welches die Herstellung eines Polymeren durch die Reaktion eines Monomers (e) in dem Bereich von 0.1 bis 50 Gew.-% umfaßt, das Monomer (xiv)

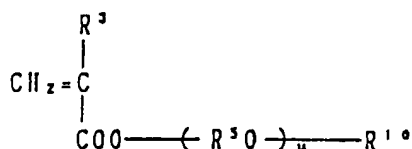


wobei u eine ganze Zahl von 1 bis 100 ist;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt;  $R^{10} = H$  oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; und wenn  $u = 2$  oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; in dem Bereich von 1 bis 98.9 Gew.-%, und ein Monomer (i)




wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in einem Bereich von 1 bis 98.9 Gew.-%, wobei die Gesamtheit von (e), (xiv) und (i) 100 Gew.-% beträgt.

16. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 13, welches die Stufe der Bereitstellung eines vernetzten Polymers durch die Verwendung eines Monomers (e) umfaßt, eines Monomers (iv)

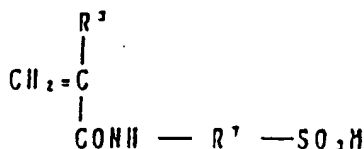


wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ;  $R^7$  eine Alkylengruppe der Kohlenstoffzahl 1 bis 5 angibt; und ein Monomer (i)




wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in einem Verhältnis von 0.1 bis 50 Gew.-% des Monomers (e), 1 bis 98.9 Gew.-% des Monomers (iv) und 1 bis 98.9 Gew.-% des Monomers (i), wobei die Gesamtheit von (e), (iv) und (i) 100 Gew.-% beträgt.


17. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 14, welches die Stufe der Bereitstellung eines vernetzten Polymers durch die Verwendung eines Monomers (e) umfaßt, eines Monomers (xiv)



wobei u eine ganze Zahl von 1 bis 100 ist;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt;  $R^{10} = H$  oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; und wenn u = 2 oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann;  
 5 ein Monomer (iv)




15 wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ;  $R^7$  eine Alkylengruppe der Kohlenstoffzahl 1 bis 5 angibt; und ein Monomer (i)




25 wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angibt oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in einem Verhältnis von 0.1 bis 50 Gew.-% des Monomers (e), 1 bis 70 Gew.-% des Monomers (xiv), 1 bis 97.9 Gew.-% des Monomers (iv) und 1 bis 97.9 Gew.-% des Monomers (i), wobei die Gesamtheit von (e), (xiv), (iv) und (i) 100 Gew.-% beträgt.

30 18. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 13, welches die Stufe der Bereitstellung eines vernetzten Polymers umfaßt durch die Verwendung eines Monomers (e), eines Monomers (iii)

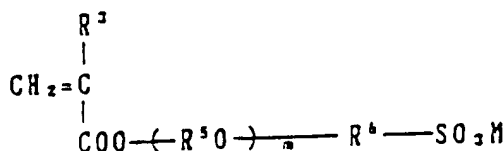


40 worin m = 0 oder eine ganze Zahl von 1 bis 50; M beliebig ein Wasserstoffatom, ein mono-, bi- oder trivalentes Metall, eine Ammoniumgruppe oder eine organische Amingruppe angibt;  $R^3 = H$  oder  $CH_3$  und  $R^5$  und  $R^6$  unabhängig voneinander eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angeben, und wenn m = 2 oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann; und ein Monomer (i)




50 wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angeben oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in einem Verhältnis von 0.1 bis 50 Gew.-% des Monomers (e), 1 bis 98.9 Gew.-% des Monomers (iii) und 1 bis 98.9 Gew.-% des Monomers (i), wobei die Gesamtheit von (e), (iii) und (i) 100 Gew.-% beträgt.

19. Verfahren zur Herstellung eines Zementadditivs nach Anspruch 14, welches die Stufe der Bereitstellung eines vernetzten Polymers umfaßt durch Verwendung eines Monomers (e), eines Monomers (xiv)




wobei u eine ganze Zahl von 1 bis 100 ist;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angibt;  $R^{10} = H$  oder eine Alkylgruppe der Kohlenstoffzahl 1 bis 5; und wenn  $u = 2$  oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann;

ein Monomer (iii)

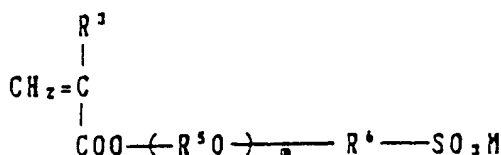

wobei  $m = 0$  oder eine ganze Zahl von 1 bis 50; M beliebig ein Wasserstoffatom, ein mono-, bi- oder trivalentes Metall, eine Ammoniumgruppe oder eine organische Amingruppe angibt;  $R^3 = H$  oder  $CH_3$ ;  $R^5$  und  $R^6$  unabhängig voneinander eine Alkylengruppe der Kohlenstoffzahl 2 bis 4 angeben; und wenn  $m = 2$  oder mehr, dann jede  $R^5O$  Gruppe identisch oder verschieden sein kann und ihre Anordnung regelmäßig oder unregelmäßig sein kann;

und ein Monomer (i)



wobei M beliebig ein Wasserstoffatom oder eine monovalente, bivalente oder trivalente Metallgruppe angeben oder eine Ammoniumgruppe oder eine organische Amingruppe;  $R^3 = H$  oder  $CH_3$ ; in einem Verhältnis von 0.1 bis 50 Gew.-% des Monomers (e), 1 bis 70 Gew.-% des Monomers (xiv) in einer Reihe von (Poly)alkylenglykol-Mono(meth)acrylaten, 1 bis 97.9 Gew.-% des Monomers (iii) und 1 bis 97.9 Gew.-% des Monomers (i), wobei die Gesamtheit von (e), (xiv), (iii) und (i) 100 Gew.-% beträgt.

20. Verfahren zur Herstellung eines Zementadditivs nach einem der Ansprüche 13 bis 19, bei welchem das Monomer (e) wenigstens eine Gruppe ist, ausgewählt aus den folgenden Gruppen 1 bis 5:

1. ein Produkt aus einer Reaktion von wenigstens einer Verbindung, ausgewählt aus den Monoesterdiolen und Polyesterpolyolen, zusammen mit einem polymerisierbaren Monomer mit einer Funktionalgruppe, die zur Reaktion mit einer Hydroxygruppe bei den vorstehenden Olen fähig ist;
2. ein Produkt aus einer Reaktion von wenigstens einer Verbindung, ausgewählt aus den Monoesterdicarboxylsäuren und Polyesterpolycarboxylsäuren, zusammen mit einem polymerisierbaren Monomer mit einer Funktionalgruppe, die zur Reaktion mit einer Carboxylgruppe bei den vorstehenden Säuren fähig ist;
3. ein Produkt aus einer Reaktion von wenigstens einer Verbindung, ausgewählt aus den Polyolen und den Polyepoxyverbindungen, zusammen mit einem polymerisierbaren Monomer mit einer Carboxylgruppe, die von einer polymerisierbaren Doppelbindung durch wenigstens ein Kohlenstoffatom getrennt ist;
4. ein Produkt aus einer Reaktion von wenigstens einer Verbindung, ausgewählt aus der Polycarboxylsäure zusammen mit einem polymerisierbaren Monomer mit einer Hydroxygruppe oder einer Epoxygruppe, die von einer polymerisierbaren Doppelbindung durch wenigstens ein Kohlenstoffatom

getrennt ist;

5. ein Produkt aus einer Reaktion von Wenigstens einer Verbindung, ausgewählt aus den Monoesterpolyepoxyverbindungen und Polyesterpolyepoxyverbindungen mit einer Funktionalgruppe, die zur Reaktion mit einer Epoxygruppe in den Polyoxyverbindungen fähig ist.

5

21. Verfahren zur Herstellung eines Zementadditivs nach einem der Ansprüche 13 bis 20, bei welchem das vernetzte Polymer eine Viskosität von  $100 \text{ Nsm}^{-2}$  oder weniger in einer 20 Gew.-% wässrigen Lösung oder in einem dispergierenden Zustand in Wasser bei einer Temperatur von  $20^\circ \text{C}$  hat.

10

22. Zementzusammensetzung, bei welcher das Zementadditiv nach Anspruch 1, Zement und Wasser die wesentlichen Komponenten sind.

23. Zementzusammensetzung, bei welcher das Zementadditiv, erhalten aus den Herstellungsverfahren der Ansprüche 4 oder 13, Zement und Wasser die wesentlichen Komponenten sind.


15

### Revendications

20


1. Adjuvant de ciment constitué par un polymère réticulé dans lequel une liaison est formée entre des chaînes principales ayant une structure de polymère soluble dans l'eau de poids moléculaire compris entre 500 et 100 000, et dans lequel ladite liaison a une unité structurelle d'au moins un groupement choisi parmi les groupements bivalents de formule (I)

25



dans laquelle  $R^1$  et  $R^2$  représentent indépendamment l'un quelconque des groupements suivants :


30

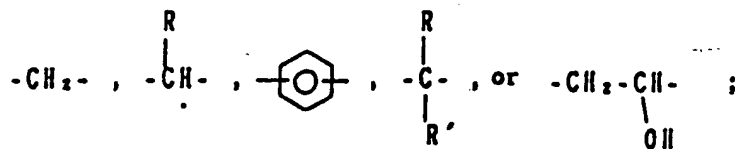

35

R et  $R'$  représentent indépendamment un groupement alkyle ayant 1 à 5 atomes de carbone, sous réserve que, si  $R^2$  est un groupement

40




45

le groupement  $R^1$  peut être alors présent ou absent ; et dans lequel lesdites chaînes principales ont au moins un type de groupement fonctionnel choisi parmi l'un des groupements 1 à 5 suivants :


50

55

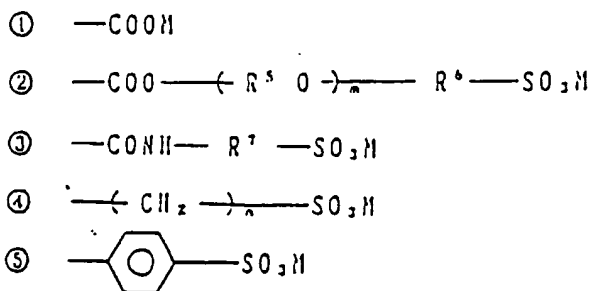

dans lesquels m est égal à 0 ou à un nombre entier de 1 à 50 ; n est égal à 0 ou à 1 ; M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>5</sup> et R<sup>6</sup> représentent indépendamment un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>7</sup> représente un groupement alkylène ayant 1 à 5 atomes de carbone ; et si m est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière.

2. Adjuvant de ciment selon la revendication 1, dans lequel lesdites chaînes principales ont, en outre, au moins un type de groupement fonctionnel choisi parmi les groupements 6 à 12 suivants :

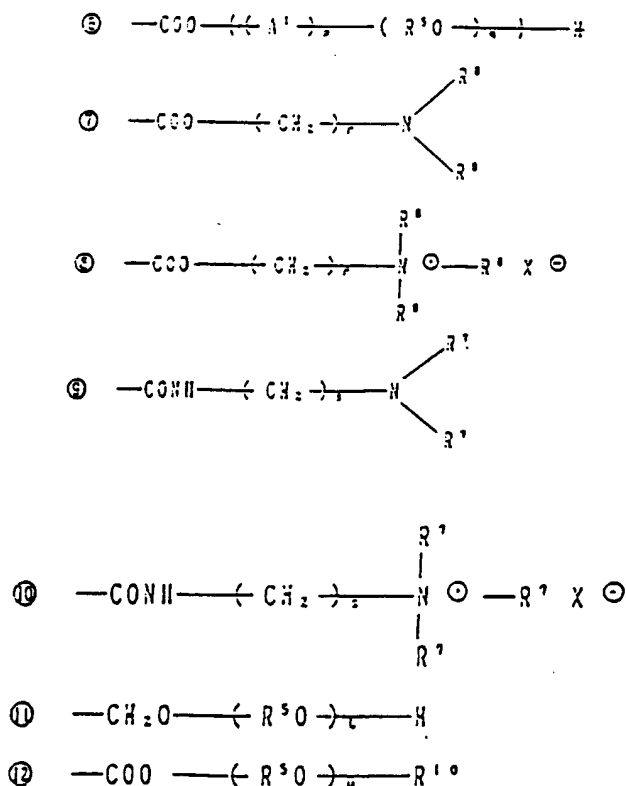


dans lesquels p est un nombre entier de 1 à 10 ; q est égal à 0 ou à un nombre entier de 1 à 100 ; r et s sont indépendamment égaux à un nombre entier de 1 à 3 ; t et u sont indépendamment égaux à un nombre entier de 1 à 100 ; A' est un groupement bivalent ou trivalent en boucle ouverte d'un alkylèneimine à 2 ou 4 atomes de carbone (dans le cas d'un groupement bivalent, A' est du type chaîne droite et dans le cas d'un groupement trivalent, A' est du type ramifié) ; R<sup>5</sup> représente un




groupement alkylène ayant 2 à 4 atomes de carbone ;  $R^8$  représente  $CH_3$  ou  $C_2H_5$  ;  $R^9$  représente H,  $CH_3$  ou  $C_2H_5$  ;  $R^{10}$  représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ;  $X^-$  représente une paire d'anions ; si p est égal ou supérieur à 2, tous les groupements  $A^1$  peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ; si q est différent de 0, la disposition de  $A^1$  et de  $R^5O$  peut être normale ou inversée et peut être régulière ou irrégulière ; si q est égal ou supérieur à 2, t est égal ou supérieur à 2 et u est égal ou supérieur à 2, respectivement, tous les groupements  $R^5O$  peuvent être identiques ou différents, et leur disposition peut être régulière ou irrégulière ; et si un groupement représenté par le même symbole est présent deux fois ou plus, tous ces groupements n'ont pas besoin d'être identiques.

3. Adjuvant de ciment selon l'une ou l'autre des revendications 1 et 2, dans lequel ledit polymère réticulé a une viscosité égale ou inférieure à  $100 \text{ Nsm}^{-2}$  dans une solution aqueuse à 20 % en poids, ou à l'état dispersé dans l'eau à une température de  $20^\circ\text{C}$ .


4. Procédé de fabrication d'un adjuvant de ciment selon la revendication 1, ledit procédé comprenant l'obtention d'un polymère réticulé en combinant entre eux des polymères solubles dans l'eau, de poids moléculaire compris entre 500 et 100 000, en utilisant un agent de réticulation possédant une unité structurale et/ou susceptible d'en former une, dans lequel est présent au moins un groupement choisi à partir de la formule (I) des groupements bivalents :







dans laquelle  $R^1$  et  $R^2$  représentent indépendamment l'un quelconque des groupements suivants :



$R$  et  $R'$  représentent indépendamment un groupement alkyle ayant 1 à 5 atomes de carbone, sous réserve que, si  $R^2$  est un groupement










le groupement  $R^1$  peut être alors présent ou absent ; et dans lequel le polymère soluble dans l'eau a au moins un type de groupement fonctionnel choisi parmi l'un des groupements 1 à 5 suivants :




dans lesquels m est égal à 0 ou à un nombre entier de 1 à 50 ; n est égal à 0 ou à 1 ; M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>5</sup> et R<sup>6</sup> représentent indépendamment un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>7</sup> représente un groupement alkylène ayant 1 à 5 atomes de carbone ; si m est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière.

5. Procédé de fabrication d'un adjuvant de ciment selon la revendication 4, dans lequel le polymère soluble dans l'eau comporte en outre au moins un type de groupement fonctionnel choisi parmi les groupements 6 à 12 suivants :

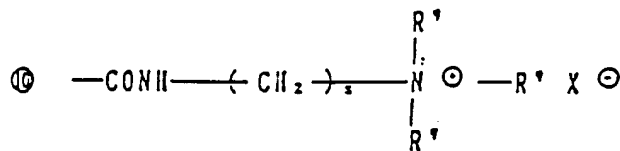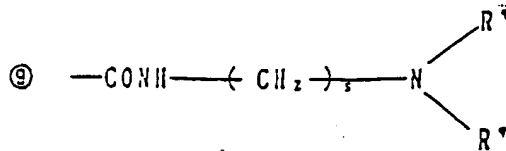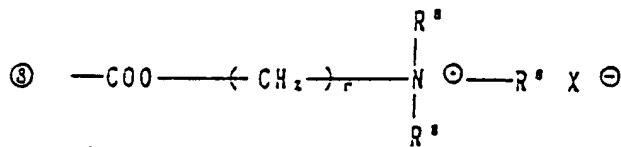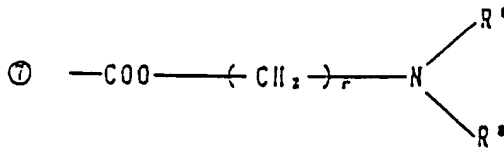


dans lesquels p est un nombre entier de 1 à 10 ; q est égal à 0 ou à un nombre entier de 1 à 100 ; r et s sont indépendamment égaux à un nombre entier de 1 à 3 ; t et u sont indépendamment égaux à un nombre entier de 1 à 100 ; A' est un groupement bivalent ou trivalent en boucle ouverte d'un alkylénimine à 2 ou 4 atomes de carbone (dans le cas d'un groupement bivalent, A' est du type chaîne droite et dans le cas d'un groupement trivalent, A' est du type ramifié) ; R<sup>5</sup> représente un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>8</sup> représente CH<sub>3</sub> ou C<sub>2</sub>H<sub>5</sub> ; R<sup>9</sup> représente H, CH<sub>3</sub> ou C<sub>2</sub>H<sub>5</sub> ; R<sup>10</sup> représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ; X<sup>-</sup> représente une paire d'anions ; si p est égal ou supérieur à 2, tous les groupements A' peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ; si q est différent de 0, la disposition de A' et de R<sup>5</sup>O peut être normale ou inversée et peut être régulière ou irrégulière ; si q est égal ou supérieur à 2, t est égal ou supérieur à 2 et u est égal ou supérieur à 2, respectivement, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ; et si un groupement représenté par le même symbole est présent deux fois ou plus, tous ces groupements n'ont pas besoin d'être identiques.

6. Procédé de fabrication d'un adjuvant de ciment selon la revendication 5, comprenant l'obtention d'un polymère réticulé par réaction d'un polymère soluble dans l'eau et d'un agent de réticulation, dans lequel le polymère soluble dans l'eau est dérivé d'un monomère (xiv)



dans lequel u est un nombre entier de 1 à 100 ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>5</sup> représente un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>10</sup> représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ; et si u est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être


identiques ou différents et leur disposition peut être régulière ou irrégulière ;  
dans la plage de 1 à 99,9 % en poids,  
et d'un monomère (i)



dans lequel M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ;


dans la plage de 99 à 0,1 % en poids, le total des monomères (xiv) et (i) constituant 100 % du poids ; dans lequel l'agent de réticulation a un groupement fonctionnel susceptible de réagir avec un groupement carboxyle et/ou un groupement sulfonate et/ou un groupement hydroxyle contenu(s) dans le polymère soluble dans l'eau, l'agent de réticulation et le polymère soluble dans l'eau étant utilisés dans une plage de 0,001 à 1,0 dans le ratio molaire entre un groupement fonctionnel de l'agent de réticulation et un groupement fonctionnel du polymère.

7. Procédé de fabrication d'un adjuvant de ciment selon la revendication 4, comprenant l'obtention d'un polymère réticulé par réaction d'un polymère soluble dans l'eau et d'un agent de réticulation, dans lequel le polymère soluble dans l'eau est dérivé d'un monomère (iv)

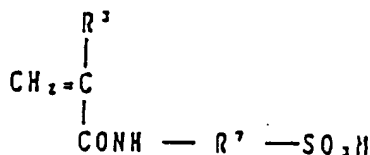

dans lequel M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>7</sup> représente un groupement alkylène ayant 1 à 5 atomes de carbone ;

dans la plage de 1 à 99 % en poids,  
et d'un monomère (i)




dans lequel M représente soit un atome d'hydrogène quelconque, soit un groupement métallique

monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $R^3$  représente H ou  $CH_3$  ;

dans une plage de 1 à 99 % en poids, le total des monomères (iv) et (i) constituant 100 % du poids ; dans lequel l'agent de réticulation a un groupement fonctionnel susceptible de réagir avec un groupement carboxyle et/ou un groupement sulfonate contenu(s) dans le polymère soluble dans l'eau, l'agent de réticulation et le polymère soluble dans l'eau étant utilisés dans une plage de 0,001 à 1,0 dans le ratio molaire entre un groupement fonctionnel de l'agent de réticulation et un groupement fonctionnel du polymère.


8. Procédé de fabrication d'un adjuvant de ciment selon la revendication 5, comprenant l'obtention d'un polymère réticulé par réaction d'un polymère soluble dans l'eau et d'un agent de réticulation, dans lequel le polymère soluble dans l'eau est dérivé d'un monomère (iv)

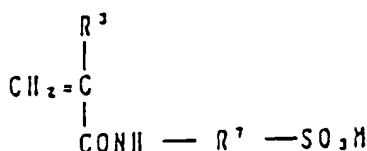

dans lequel M représente soit un atome d'hydrogène, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $R^3$  représente H ou  $CH_3$  ;  $R^7$  représente un groupement alkylène ayant 1 à 5 atomes de carbone ;

dans la plage de 1 à 98 % en poids,


et d'un monomère (i)



dans lequel M représente soit un atome d'hydrogène, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $R^3$  représente H ou  $CH_3$  ;

dans la plage de 1 à 98 % en poids,

et d'un monomère (xiv)

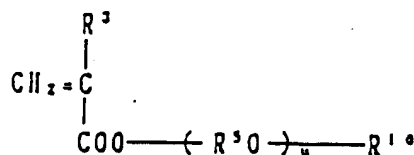


dans lequel u est un nombre entier de 1 à 100 ;  $R^3$  représente H ou  $CH_3$  ;  $R^5$  représente un groupement alkylène ayant 2 à 4 atomes de carbone ;  $R^{10}$  représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ; et si u est égal ou supérieur à 2, tous les groupements  $R^5O$  peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ;

dans la plage de 1 à 70 % en poids, le total des monomères (iv), (i) et (xiv) constituant 100 % du poids, l'agent de réticulation ayant un groupement fonctionnel susceptible de réagir avec un groupement carboxyle et/ou un groupement sulfonate et/ou un groupement hydroxyle contenu(s) dans le polymère soluble dans l'eau, l'agent de réticulation et le polymère soluble dans l'eau étant utilisés dans une plage de 0,001 à 1,0 dans le ratio molaire entre un groupement fonctionnel de l'agent de réticulation et un groupement fonctionnel du polymère.

9. Procédé de fabrication d'un adjuvant de ciment selon la revendication 4, comprenant l'obtention d'un polymère réticulé par réaction d'un polymère soluble dans l'eau et d'un agent de réticulation, dans lequel le polymère soluble dans l'eau est dérivé d'un monomère (iii)

5

10

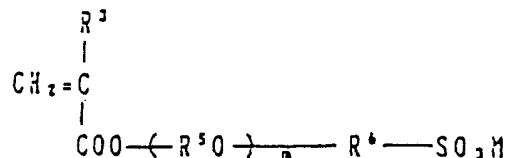


15

dans lequel m est égal à 0 ou à un nombre entier de 1 à 50 ; M représente soit un atome d'hydrogène quelconque, soit un métal monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>5</sup> et R<sup>6</sup> représentent indépendamment un groupement alkylène ayant 2 à 4 atomes de carbone ; si m est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ;

20

dans la plage de 1 à 99 % en poids,  
et d'un monomère (i)

25



30

dans lequel M représente soit un atome d'hydrogène, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ;


35

dans une plage de 1 à 99 % en poids, le total des monomères (iii) et (i) constituant 100 % du poids, l'agent de réticulation ayant un groupement fonctionnel susceptible de réagir avec un groupement carboxyle et/ou un groupement sulfonate contenu(s) dans le polymère soluble dans l'eau, l'agent de réticulation et le polymère soluble dans l'eau étant utilisés dans une plage de 0,001 à 1,0 dans le ratio molaire entre un groupement fonctionnel de l'agent de réticulation et un groupement fonctionnel du polymère.

40

10. Procédé de fabrication d'un adjuvant de ciment selon la revendication 5, comprenant l'obtention d'un polymère réticulé par réaction d'un polymère soluble dans l'eau et d'un agent de réticulation, dans lequel le polymère soluble dans l'eau est dérivé d'un monomère (iii)

45

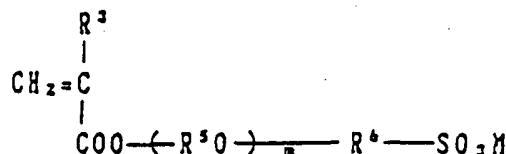


50

dans lequel m est égal à 0 ou à un nombre entier de 1 à 50 ; M représente soit un atome d'hydrogène quelconque, soit un métal monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>5</sup> et R<sup>6</sup> représentent indépendamment un groupement alkylène ayant 2 à 4 atomes de carbone ; si m est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ;

55

dans la plage de 1 à 98 % en poids,  
et d'un monomère (i)



5


le groupement  $\text{R}^1$  peut être alors présent ou absent ;

situé entre les doubles liaisons, avec le monomère (f) qui a une double liaison polymérisable susceptible de copolymérisation avec la double liaison dans (e) et qui est susceptible de former une structure de chaîne principale pouvant conduire à un polymère soluble dans l'eau ayant un poids moléculaire d'au moins 500 et au plus de 100 000 ;



10

et dans lequel le polymère soluble dans l'eau a au moins un type de groupement fonctionnel choisi parmi l'un des groupements 1 à 5 suivants :


15



20



25



30

dans lesquels  $m$  est égal à 0 ou à un nombre entier de 1 à 50 ;  $n$  est égal à 0 ou à 1 ;  $\text{M}$  représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $\text{R}^5$  et  $\text{R}^6$  représentent indépendamment un groupement alkylène ayant 2 à 4 atomes de carbone ;  $\text{R}^7$  représente un groupement alkylène ayant 1 à 5 atomes de carbone ; si  $m$  est égal ou supérieur à 2, tous les groupements  $\text{R}^5\text{O}$  peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière.

35








14. Procédé de fabrication d'un adjuvant de ciment selon la revendication 13, dans lequel le polymère soluble dans l'eau a, en outre, au moins un type de groupement fonctionnel choisi parmi les groupements 1 à 5 et au moins un type de groupement fonctionnel choisi parmi les groupements 6 à 12 suivants :

40

45


50

55

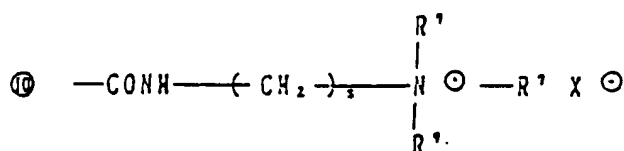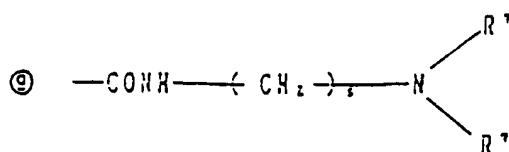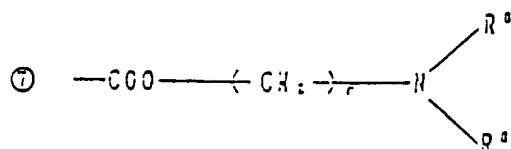

dans lesquels p est un nombre entier de 1 à 10 ; q est égal à 0 ou à un nombre entier de 1 à 100 ; r et s sont indépendamment égaux à un nombre entier de 1 à 3 ; t et u sont indépendamment égaux à un nombre entier de 1 à 100 ; A<sup>1</sup> est un groupement bivalent ou trivalent en boucle ouverte d'un alkylèneimine à 2 ou 4 atomes de carbone (dans le cas d'un groupement bivalent, A<sup>1</sup> est du type chaîne droite, et dans le cas d'un groupement trivalent, A<sup>1</sup> est du type ramifié) ; R<sup>5</sup> représente un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>8</sup> représente CH<sub>3</sub> ou C<sub>2</sub>H<sub>5</sub> ; R<sup>9</sup> représente H, CH<sub>3</sub> ou C<sub>2</sub>H<sub>5</sub> ; R<sup>10</sup> représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ; X<sup>-</sup> représente une paire d'anions ; si p est égal ou supérieur à 2, tous les groupements A<sup>1</sup> peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ; si q est différent de 0, la disposition de A<sup>1</sup> et de R<sup>5</sup>O peut être normale ou inversée et peut être régulière ou irrégulière ; si q est égal ou supérieur à 2, t est égal ou supérieur à 2 et u est égal ou supérieur à 2, respectivement, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ; et si un groupement représenté par le même symbole est présent deux fois ou plus, tous ces groupements n'ont pas besoin d'être identiques.

15. Procédé de fabrication d'un adjuvant de ciment selon la revendication 14, comprenant l'obtention d'un polymère réticulé par réaction d'un monomère (e) dans la plage de 0,1 à 50 % en poids, d'un monomère (xiv)

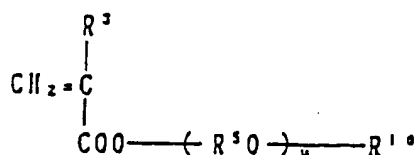

dans lequel u est un nombre entier de 1 à 100 ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>5</sup> représente un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>10</sup> représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ; et si u est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être


identiques ou différents et leur disposition peut être régulière ou irrégulière ;  
 dans une plage de 1 à 98,9 % en poids,  
 et d'un monomère (i)



dans lequel M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ;

dans une plage de 1 à 98,9 % en poids, la somme de (e), (xiv) et (i) constituant 100 % en poids.

16. Procédé de fabrication d'un adjuvant de ciment selon la revendication 13, comprenant l'étape d'obtention d'un polymère réticulé à partir d'un monomère (e), d'un monomère (iv)

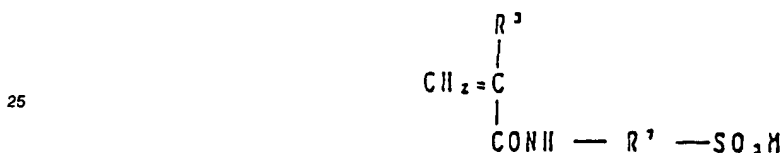


dans lequel M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>7</sup> représente un groupement alkylène ayant 1 à 5 atomes de carbone ;  
 et d'un monomère (i)



dans lequel M représente soit un atome d'hydrogène, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ;

dans un rapport pondéral de 0,1 à 50 % de monomère (e), de 1 à 98,9 % de monomère (iv) et de 1 à 98,9 % de monomère (i), la somme de (e), (iv) et (i) constituant 100 % du poids.


17. Procédé de fabrication d'un adjuvant de ciment selon la revendication 14, comprenant l'étape d'obtention d'un polymère réticulé à partir d'un monomère (e), d'un monomère (xiv)

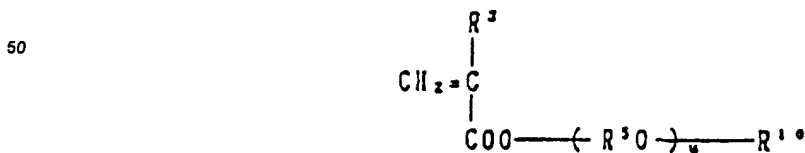


dans lequel u est un nombre entier de 1 à 100 ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>5</sup> représente un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>10</sup> représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ; et si u est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être



identiques ou différents et leur disposition peut être régulière ou irrégulière ;  
d'un monomère (iv)

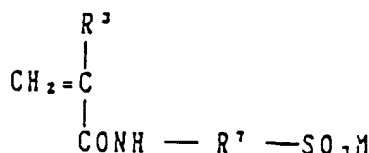


dans lequel M représente soit un atome d'hydrogène, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $R^3$  représente H ou  $CH_3$  ;  $R^7$  représente un groupement alkylène ayant 1 à 5 atomes de carbone ;  
et d'un monomère (i)




dans lequel M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $R^3$  représente H ou  $CH_3$  ;

dans un rapport pondéral de 0,1 à 50 % de monomère (e), de 1 à 70 % de monomère (xiv), de 1 à 97,9 % de monomère (iv) et de 1 à 97,9 % de monomère (i), la somme de (e), (xiv), (iv) et (i) constituant 100 % du poids.

18. Procédé de fabrication d'un adjuvant de ciment selon la revendication 13, comprenant l'étape d'obtention d'un polymère réticulé à partir d'un monomère (e), d'un monomère (iii)

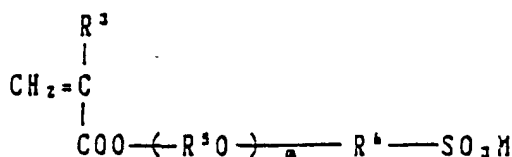


dans lequel m est égal à 0 ou à un nombre entier de 1 à 50 ; M représente soit un atome d'hydrogène quelconque, soit un métal monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $R^3$  représente H ou  $CH_3$  ;  $R^5$  et  $R^6$  représentent indépendamment un groupement alkylène ayant 2 à 4 atomes de carbone ; si m est égal ou supérieur à 2, tous les groupements  $R^5O$  peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ;  
et d'un monomère (i)




dans lequel M représente soit un atome d'hydrogène, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ;  $R^3$  représente H ou  $CH_3$  ;

dans un rapport pondéral de 0,1 à 50 % de monomère (e), de 1 à 98,9 % de monomère (iii) et de 1 à 98,9 % de monomère (i), la somme de (e), (iii) et (i) constituant 100 % du poids.


19. Procédé de fabrication d'un adjuvant de ciment selon la revendication 14, comprenant l'étape d'obtention d'un polymère réticulé à partir d'un monomère (e), d'un monomère (xiv)

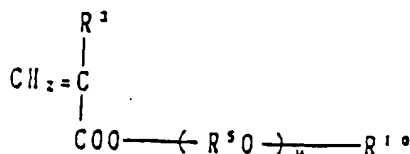

dans lequel u est un nombre entier de 1 à 100 ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>5</sup> représente un groupement alkylène ayant 2 à 4 atomes de carbone ; R<sup>10</sup> représente H ou un groupement alkyle ayant 1 à 5 atomes de carbone ; et si u est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ;  
d'un monomère (iii)

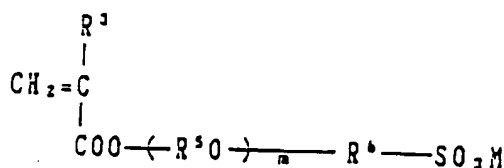

dans lequel m est égal à 0 ou à un nombre entier de 1 à 50 ; M représente soit un atome d'hydrogène quelconque, soit un métal monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ; R<sup>5</sup> et R<sup>6</sup> représentent indépendamment un groupement alkylène ayant 2 à 4 atomes de carbone ; si m est égal ou supérieur à 2, tous les groupements R<sup>5</sup>O peuvent être identiques ou différents et leur disposition peut être régulière ou irrégulière ;  
et d'un monomère (i)



dans lequel M représente soit un atome d'hydrogène quelconque, soit un groupement métallique monovalent, bivalent ou trivalent, soit un groupement ammonium ou un groupement amine organique ; R<sup>3</sup> représente H ou CH<sub>3</sub> ;

dans un rapport pondéral de 0,1 à 50 % de monomère (e), de 1 à 70 % de monomère (xiv) dans un ensemble de mono(méth)acrylates de (poly)alkylèneglycol, de 1 à 97,9 % de monomère (iii) et de 1 à 97,9 % de monomère (i), la somme de (e), (xiv), (iii) et (i) constituant 100 % du poids.

20. Procédé de fabrication d'un adjuvant de ciment selon l'une quelconque des revendications 13 à 19, dans lequel le monomère (e) est au moins un type de groupement choisi parmi les groupements 1 à 5 suivants :

1. Un produit de réaction d'au moins un composé choisi parmi les diols de monoester et les polyols de polyester, avec un monomère polymérisable ayant un groupement fonctionnel susceptible de réagir avec un groupement hydroxy des diols ou polyols ci-dessus ;
2. Un produit de réaction d'au moins un composé choisi parmi les acides dicarboxyliques de monoester et les acides polycarboxyliques de polyester, avec un monomère polymérisable ayant un groupement fonctionnel susceptible de réagir avec un groupement carboxyle des acides ci-dessus ;
3. Un produit de réaction d'au moins un composé choisi parmi les composés de polyols et de polyépoxy, avec un monomère polymérisable ayant un groupement carboxyle séparé d'une double liaison polymérisable par au moins un atome de carbone ;

4. Un produit de réaction d'au moins un composé provenant de l'acide polycarboxylique avec un monomère polymérisable ayant un groupement hydroxyle ou un groupement époxy séparé d'une double liaison polymérisable par au moins un atome de carbone ;
5. Un produit de réaction d'au moins un composé choisi parmi les composés de polyépoxy de monoester et les composés de polyépoxy de polyester ayant un groupement fonctionnel susceptible de réagir avec le groupement époxy des composés de polyépoxy.
21. Procédé de fabrication d'un adjuvant de ciment selon l'une quelconque des revendications 13 à 20, dans lequel le polymère réticulé a une viscosité égale ou inférieure à  $100 \text{ Nsm}^{-2}$  dans une solution aqueuse à 20 % en poids, ou à l'état dispersé dans l'eau à une température de  $20^\circ \text{C}$ .
22. Composition de ciment dans laquelle l'adjuvant de ciment selon la revendication 1, le ciment et l'eau sont des composants essentiels.
23. Composition de ciment dans laquelle l'adjuvant de ciment obtenu par les procédés de fabrication des revendications 4 à 13, le ciment et l'eau sont des composants essentiels.

FIG. 1

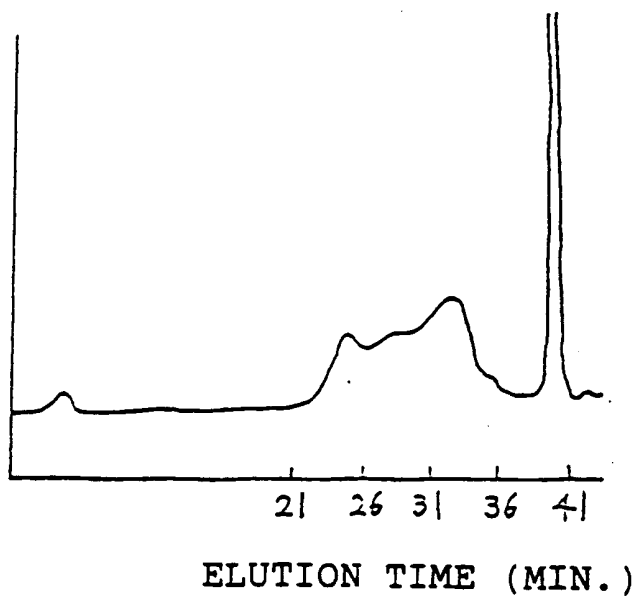


FIG. 2

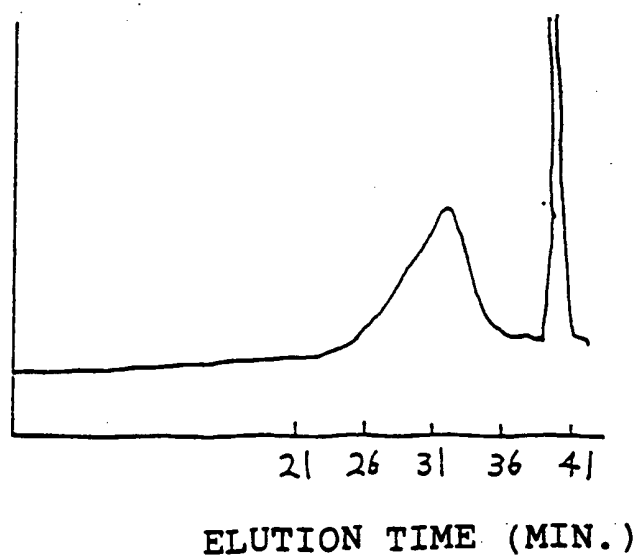


FIG. 3

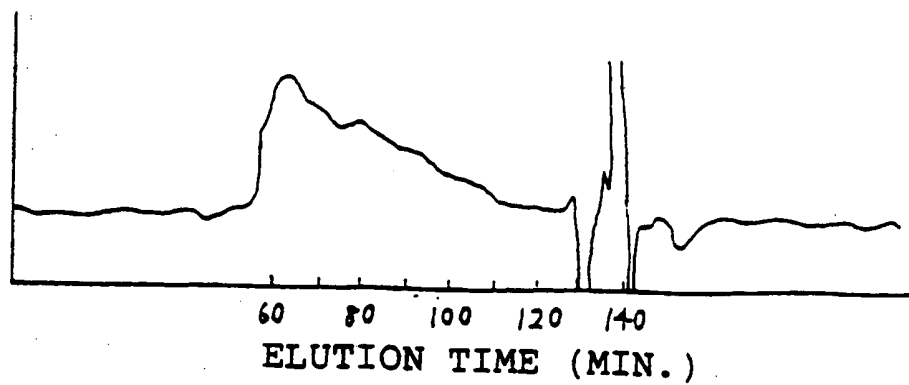


FIG. 4

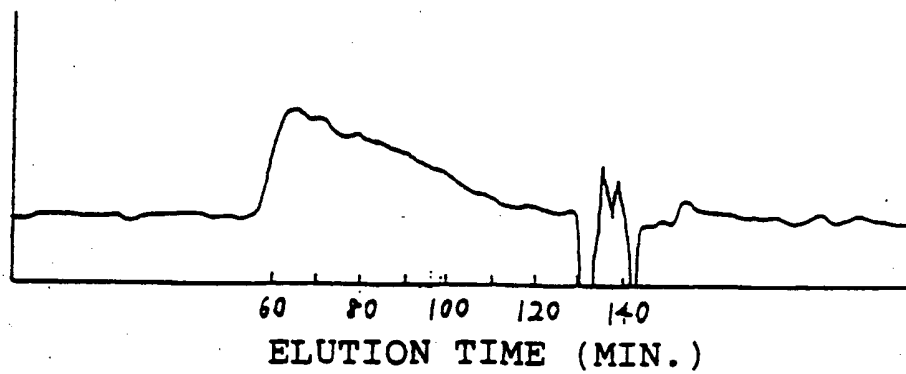


FIG. 5

